


1 2 3 4 5 6 7 8


A



5.08

A

B

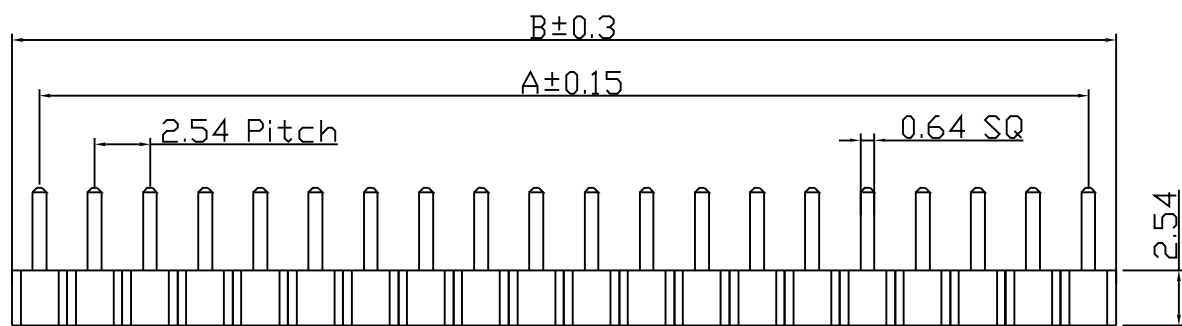

$B \pm 0.3$

$A \pm 0.15$


2.54 Pitch

0.64 SQ

2.54

B

C

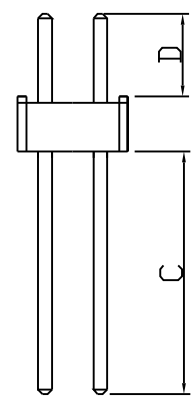


C

D

D

E

E

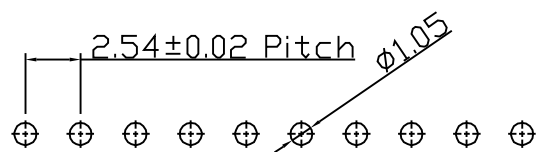

P.C.Board Layout

$A = 2.54 * (\text{NO. OF SPACES} - 1)$
 $B = A + 2.54$

POLES	PART NO.	DIM.			
		A	B	C	D
80	C2200-80BSGKC0	99.06	101.60	12.46	3.00

F

F

G

G

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	2.54mm PIN HEADER 180° DUAL ROW(C=12.46 D=3.0)	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	C2200-80BSGKC0 (2200D-2X40PSG1-KA)	A

H

H

制表日:2003/12/9

DRAWING.	APPROVED
Jane	

1 2 3 4 5 6 7 8