

# Bipolar Hall Effect Switch IC with built-in pull high resistor

#### Features:

- Operates from 2.4V to 24V supply voltage
- Operates with magnetic fields from DC to 15kHz
- On-chip Hall Sensor and  $25k\Omega$  pull-high resistor
- On-chip temperature compensation circuitry minimizes shifts in on and off points and hysteresis over temperature and supply voltage
- Ideal sensor for speed measurement, revolution counting, positioning, DC Brushless motor.

### **Functional Description:**

WSH133 is designed to integrate Hall sensor with output driver together on the same chip, it is suitable for speed measurement, revolution counting, positioning. It includes a temperature compensated voltage regulator, a differential amplifier, a Hysteresis controller and a output driver capable of sinking up to 20mA current load. An on-chip protection resistor is implemented to prevent reverse power fault.

The temperature-dependent bias increases the supply voltage of the hall plates and adjusts the switching points to the decreasing induction of magnets at higher temperatures. Subsequently, the output can keep switching on/off on more precise switch point regardless to the ambient temperature. WSH133 are rated for operation over temperature range from –40° C to 125 °C and voltage ranges from 2.4V to 24V.

### **Pin Descriptions:**

Name	P/I/O	Pin#	Description
Vdd	P	1	Positive Power Supply
Gnd	О	2	Ground
Vout	О	3	Output Pin



# Absolute Maximum Rating (at Ta=25°C)


Supply Voltage	Vcc	;	26V
Output breakdown Voltage	Vou	t <sub>(breakdown)</sub>	26V
Magnetic flux density	В		Unlimited
Output ON Current (continuous)	Ic		20 mA
Operating Temperature Range	Ta		$(-40^{\circ}\text{C to } + 125^{\circ}\text{C})$
Storage Temperature Range	Ts		$(-65^{\circ}\text{C to } +150^{\circ}\text{C})$
Package Power Dissipation	Pd		500mw

### **Electrical Characteristics:**

### (T=+25°C, Vcc=2.4V to 24V)

Characteristic	Symbol	<b>Test Conditions</b>	Min	Тур	Max	Units
Supply Voltage	Vcc	_	2.4		24	V
Output Saturation Voltage	Vout (sat)	Vcc=12V,Ic=10mA B = 0 Guass		0.2	0.6	V
Output Leakage Current	Ileakage	Vcc=12V, B < Brp		<0.1	10	uA
Supply Current	Isupply	Vcc=12V, B > Bop		2.4	4	mA

## **Function Block:**

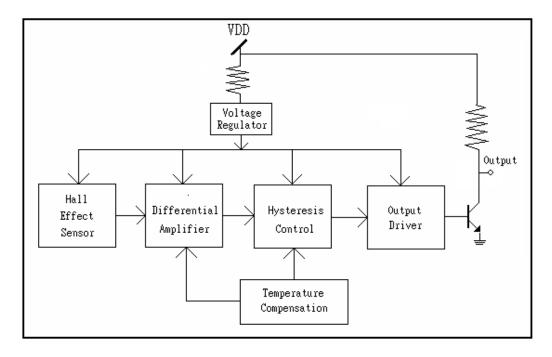




# **Magnetic Characteristics:**


Characteristic	Symbol	Grade	Min.	Typ.	Max.	Unit
Operating Point	Bop	1	+5		+ 90	Gauss
Release Point	Brp	1	-90		-5	Gauss
Hysteresis Window	Bhys			100	140	Gauss

<sup>\*+</sup> mean South magnetic field, 1mT=10 Gauss

### **Order Information:**

# **Application Circuit:**






0.15+-0.1mm



# Package Information:

### TO-92S:

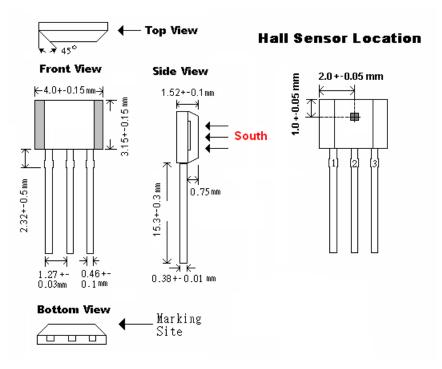

## SOT23:

