
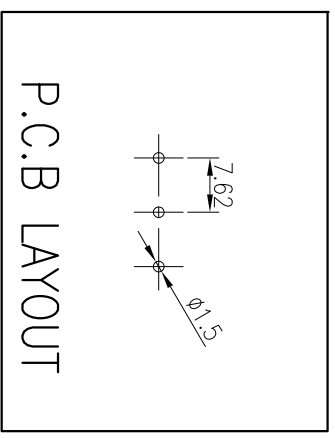
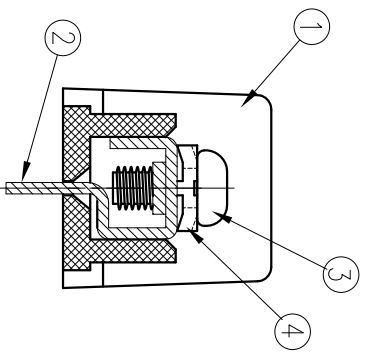

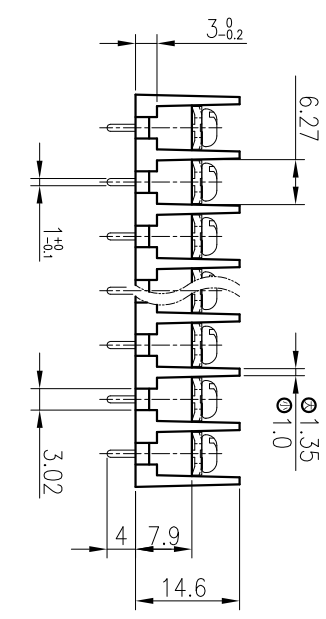


| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|--------|
| P | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | COMMERCIAL TOLERANCE | |
| A40.8 | - | 16.75 | 24.37 | 31.99 | 39.61 | 47.23 | 54.85 | 62.47 | 70.09 | 77.71 | 85.33 | 92.95 | 100.57 | 108.19 | 115.81 | 123.43 | 131.05 | 138.67 | 146.29 | 153.91 | 161.53 | 169.15 | 176.77 | 184.39 | 192.01 | 199.63 | 207.25 | 214.87 | 222.49 | 230.11 | 0.5 to 3 | ± 0.12 |
| B±0.5 | - | 7.62 | 15.24 | 22.86 | 30.48 | 38.10 | 45.72 | 53.34 | 60.96 | 68.58 | 76.20 | 83.82 | 91.44 | 99.06 | 106.68 | 114.30 | 121.92 | 129.54 | 137.16 | 144.78 | 152.40 | 160.02 | 167.64 | 175.26 | 182.88 | 190.50 | 198.12 | 205.74 | 213.36 | 220.98 | over 3 to 6 | ± 0.16 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | over 6 to 10 | ± 0.18 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | over 10 to 18 | ± 0.22 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | over 18 to 30 | ± 0.25 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | over 30 to 50 | ± 0.3 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | over 50 to 80 | ± 0.35 |

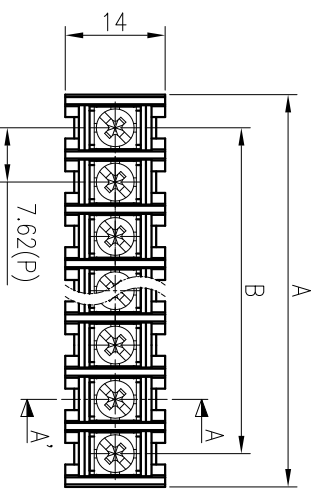

SPECIFICATION

- 정격 : 250V 10A
- 절연 저항 : DC 500V 1000MΩ 이상
- 내전압 : AC2000V/min
- 사용온도범위 : -40°C ~ 85°C
- 조임 Torque 권고치 : 5kgf·cm 이내

*본 제품은 유해 물질 관리 기준치를 초과하지 않는 제품임 (RoHS Compliance)

| | | | | | | |
|----------|---------|---------|----------|------------------------|------|-------|
| DRAWN | CHECKED | CHECKED | APPROVED | THIRD ANGLE PROJECTION | | |
| S.M JUNG | | | | DATE | UNIT | SCALE |
| 12.05.17 | | | | 2012.05.17 | MM | 1:1 |



BEE-PIYONG ELECTRONICS CO., LTD.

| | | | | | | | | | | | | | | | | | |
|-----------|--|-----------|--|-----|--|----------|--|-----------|--|----------|--|------|--|------------------|--|--------|--|
| DWG No. | | TITLE | | No. | | PART No. | | PART NAME | | MATERIAL | | Q'ty | | REMARKS | | FINISH | |
| BRT - 047 | | BR - 762C | | ④ | | BOLT- | | WASHER | | SPCC | | P | | □ 6X6 | | Ni | |
| | | | | ③ | | BOLT- | | SCREW | | SWCH10A | | P | | M3X6 | | Ni | |
| | | | | ② | | DM-762C | | TERMINAL | | BRASS | | P | | C2680R 1/2H 10.8 | | Sn | |
| | | | | ① | | SC-762 | | FRAME | | PBT | | 1 | | UJ94V-0 (G30) | | BK | |