


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (230°C for 10 seconds)

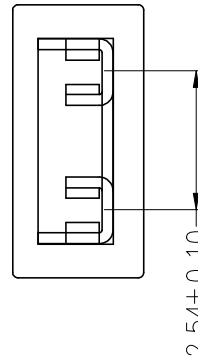

Ordering Information



3810 65 01 C XX X 0X

Plastics Height
65=6.5mm

No.of Pins
01=Sing Type

Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 G6:10U" Gold
 N0:Gold Flash/Ni
 NN:Ni

Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

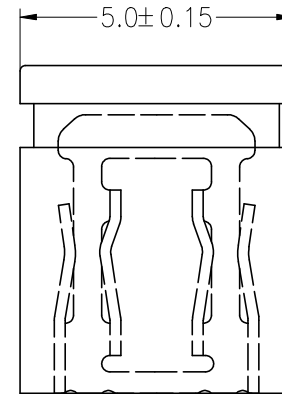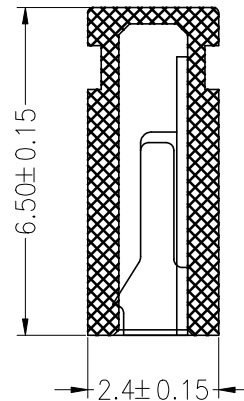

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--|-----------|-------|---------|-------------|----------|-------|-----|---|--|
| | | | | OPERATION | | DRAW | Fengguodong | 21.06.30 | SCALE | FIT | JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992 | |
| | | | | X.X | ±0.30 | | | | UNIT | mm | | |
| | | | | | | CHECK | | | SIZE | A4 | PART NO. 38106501CXXX0X TITLE: 2.54 Mini Jumper 1*2Pin Close Type | |
| | | | | X.XX | ±0.20 | | | | SHEET | 1/1 | | |
| A0 | 2021.06.30 | NEW DRAWING | | | | APPROVE | | | PROJ. | | | |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | | | | | DIM | TOL | | |