

Compact(UW-AAA)한글메뉴얼



Compact

Available for iPhone® and Android™

- 206 x 156 Thermal Sensor
- 36° Field of View
- < 9 Hz Frame Rate
- 1,000 ft. Detection Distance
- Focusable Lens
- -40F° to 626°F Detection
- Waterproof Case Included
- Photos & Videos
- Spot Temperature
- High-Low Temperature
- Threshold Mode
- 9 Color Palettes
- Auto Mode Only
- Auto Emissivity



CompactXR

Available for iPhone® and Android™

- 206 x 156 Thermal Sensor
- 20° Field of View
- < 9 Hz Frame Rate
- 1,800 ft. Detection Distance
- Focusable Lens
- -40F° to 626°F Detection
- Waterproof Case Included
- Photos & Videos
- Spot Temperature
- High-Low Temperature
- Threshold Mode
- 9 Color Palettes
- Auto Mode Only
- Auto Emissivity








CompactPRO

Available for iPhone® and Android™


- 320 x 240 Thermal Sensor
- 32° Field of View
- > 15 Hz Frame Rate
- 1,800 ft. Detection Distance
- Focusable Lens
- -40F° to 626°F Detection
- Waterproof Case Included
- Photos & Videos
- Spot Temperature
- High-Low Temperature
- Threshold Mode
- 9 Color Palettes
- Auto & Span/Level Control
- Adjustable Emissivity

1. 메뉴버튼

	Home icon
	Media icon
	Mode icon
	Filters icon
	Settings icon

- 1-1. Home: SEEK사 홈페이지로 이동
- 1-2. Media: 스마트폰 사진갤러리로 이동
- 1-3. Mode: 측정모드 선택
- 1-4. Filters: 열화상 팔레트 선택
- 1-5. Settings: 카메라 셋팅


2. 측정모드

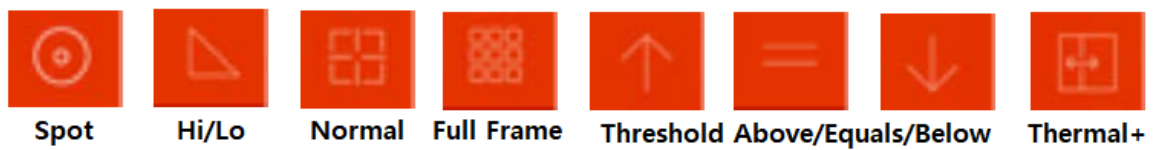


- 2-1. Spot: 가운데 포인트 온도표시




2-2. Hi/Lo: 최고점/최저점 온도표시

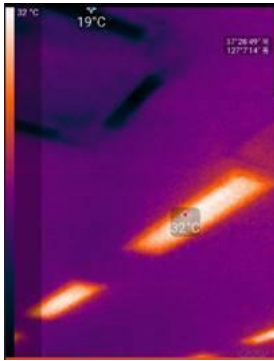

2-3. Normal: 온도포인트 없이 열화상만 표시

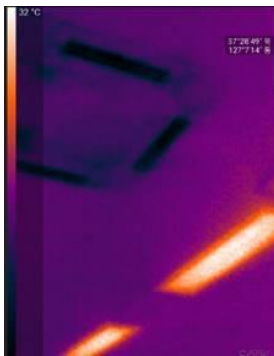

2-4. Full Frams: 왼쪽 막대바에 구간별 온도표시

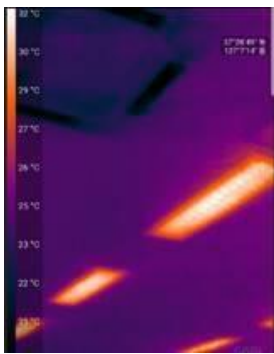


2-5. Threshold Above/Equals/Below:


- Above: 설정온도보다 높은온도만 열화상 표시




- Equals: 설정온도와 동등한온도만 열화상 표시

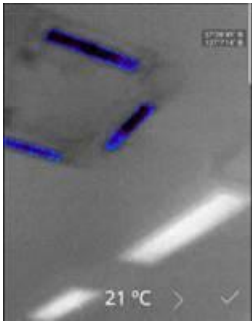

- Below: 설정온도보다 낮은온도만 열화상 표시

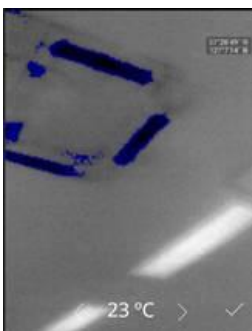

2-6. Thermal+: 실화상, 열화상 동시표시

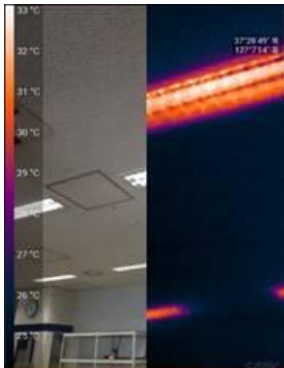

3. 촬영모드 전환(단일샷->비디오촬영)



촬영버튼을 우측으로 밀면 동영상모드로 변환

