


# 1N4933 Thru 1N4937




## 1 AMP FAST RECOVERY RECTIFIER

### FEATURES

- Rating to 1000V PRV
- Low cost
- Diffused junction
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with freon, alcohol, chloroethene and similar solvents
- UL recognized 94V-O plastic material

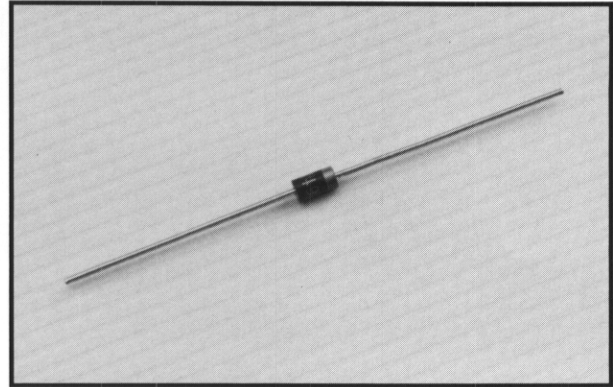

### Outline Drawing

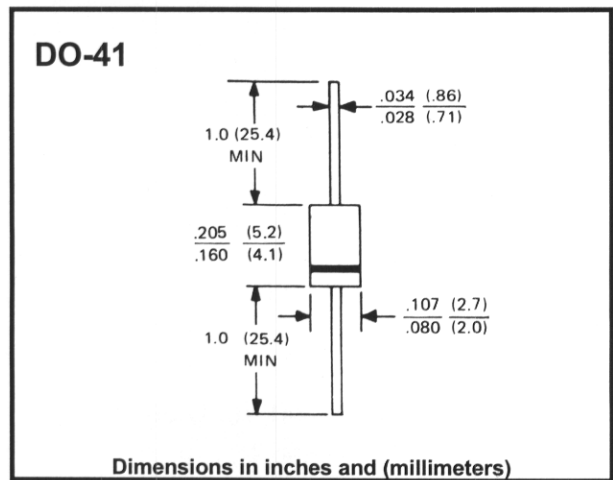

### Mechanical Data

- Case: JEDEC DO-41
- Terminals: Axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Weight: 0.012 ounce, 0.3 grams
- Mounting Position: Any

### Maximum Ratings & Characteristics

- Ratings at 25° C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load, derate current by 20%

		1N4933	1N4934	1N4935	1N4936	1N4937	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	V
Maximum DC Blocking Voltage	$V_{DC}$	60	100	200	400	600	V
Maximum Average Forward Rectified Current	$I_{(AV)}$	1.0					A
Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave Superimposed On Rated Load	$I_{FSM}$	30					A
Maximum Forward Voltage At 1.0A DC	$V_F$	1.2					V
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	5					$\mu A$
Maximum Reverse Recovery Time (Note 1)	$t_{rr}$	200					ns
Typical Junction Capacitance (Note 2)	$C_J$	15					pF
Typical Thermal Resistance (Note 3)	$R_{thJA}$	50					°C/W
Operating Temperature Range	$T_J$	-65 to +150					°C
Storage Temperature Range	$T_{STG}$	-65 to +175					°C

- Notes:
1. Measured with  $I_F = 1.0A$ ,  $V_R = 30V$ ,  $di/dt = 50A/\mu s$
  2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC
  3. Thermal resistance Junction to Ambient