



4611110008861

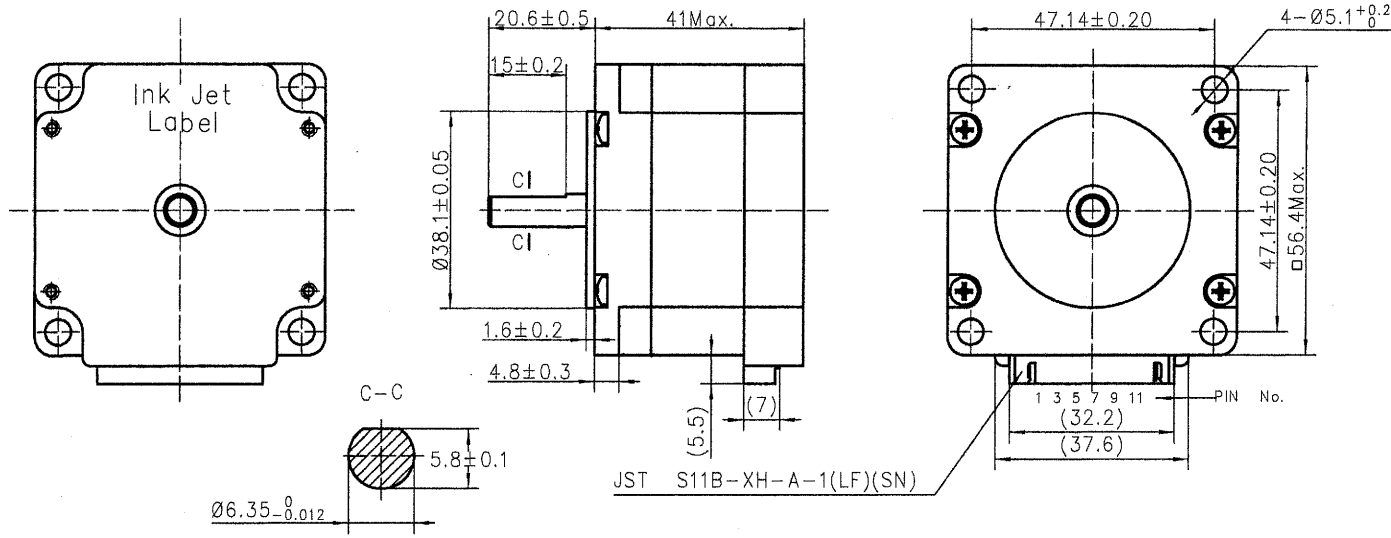

接线图
Wiring Diagram



励磁顺序 vs. 旋转方向
Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CCW
1	+	+	-	-	↑ CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向
Clockwise view from mounting side

规格 Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	1.3 V DC
4. 额定电流 Rated Current	2.0 Amp
5. 保持力矩 Holding Torque	0.39N.m Min.(Two phase on/rated current)
6. 相电阻 Phase Resistance	0.65±0.1 ohm(20°C)
7. 相电感 Phase Inductance	1.3 mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	135g.cm ²
9. 电机重量 Motor Weight	0.42kg
10. 绝缘等级 Insulation Class	B(130°C)

铭牌 Label Detail



Work Order
加工单号

Date Format
日期格式



Unit: mm 第一角画法 FIRST ANGLE METHOD	批准 Approve	7/20/11	5/10	MOONS'	Hybrid Stepping Motor			
未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m	标准化 Standard	2011.05.10	5.00		Shanghai Moons' Electric Co., Ltd.			
未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2:K	工艺 Technology	张利辉	11.05.10	This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited.				
A 原始版本 Original revision	审核 Check	张利辉	5.00	All trademarks and registered trademarks appearing on this document are the property of their respective owners.				
REV. 版本记录 REVISION RECORD	设计 Design	张利辉	2011.05.10	Type: 23HS0041-01	Rev.A	SCALE 1:1	Sheet 1 of 1	