


HYBRID STEPPING MOTOR TYPE 23HS0605

Performance & specifications				Wiring diagram	
Step angle	1.8°±5%	Rated voltage	4.9 V		
Number of phase	4	Rated current	1.0 A		
Insulation resistance	100Mohm Min.(500V DC)	Resistance per phase	4.9 ohm±10%		
Insulation class	Class B	Inductance per phase	5.6 mH±20%		
Rotor Inertia	135 g.cm ²	Holding torque	0.42 Nm		
Mass	0.42 kg	Detent torque	22 mNm	RED B WHT M BLU D 红 白 蓝	

Dimensions unit=mm

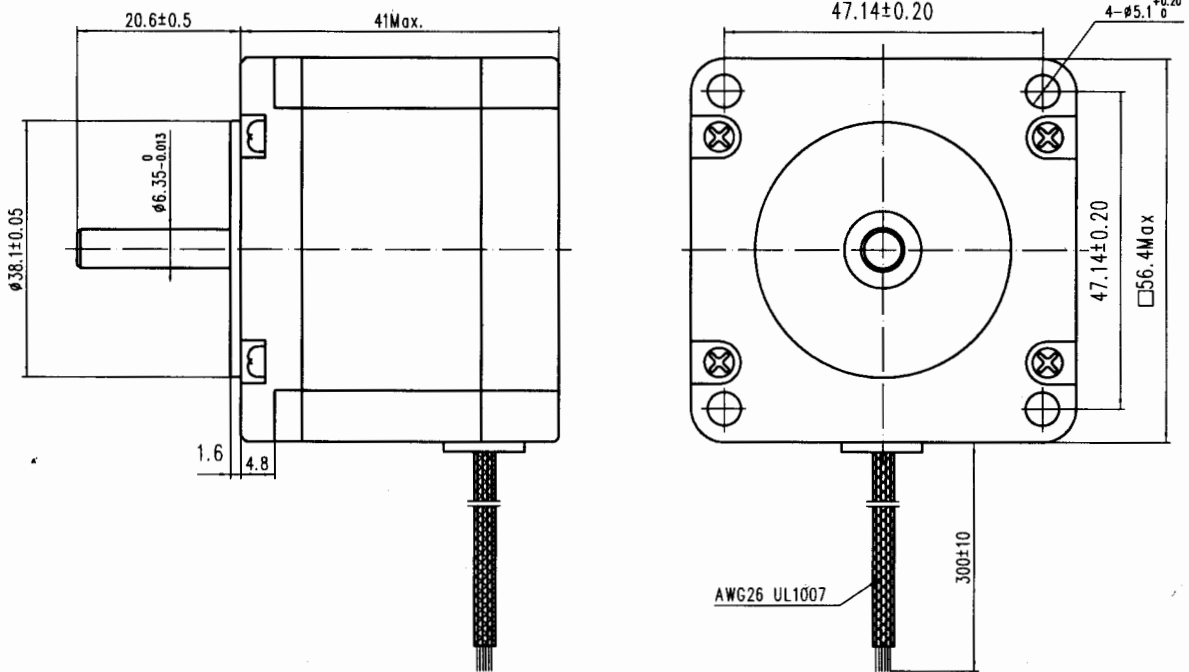

DRIVE SEQUENCE MODEL

STEP	A	B	C	D	O	M
1	-	-	-	-	+	+
2	-	-	-	-	+	+
3	-	-	-	-	+	+
4	-	-	-	-	+	+

ccw

CW(CLOCKWISE)&CCW(COUNTER CLOCKWISE) ROTATION
WHEN SEEN FROM THE FLANGE SIDE OF THE MOTOR

Rev.	Description	Date

Comment:

MS9.005.001