



04/05


Temperature Range	-50 ~ 700°C (-58 ~ 1292°F)
Accuracy	± 1.5% or ± 1.5°C Whichever is greater
Repeatability	± 1% or ± 1°C
Distance Spot Ratio	12:1
Emissivity	0.10~1.00 Adjustable
Resolution	0.1°C/0.1°F
Response Time	500ms
Wavelength	8-14 μm
MAX/MIN/AVG/DIF Reading	✓
High/Low Temperature Alarm Setup	✓
C/F Selection	✓
Data Hold Function	✓
Laser Target Pointer ON/OFF Selection	✓
Backlight ON/OFF Selection	✓
Auto Power Off	✓
Standard Quantity Per Carton	20PCS
Unit Size	50*111*172mm
Standard Carton Size	67.5*45.8*30.2CM
Standard Carton Gross Weight	16.8KG
Power	9V 6F22 Battery



Infrared Thermometer GM700

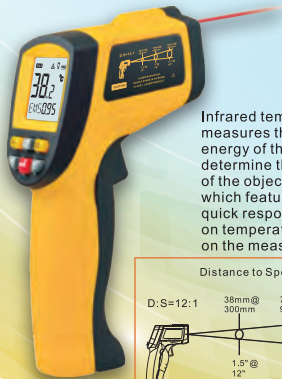

Infrared temperature meter measures the infrared energy of the object to determine the temperature of the object measured, which features non-contact, quick response, no impact on temperature attribution on the measured.



Infrared Thermometer GM900

Temperature Range	-50 ~ 900°C (-58 ~ 1652°F)
Accuracy	± 1.5% or ± 1.5°C Whichever is greater
Repeatability	± 1% or ± 1°C
Distance Spot Ratio	12:1
Emissivity	0.10~1.00 Adjustable
Resolution	0.1°C/0.1°F
Response Time	500ms
Wavelength	8-14 μm
MAX/MIN/AVG/DIF Reading	✓
High/Low Temperature Alarm Setup	✓
C/F Selection	✓
Data Hold Function	✓
Laser Target Pointer ON/OFF Selection	✓
Backlight ON/OFF Selection	✓
Auto Power Off	✓
Standard Quantity Per Carton	20PCS
Unit Size	50*111*172mm
Standard Carton Size	67.5*45.8*30.2CM
Standard Carton Gross Weight	16.8KG
Power	9V 6F22 Battery



CAUTION LASER RADIATION. DO NOT STARE IN TO BEAM. CLASS II LASER PRODUCT.