REV	DESCRIPTION	DRAWIN/DATE	CHECK/DATE	APPROVED/DATE
A0	NEW RELEASE	Leander 2006.04.20	Banyan 2006.04.20	Wangfan 2006.04.20















SECTION A-A

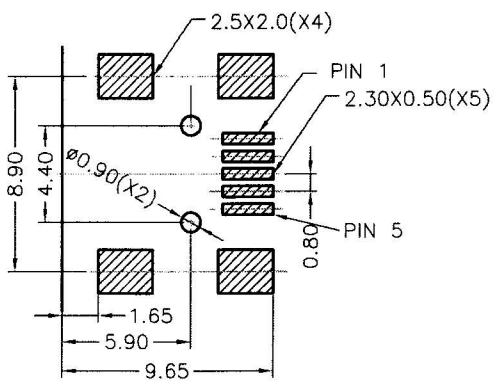

NOTES :

1.0. RATING :

1.1. VOTAGE : 30 VAC (R.M.S.)

1.2. CURRENT : 1.0 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE

1.3. TEMPERATURE : -55°C TO +85°C

2.0. ELECTRICAL CHARACTERISTIC :

2.1. CONTACT RESISTANCE : 30 MILLIOHMS MAXIMUM INITIAL

2.2. INSULATION RESISTANCE : 100 MEGOHMS MINIMUM

2.3. DIELECTIC WITHSTANDING VOLTAGE : 100 VAC AT SEE LEVEL

3. 标示注意事项:

3.1. 未标示公差者以一般公差处理之

3.2. 图示尺寸加注有 ▼ 号者为检验重点

PART NUMBERING CODE

ST-MINIUSB-6 - 5 * * * * 0

① ②③④⑤⑥

① SERIES :

MINIUSB-6 : MINI USB CONNECTOR, SERIES B,SMT TYPE

② POSITIONS:

5 : 5 POSITIONS.

③ INSULATOR COLOR & LOGO

K : BLACK (W/O LOGO)

④ CONTACT PLATING :

2: Au 3-5u"

5: Au 30u"

⑤ SHELL PLATING & LOGO :

1: TIN/LEAD W/O LOGO

2: Nickel W/O LOGO

⑥ MATERIAL OF INSULATOR:

0 : PBT

1 : PA-6T

2 : LCP

GENERAL TOLERANCE X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05	ANGLE TOLERANCE X° ±2.0° .X° ±1.0° .XX° ±0.5°	TECHNICS ELECTRONIC 仕昌电子(深圳)有限公司 SITORELECTRONICS(SHENZHEN)CO.,LTD.	
MAJOR(QC CHECKED) ▼ = 6 places	SCALE 1 : 1 UNIT mm	DESIGN Banyan DATE 04/18/06' CHECKED Leander DATE 04/18/06'	TITLE: MINI USB CONNECTOR, SERIES B TYPE SMT TYPE <CUSTOMER ASSEMBLY DRAWING>
SHEET 1 OF 1		APPROVED DATE	SERIES MINI USB SERIES SIZE A4 DRAWIN NO. C-ST-MINIUSB-6-00 REV. A0