

CENTRONIC Solder type Male Connector

P/N : CEN01- MXX(Pin Number)

* XX: 14, 24, 36, 50Pin

- Specification -

1. Material

Zinc plated. Tin plated or Nickel plated steel.

2. Pin Contact

Phosphor bronze or brass gold plated

3. INSULATOR

PBT & Glass fiber reinforced UL-94-VD

4. CURRENT RATING

5 Amp.

5. DIELECTRIC STRENGTH

1,000V for one minute


6. INSULATOR RESISTANCE

1,000Mohm min.

7. TEMPERATURE

-55℃ ~ +105℃

8. DRAWING

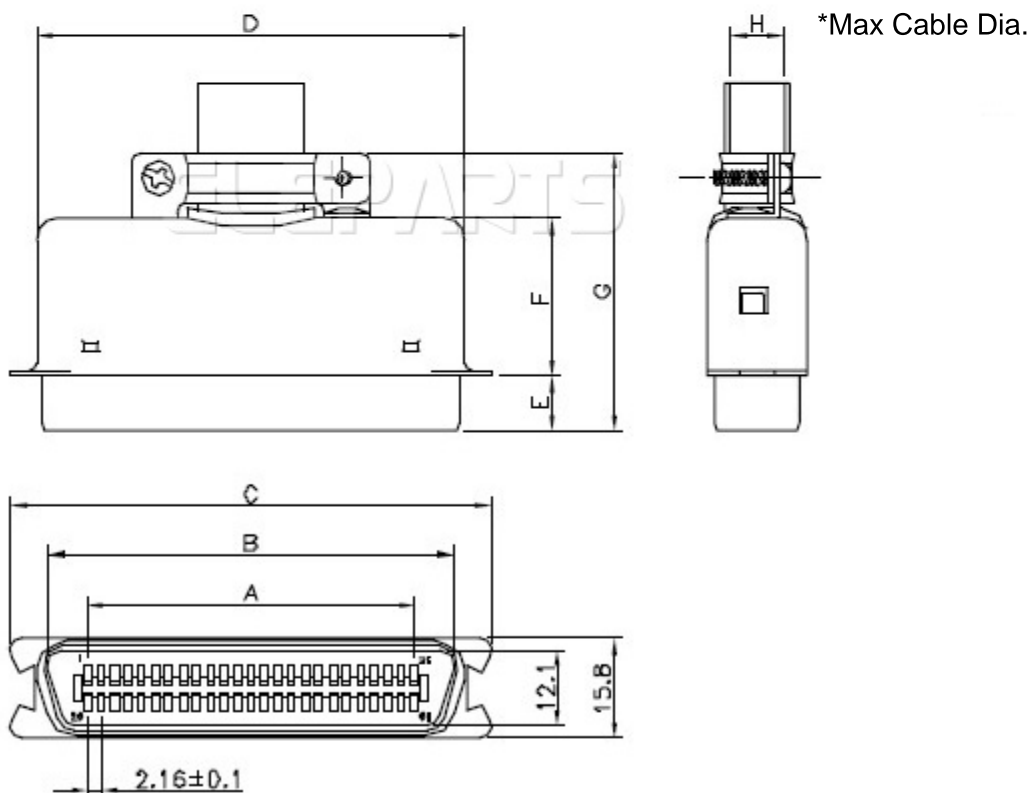

Positions	A	B	C	D	E	F	G	H
14	12.96	25.6	38.1	29.0	7.6	21.6	39.7	7.0
24	23.76	36.3	48.8	39.9	8.2	21.2	40.2	9.0
36	36.72	49.3	61.8	53.2	7.9	22.6	40.6	11.5
50	51.84	64.4	77.0	68.2	8.5	24.9	43.6	12.5