


2.54mm female Header Dual Straight Type

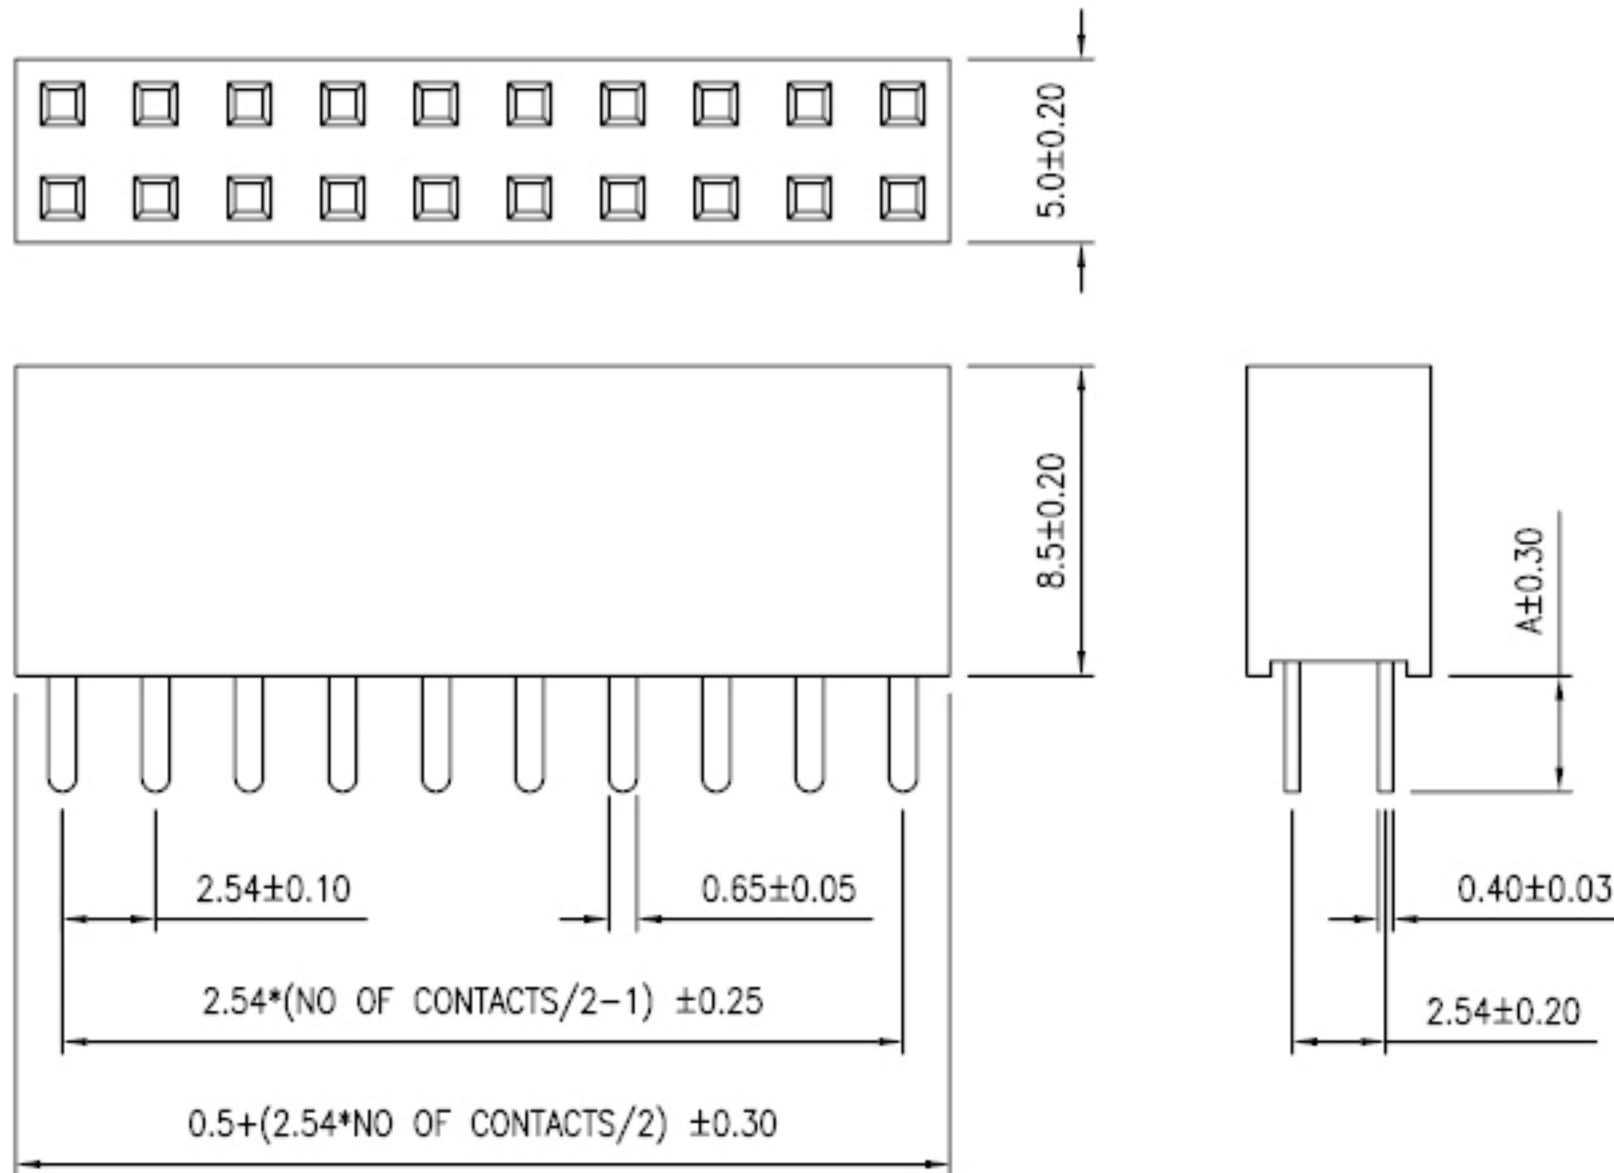

SPECIFICATION


- * Current Rating:
3 A
- * Withstanding Voltage:
500 VAC (1 min.)
- * Insulation Resistance:
1000 Megohms MIN.
- * Contact Resistance:
30 Milliohms MAX.
- * Operating Temperature:
-40°C to +85°C
- * Retention Force:
450g MIN.

MATERIAL

- * Contact: Brass
- * Insulator: PBT & 30% G. F.
- * Plated: Gold

Pin Chart

Pin	A
1	3.1
2	
3	
4	

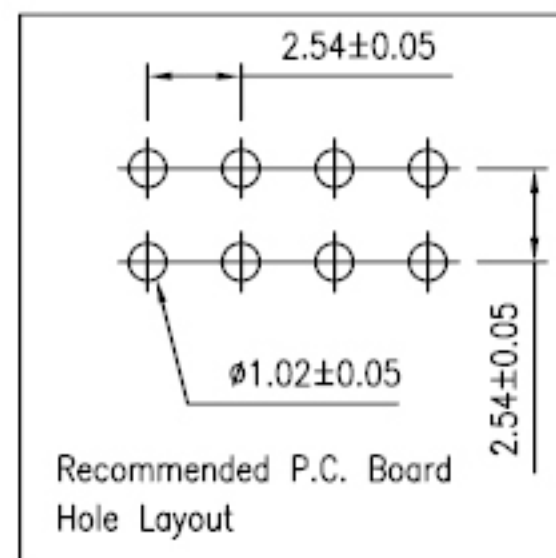

ELEPARTS CO., LTD

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT:	2.54X2.54MM (.100"*.100")	APP BY:
0.000±	MM	Female Header Dual Row profile: 8.5mm	CHK BY:
		MATL: PBT + 30% G.F.	DR BY:
		DWG. NO. FD11	

ELEPARTS
E-BUSINESS