
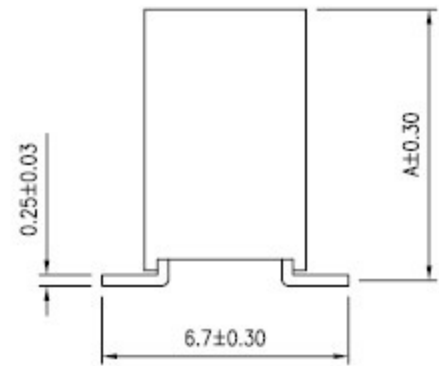
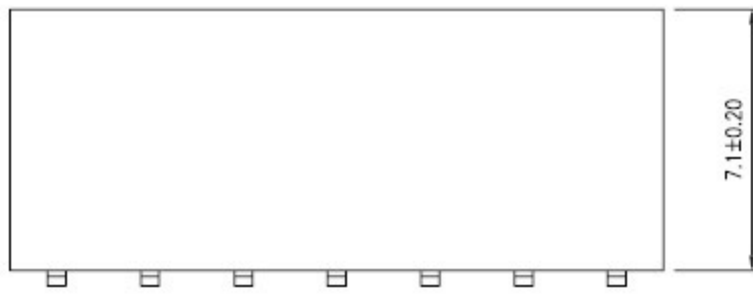


2.54mm Pitch Pin Female Header (FH12 Series)

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

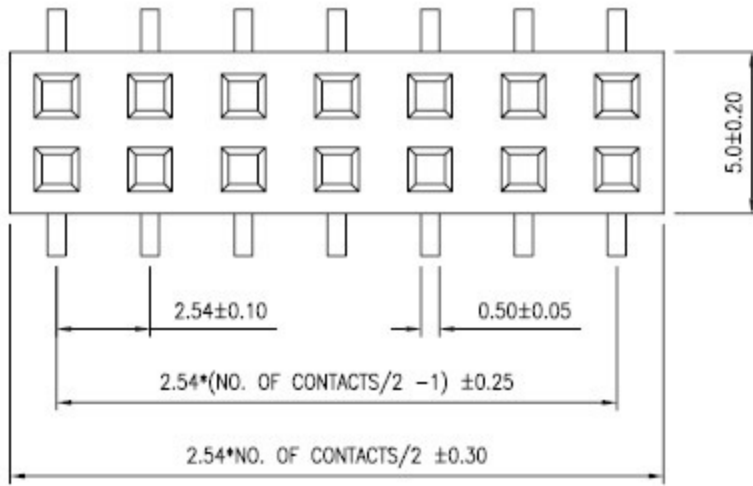

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 450g MIN.


MATERIAL

- * Contact: Phosphor Bronze
- * Insulator: NYLON 6T & 30% G. F.
- * Plated: Gold

Number of Pin
* 80Pin

Pin Chart

Pin	A
1	
2	
3	
4	



ELEPARTS Co.,Ltd			
0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT: MM	2.54X2.54MM (.100"*.100")	APP BY:
0.000±		Female Header SMD Dual Row Profile:7.1mm	CHK BY:
		MATL: NYLON 6T + 30% G.F.	DR BY:
		DWG. NO. FH12 Series	