




FILE NO: E302810

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40c to +105c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)


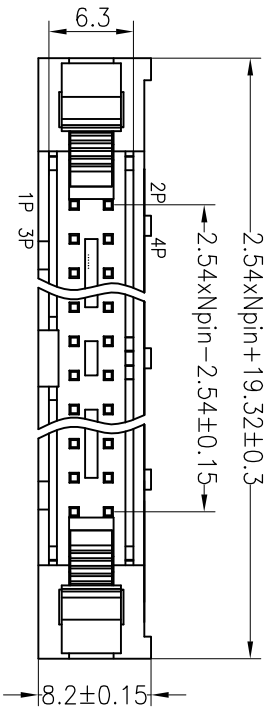


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

3310 XX S XX X X X X 0 1

- No. of Pins Row 6-64
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, S1:tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-PA6T, F=BK-LCP
- Color Type: B=Black, G=Grey
- Latch Type: L=Long Latch, S=Short Latch, N=Without Latch
- Packing Bag: O=PE Bag, A=Tray, T=Tube, P=Tube+Cap

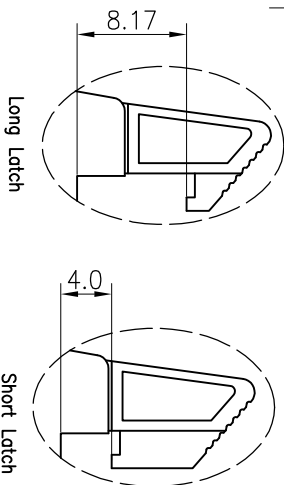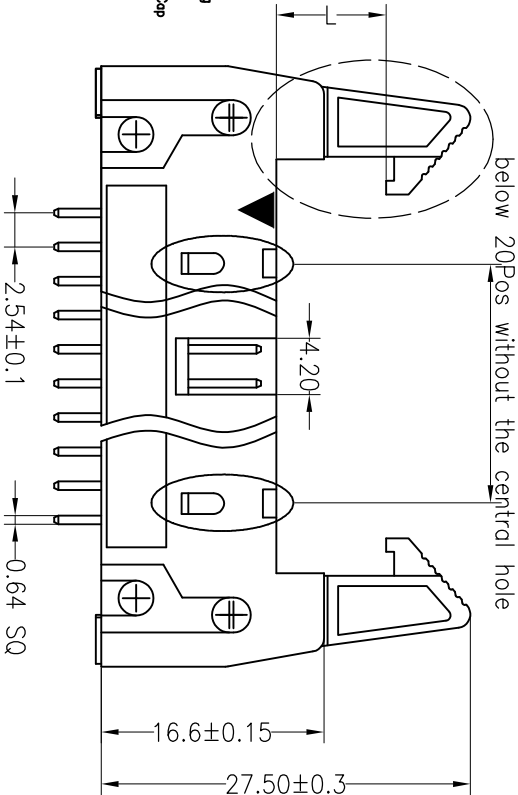

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	WZG	SCALE	FIT	PART NO.	TITLE:
A1	2014.05.08	DIP尺寸更改为3.2	①	X.X	±0.30	14.05.13	UNIT	mm	3310XXSXXXXX01	
A0	2012.03.28	NEW DRAWING		X.XXX	±0.20		SIZE	A4		
				Angle	±3°		SHEET	1/1		
				DIM	TOL	APPROVE	PROJ.			2.54 ejector header Npin 180°

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892