


P. C. B LAYOUT
TOP
VIEW

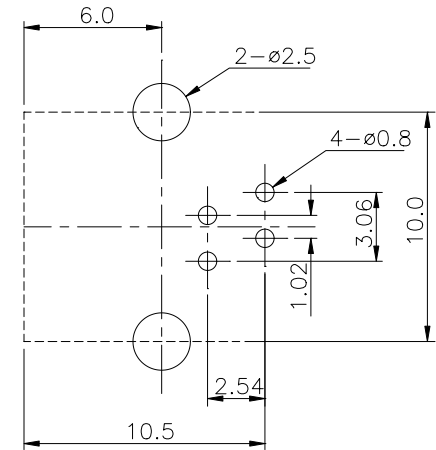

SPECIFICATION

1. Rating : AC 125V 1.5A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 1000M\Omega$ (DC500V);
4. Withstand voltage: 1000VAC ;
5. Insertion force: 15N;
Extraction force: 15N;
Locking force: 75N;
6. life test: 750 Mating cycles Min.

2	CONTACT FOOT	4	BRONZE	Au-Plating		
1	HOUSING	1	PBT/ABS			
NO.	DESCRIPTION	QTY	MATERIAL	PLATING		
UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1		
	PCB JACK	PCB-401 (4P4C2C)	TOLERANCE	ANGLES	SCALE	VER
			0.15	数1.5	3:1	1
DESIGNER BY:				旭日佳电子有限公司 BEST SUN ELECTRONIC CO.,LTD		
CHECK BY:						
APPROVED BY:						