


**P.C.B LAYOUT
TOP VIEW**

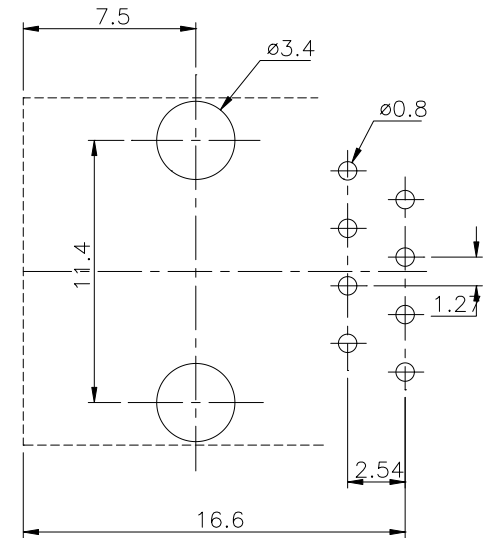

SPECIFICATION

1. Rating: AC 125V 1.5A;
2. Contact resistance: $\leq 30m\Omega$ □
- Roman|b0|i0|c0|p18;;
3. Insulation resistance: $\geq 100M\Omega$; (DC500V);
4. Withstand voltage: 1000VAC;
5. Insertion force: 15N,
Extraction force: 15N,
Locking force: 75N;
6. Life test: 750 Mating cycles min.

2	CONTACT FOOT	8	BRONZE	Au-Plating
1	HOUSING	1	PBT/ABS	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:		PAPER NO: A4
	PCB JACK	PCB-824A (8P8C)		PAGE 1 OF 1
			TOLERANCE	ANGLES
			0.15	数1.5
			SCALE	VER
			3:1	1
DESIGNER BY:		旭日佳电子有限公司 □ BEST SUN ELECTRONIC CO., LTD		
CHECK BY:				
APPROVED BY:				