


P. C. B LAYOUT

TOP
VIEW

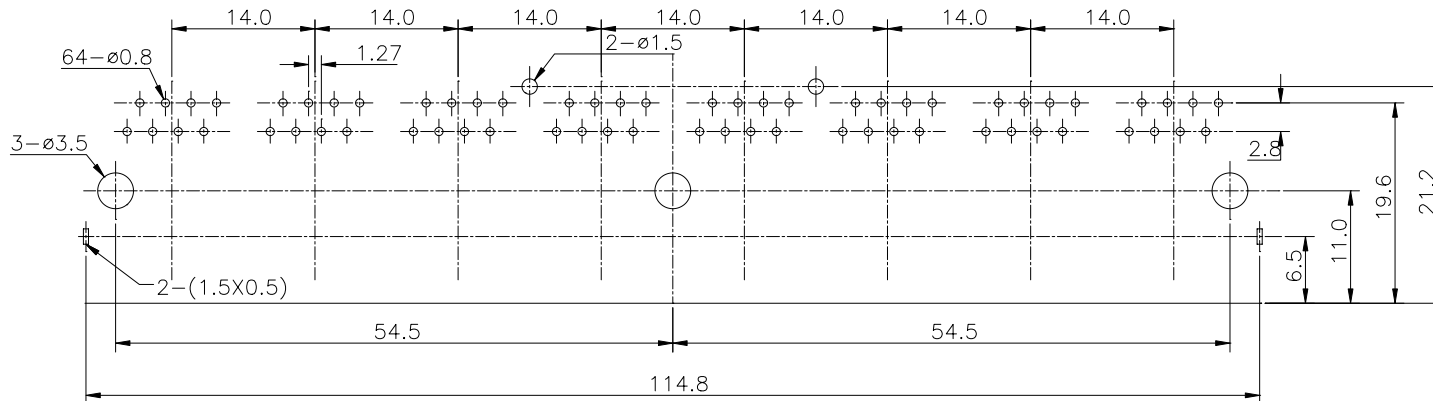

SPECIFICATION

1. Rating: AC 125V 1.5A;
2. Contact resistance: $d30m\Omega$ □
- Roman|b0|i0|c0|p18;;
3. Insulation resistance: $e100M\Omega$; (DC500V);
4. Withstand voltage: 1000VAC ;
5. Insertion force: 15N,
Extraction force: 15N,
Locking force: 75N;
6. Life test: 750 Mating cycles min.

3	COAT	1	BRASS	Ni-Plating
2	CONTACT FOOT	64	BRONZE	Au-Plating
1	HOUSING	1	PBT/ABS	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	
	PCB JACK	PCB-834 (8P8C)	TOLERANCE	ANGLE
			0.15	数1.5
DESIGNER BY:			SCALE	VER
CHECK BY:			3:1	1
APPROVED BY:				



旭日佳电子有限公司 □
 BEST SUN ELECTRONIC CO., LTD