
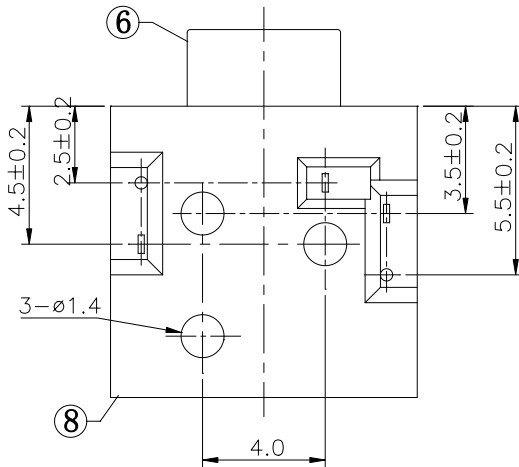


**P. C. B LAYOUT
TOP VIEW**

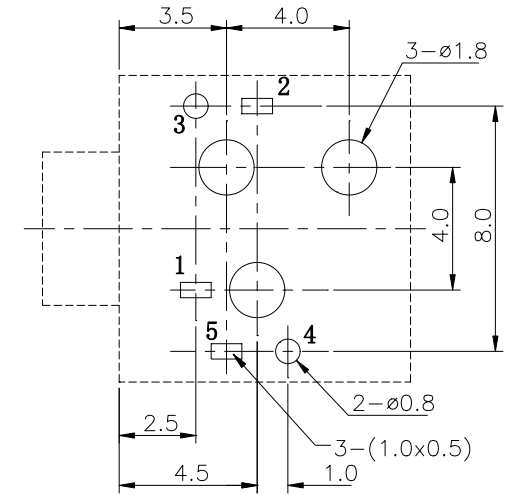

SCHEMATIC

| PJ-204 | PJ-204-1 | PJ-204-2 | PJ-204-3 |
|--------|----------|----------|----------|
| | | | |

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |
|-----|-----------------|-----|----------------------------|------------|
| 8 | HOUSING | 1 | PA66 | |
| 7 | COVER | 1 | PA66 | |
| 6 | AXIS SUPPORT | 1 | H59 BRASS | Ni-Plating |
| 5 | 5# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 4 | 4# CONTACT FOOT | 1 | PHOSPHOR BRONZE $\Phi 0.4$ | Ag-Plating |
| 3 | 3# CONTACT FOOT | 1 | PHOSPHOR BRONZE $\Phi 0.4$ | Ag-Plating |
| 2 | 2# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |
| 1 | 1# CONTACT FOOT | 1 | PHOSPHOR BRONZE | Ag-Plating |

| | | | | |
|----------|------------------|------------------|--------------|-------------|
| UNIT: MM | TYPE: PHONE JACK | MODEL NO: PJ-204 | PAPER NO: A4 | PAGE 1 OF 1 |
| | | | TOLERANCE | ANGLES |
| | | | 0.15 | 数1.5 |
| | | | SCALE | VER |
| | | | 4:1 | 1 |

DESIGNER BY: _____
 CHECK BY: _____
 APPROVED BY: _____



旭日佳电子有限公司
 BEST SUN ELECTRONIC CO., LTD