



**P. C. B LAYOUT
TOP VIEW**

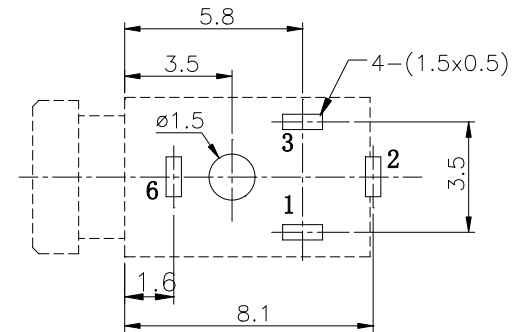

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	4# CONTACT FOOT	1	BRASS	Sn-Plating
5	HOUSING	1	PBT	
4	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ-210C	TOLERANCE	ANGLES
			0.15	4:1
			SCALE	VER
			4:1	1

DESIGNER BY: _____
 CHECK BY: _____
 APPROVED BY: _____



旭日佳电子有限公司
 BEST SUN ELECTRONIC CO., LTD