


SCHEMATIC

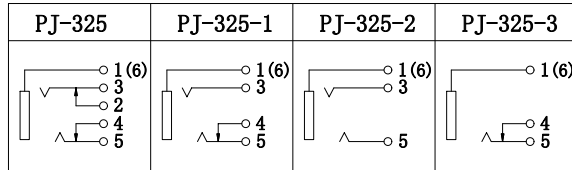

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
8	HOUSING	1	PBT/PA46	
7	COVER	1	PBT/PC	
6	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	H62 BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	CURVE PIECE	1	H62 BRASS	Sn-Plating
1	FLAT PIECE	1	H62 BRASS	Sn-Plating

UNIT:MM	TYPE: PHONE JACK	MODEL NO: PJ-325	PAPER NO: A4	PAGE 1 OF 1
			TOLERANCE	ANGLES
			0.15	1.5
			SCALE	VER
			3:1	1

DESIGNER		 旭日佳电子有限公司 BEST SUN ELECTRONIC CO.,LTD
BY:		
CHECK BY:		
APPROVED BY:		