


- SPECIFICATION**
1. Rating : DC 30V 0.5A;
  2. Contact resistance:  $d0.03\Omega$ ;
  3. Insulation resistance:  $e100M\Omega$  (DC250V);
  4. Withstand voltage: 500VAC ;
  5. Insertion and extraction force: 3-20N;
  6. life test: 5,000 cycles.

**SCHEMATIC**

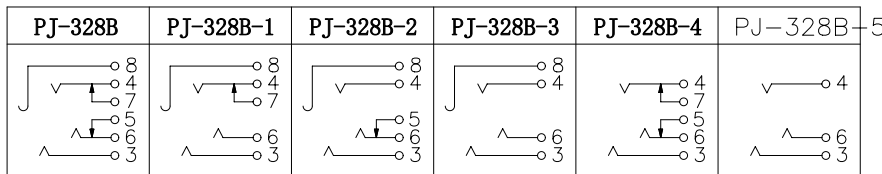

8	CONTACT FOOT	1	SUS301	Ag-Plating
7	CURVE PIECE	1	BRASS	Ag-Plating
6	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
5	CURVE PIECE	1	BRASS	Ag-Plating
4	CONTACT FOOT	1	SUS301	Ag-Plating
3	CONTACT FOOT	1	SUS301	Ag-Plating
2	COVER	1	PA9T	
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
		PHONE JACK	TOLERANCE	ANGLES
			0.15	数1.5
			SCALE	VER
			3:1	1

DESIGNER BY:		<b>旭日佳电子有限公司</b> BEST SUN ELECTRONIC CO., LTD
CHECK BY:		
APPROVED BY:		