


**Specifications**

- Current rating:1.0AAC/DC
- Voltage rating:250V AC/DC
- Contact resistance:15m ohm. max.
- Insulation resistance:10000M ohm. Min.
- Withstanding voltage:600V AC for one minute
- Operating temperature range:-40°C to +105°C

**Material and Finish**


- Insulator:High Temp. Plastic(UL94V-0)
- Contact:Phosphor Bronze
- Plating:Tin Plated

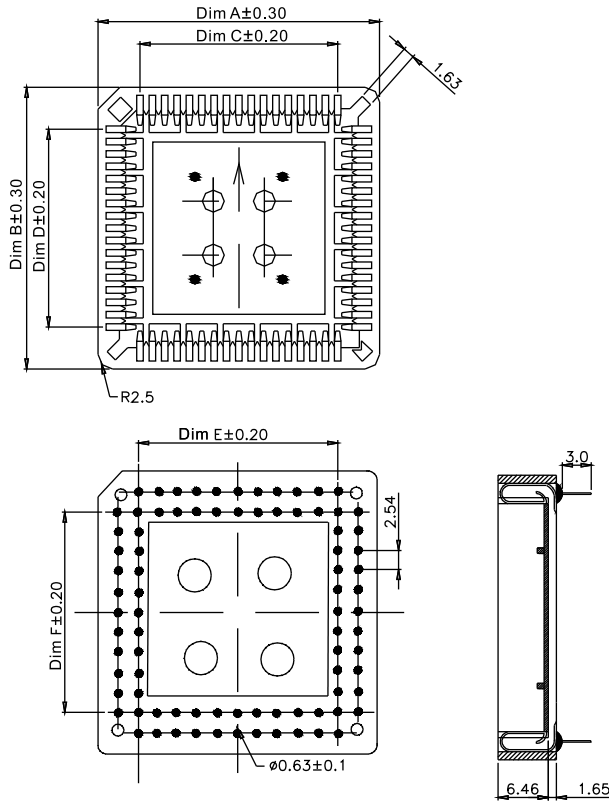

**Engineering Dimension**

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
20	15.50	15.50	5.08	5.08	5.08	5.08
28	18.04	18.04	7.62	7.62	7.62	7.62
32	18.04	20.54	7.62	10.16	7.62	10.16
44	23.48	23.48	12.70	12.70	12.70	12.70
52	25.88	25.88	15.24	15.24	15.24	15.24
68	31.66	31.66	20.32	20.32	20.32	20.32
84	36.66	36.66	25.40	25.40	25.40	25.40

**Recommended PCB Layout**

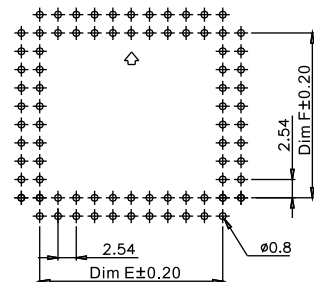

**Ordering Information**

6601—XX—XX  
①                    ②

① No. Of Contacts	② Material PBT: Insulator PBT PPS: Insulator PPS
-------------------	--