


Pixels Details
Scale=20/1


K1 Terminal	
No.	Pin Name
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS1
20	VOUT
21	BLA
22	BLK
23	BLA
24	NC
25	BLK

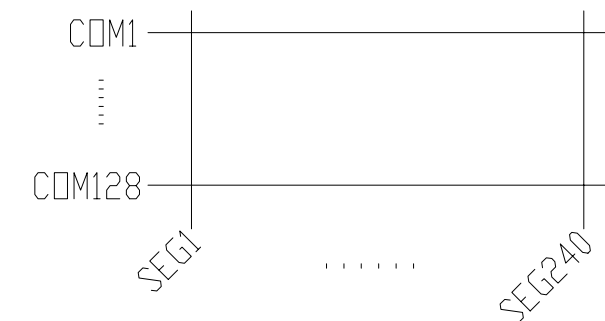

Wiring Details(Top View)
Scale=Free

Note:

- *1. Display Type : FSTN, Positive, Transflective
- *2. Duty : 1/128, Bias : 1/12
- *3. Backlight Color : White
- *4. Operating Voltage : 5.0V
- *5. Operating Temperature : -20°C~70°C
- *6. Storage Temperature : -30°C~80°C
- *7. Controller IC : T6963C
- *8. An external VR(25K to 50K) must be connected for Contrast Control

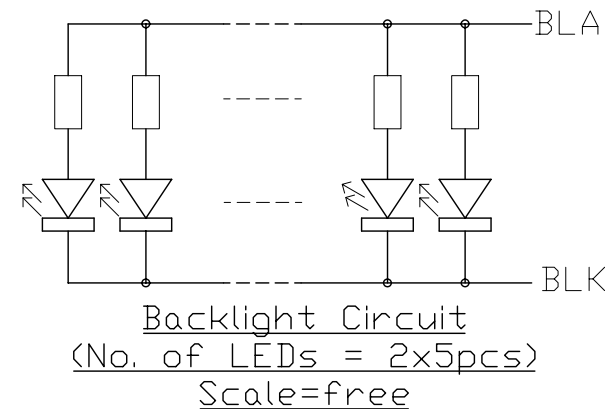

Backlight Circuit
(No. of LEDs = 2x5pcs)
Scale=free

C		
B		
A	-Refine Outline -Typing Correction	Li Shuai 2005-10-19
Rev	Note	Date
Dwg Title LM240128TCC Outline Dwg		
Dwg No.	MK-001048a-1-1	Date 2005-09-22
Scale	6/5	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Li Shuai

TOPWAY