

Specifications:


Current rating:3.0A AC,DC  
 Voltage rating:250V AC,DC  
 Contact resistance:30m ohm max.  
 Insulation resistance: 5,000M ohm min.  
 Withstanding voltage:1,000V AC/Minute  
 Operating Temperature range:-40°C ~ +85°C  
 Materials:

Housing :High Temp. Plastic (PBT UL94V-0)  
 Standard Color:Black

Contact Material:Copper Alloy (P/N:5503TS-XX)  
 Shell:Meatal Iron With Tin plated

How To Order

5503-XXS-XX-F1

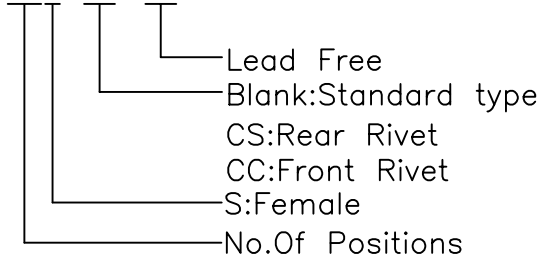

Pos	A	B	C	D	E
9	16.33	24.99	30.81	7.90	12.50
15	24.66	33.32	39.14	7.90	12.50
25	38.38	47.04	53.04	7.90	12.50
37	54.84	63.50	69.32	7.90	12.50
50	52.43	61.11	66.93	10.74	15.37

RoHS Compliant

REV	DATE	FILE	BY
A	04-Jul-2006	(PC0052)	Jerry Chen
B	15-Aug-2006	Change Drawing	Cel King

DRAWN: CEL KING
CHECKED: JEREMY LIU
APPROVAL: MIKE WU

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: MM
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:

<b>繼德工業股份有限公司</b> <b>Neltron Industrial Co., Ltd.</b>		DESCRIPTION: D-SUB Female Housing Crimp Type	SIZE
		PART NO: 5503-XXS-XX-F1	<b>A4</b>