

# CHW0640-N Crimp Terminal Housing

## 2.5mm Pitch Wire to Board

### FEATURES AND SPECIFICATIONS

#### Electrical


Voltage Rating : 250VAC max  
Current Rating : 3A max  
Contact Resistance : 30mΩ max  
Insulation Resistance : 1,000MΩ min  
Dielectric Withstanding Voltage : 1,000VAC for 60 seconds

#### Physical


Housing : Nylon66, UL94V Grade  
Operating Temperature : -40°C ~ +105°C

#### Reference Information

Mates With : LW0640-N, LA0640-N Series  
Packing : Bag  
Designed In : Millimeters

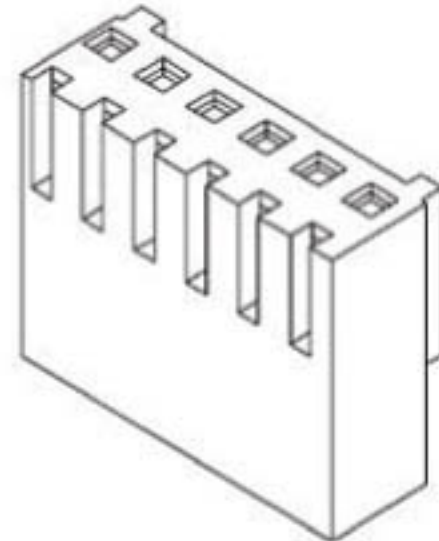

### DIMENSIONS (FOR REFERENCE ONLY)

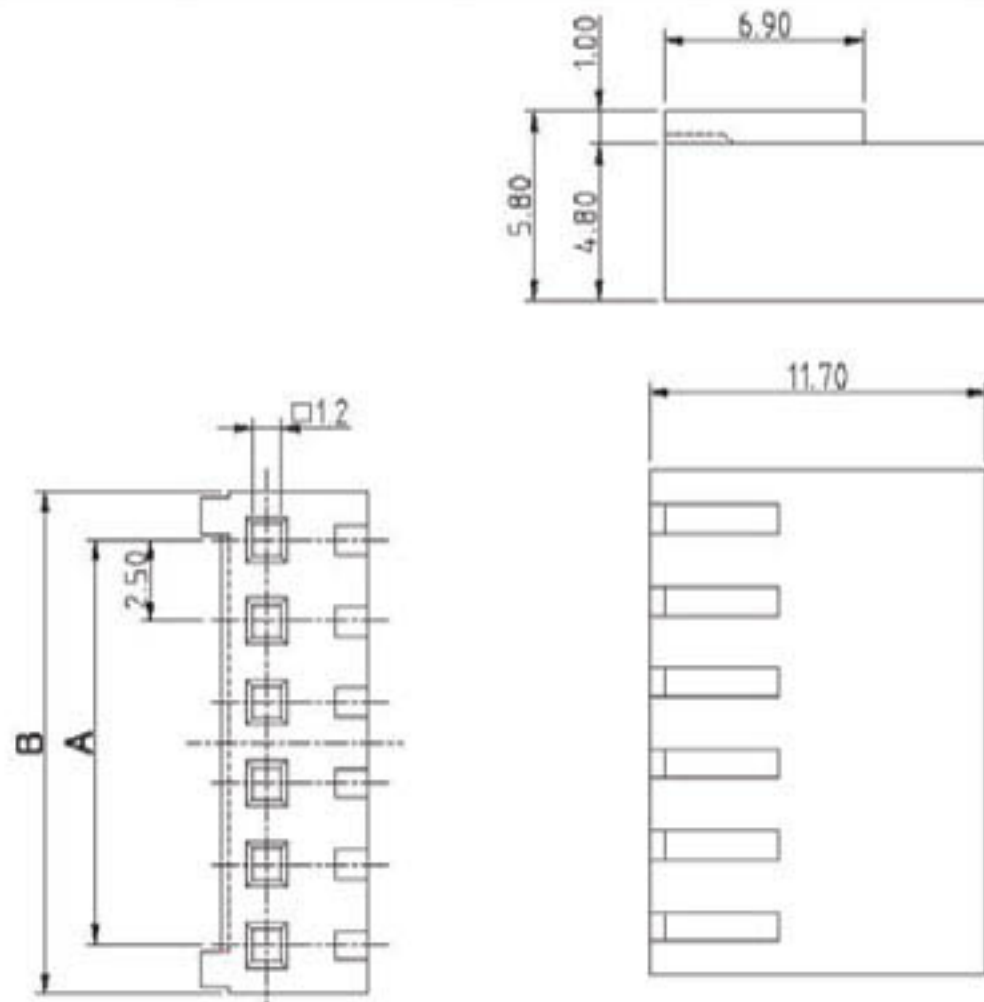

### ORDERING INFORMATION AND DIMENSIONS

CKT	MODEL NO.	A	B	CKT	MODEL NO.	A	B
2	CHW0640-02	2.5	5.5	9	CHW0640-09	20.0	23.0
3	CHW0640-03	5.0	8.0	10	CHW0640-10	22.5	25.5
4	CHW0640-04	7.5	10.5	11	CHW0640-11	25.0	28.0
5	CHW0640-05	10.0	13.0	12	CHW0640-12	27.5	30.5
6	CHW0640-06	12.5	15.5	13	CHW0640-13	30.0	33.0
7	CHW0640-07	15.5	18.0	14	CHW0640-14	32.5	35.5
8	CHW0640-08	17.5	20.5	15	CHW0640-15	35.0	38.0