기판용 D-SUB Connector 3열 Angle Type Male/Female

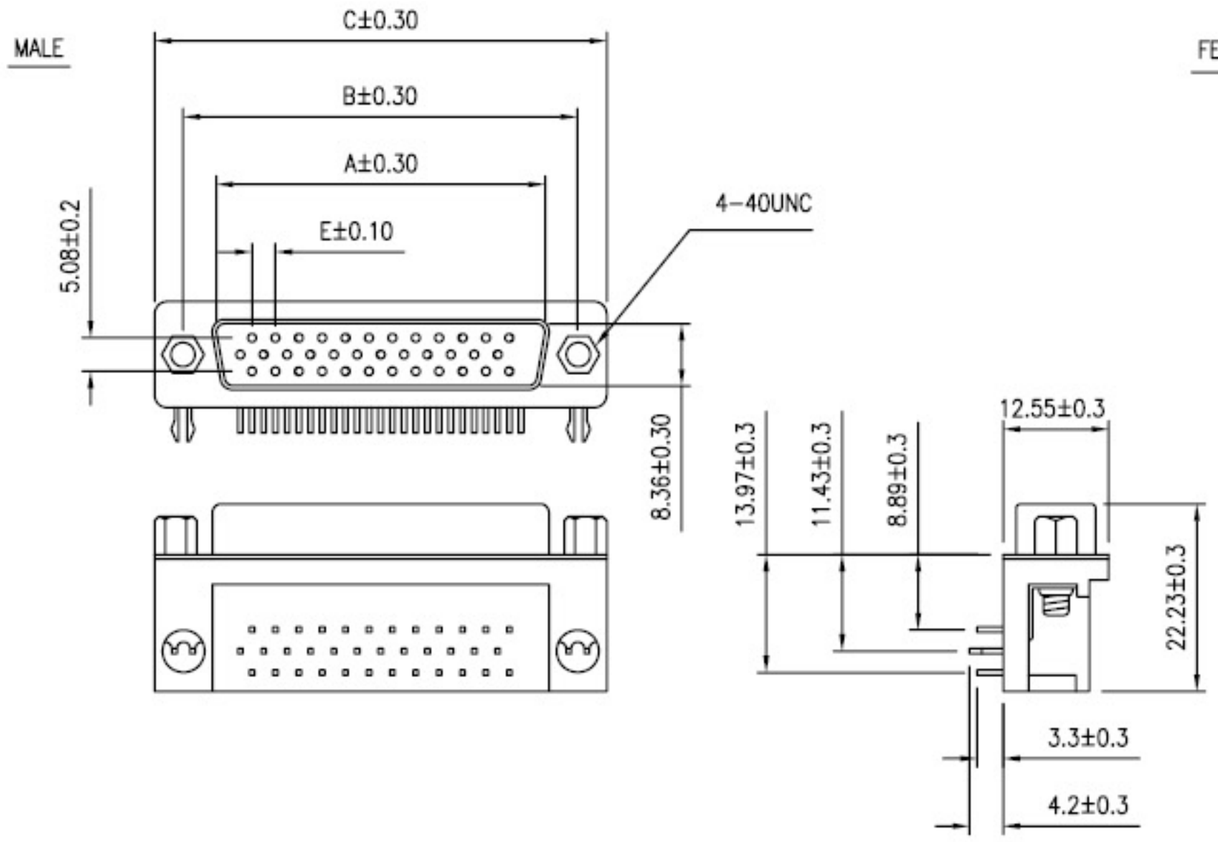

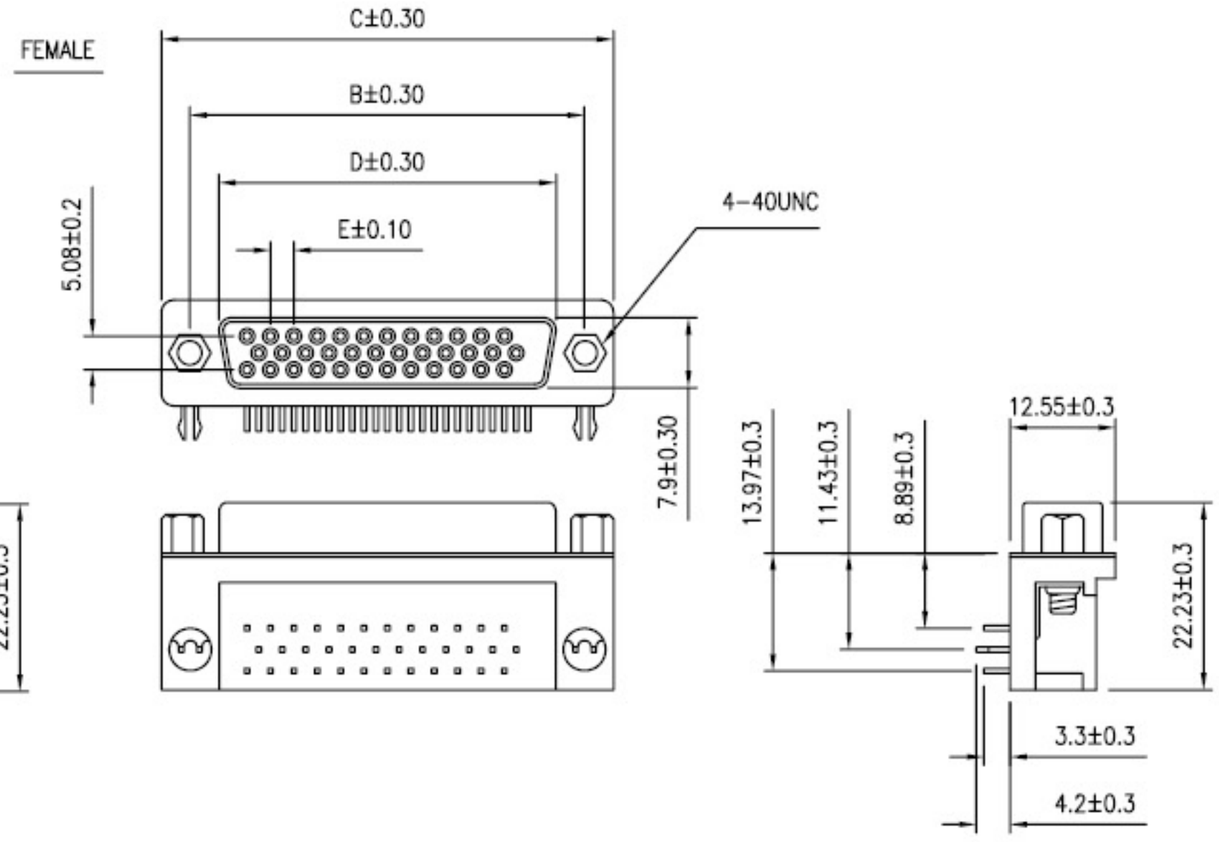

SPECIFICATION

* Current Rating: 3 A
* Withstanding Voltage: 1000 VAC (1 min.)
* Insulation Resistance: 1000 Megohms MIN.
* Contact Resistance: 30 Milliohms MAX.
* Operating Temperature: −40°C to +85°C

MATERIAL

* Contact: Brass , Selective Gold or All Gold
* Insulator: PBT & 30% G. F.
* Shell: Stell , Tin Plated

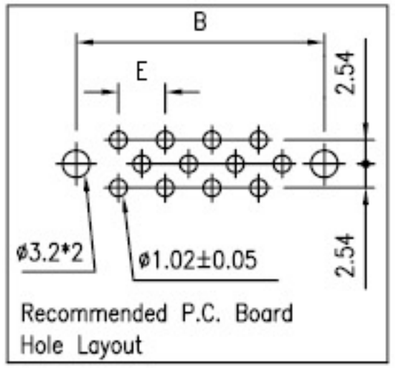

PART NO.	A	B	C	D	E
DS21-X-15-S1	16.92	24.99	30.81	16.33	2.29
DS21-X-26-S1	25.25	33.32	39.14	24.66	2.29
DS21-X-44-S1	38.96	47.04	53.04	38.38	2.29
DS21-X-62-S1	55.42	63.50	69.32	54.84	2.41

ELEPARTS CO.,LTD

0.0±	SCALE:	TITLE: D-SUB CONNECTOR H.D. Right Angle Type	PART NO:
0.00±	UNIT: MM		APP BY:
0.000±		MATL: PBT + 30% G.F.	CHK BY:
		DWG. NO. DS21	DR BY:

ELEPARTS
E-BUSINESS