

TPRH0705 TYPE


●FEATURE

1. Low core loss for high frequency power application
2. Large terminal surface


●Applications

1. Hard Disk drives, and other electronic equipment

●Shape and Dimension

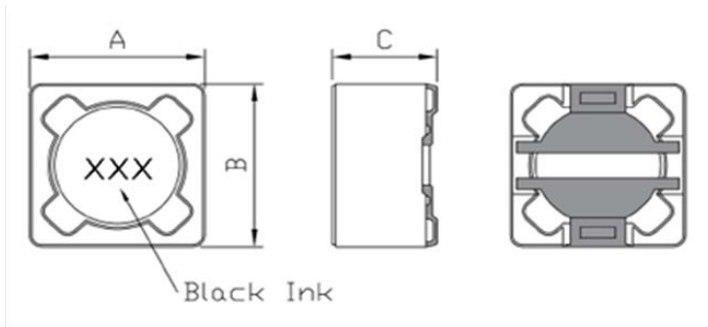

●Schematics and Land Patterns(mm)

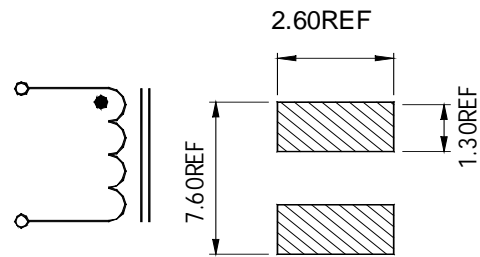

A=7.30±0.20m/m ; B=7.30±0.20m/m ; C=5.60m/m MAX

●Specification

Part Number	L(uH)	DCR(Ω Max)	Rated Current(A) (Max)
TPRH0705-1R0N	1.0±30%	0.0110	7.60
TPRH0705-2R2N	2.2±30%	0.0190	6.60
TPRH0705-3R3N	3.3±30%	0.0218	5.80
TPRH0705-4R7N	4.7±30%	0.0245	5.20
TPRH0705-6R8N	6.8±30%	0.0368	4.70
TPRH0705-100M	10±20%	0.0455	4.10
TPRH0705-150M	15±20%	0.0684	3.10
TPRH0705-220M	22±20%	0.0883	2.70
TPRH0705-330M	33±20%	0.1205	1.90
TPRH0705-470M	47±20%	0.1657	1.70
TPRH0705-680M	68±20%	0.2625	1.50
TPRH0705-101M	100±20%	0.3605	1.20
TPRH0705-151M	150±20%	0.5820	0.90
TPRH0705-221M	220±20%	0.7540	0.70
TPRH0705-331M	330±20%	1.1440	0.65
TPRH0705-471M	470±20%	1.8040	0.60
TPRH0705-102M	1000±20%	4.3000	0.30

Note1. Measurement frequency of Inductance value : 100KHz, 0.25V

Note2. Measurement ambient temperature of L, DCR and IDC : at 25°C

Note3. The rated current indicates the current when the inductance decreases to 70% over of it's nominal value or D.C. current when the temperature rising $\Delta t=40^{\circ}\text{C}$ lower, whichever is lower


Note4. Inductance tolerance: M: $\pm 20\%$, N: $\pm 30\%$

Note5. Packing: Taping ; Quantity: 900pcs/reel

GENERAL CHARACTERISTICS


1. Operating temperature range: -40 TO + 105°C(Includes temperature when the coil is heated)
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.

Terminal should not peel off. (refer to figure at right) 5. 0N 60 sec.

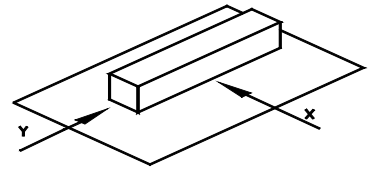

4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics: Inductance coefficient (0~2,000)x10-6/°C(-25~+80°C).
7. Humidity characteristics(Moisture Resistance): Inductance deviation within ±5%, after 96 hours in 90~95% relative humidity at 40 ±2°Cand 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within ±5%, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within ±5%, after being dropped once with 981m/s2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds(See attached recommend reflow)
11. Storage environment: Storage condition: Temperature Range: 10°C ~ 35°C (Generally: 21°C ~ 31°C) , Humidity Range: 50% ~ 80% RH (Generally: 65% ~ 75%) ; Transportation condition: Temperature Range: -35°C ~ 85°C , Humidity Range: 50% ~ 95% RH
12. Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
13. Reflow profile recommend:

Lead-free heat endurance test

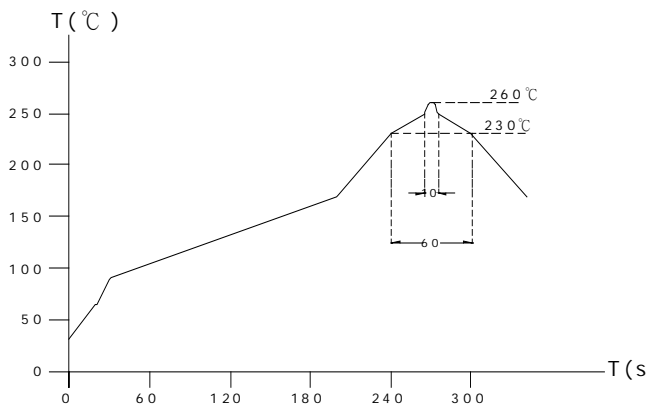

Lead-free the recommended reflow condition

