


NF 30

NF 30 Series AC/DC Converters

Total power **30 Watts**
Input voltages **AC100~264V or DC110~340V**
#of outputs **Single, Dual, Triple output**

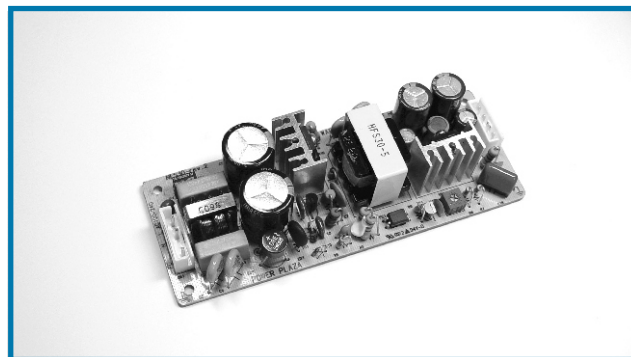

SPECIAL FEATURES

- Cost effective unit
- Small, compact footprint
- High efficiency
- Universal input
- Built - in EMI filter
- Inrush current limit
- Adjustable output voltage (Output1)
- Output over current protection
- Low output ripple & noise
- Isolated output
- 2 Years warranty

ENVIRONMENTAL

- Operating temperature range -10 ~60
- Storage temperature range -20 ~70
- Humidity 20%~90%RH
- Vibration 10~55Hz at 2G 3minutes period
- Impact 20G for 11ms, once on each X, Y and Z-axis
- Cooling method Natural air
- MTBF 1.8×10^5 hrs
- Safety CB standard design
- Noise Meets FCC class B

ELECTRICAL SPECIFICATIONS

INPUT	<ul style="list-style-type: none"> · Voltage AC100~264V (or DC 110~340V) · Current 0.65A max. @ 110VAC / 0.32A max. @ 220VAC · Frequency 47~440Hz max. (50~60Hz typ.) · Efficiency 72% min. · Inrush current (at cold start) 30A max. @ 110VAC / 60A max. @ 220VAC · Leakage current 0.5mA max. @ 110VAC / 0.75mA max. @ 220VAC
OUTPUT	<ul style="list-style-type: none"> · Voltage adj. Range $\pm 10\%$ typ. @ Output1 · Ripple and noise 1% max. · Line regulation $\pm 1\%$ max. @ Output1, 3 / $\pm 2\%$ max. @ Output2 · Load regulation $\pm 1\%$ max. @ Output1, 3 / $\pm 2\%$ max. @ Output2 · Dynamic load regulation $\pm 3\%$ max. @ Output1 · Temperature drift $\pm 1\%$ typ. · Rising time 100ms max. · Holding time 10ms min.
PROTECTION CIRCUIT	<ul style="list-style-type: none"> · Over current protection Work at over 105% of rating & recovers automatically
ELECTRICALLY ISOLATED	<ul style="list-style-type: none"> · Input - Output AC 3kV, 1minute, 10mA / DC 500V, 100MOhms min. · Input - FG AC 2kV, 1minute, 10mA / DC 500V, 100MOhms min. · Output - FG AC 0.5kV, 1minute, 10mA / DC 500V, 70MOhms min.

Ordering Information

Input	Output1	Output2	Output3	Maximum Power	Ripple&Noise max	Efficiency Typ.	Model Number	
AC 100 ~ 264V or DC 110 ~ 340V	5V@5.0A 12V@2.5A 15V@2.0A 24V@1.3A			25.0W	80mVp-p	75%	NFS30-5	
				30.0W	120mVp-p	80%	NFS30-12	
				30.0W	150mVp-p	84%	NFS30-15	
				31.2W	200mVp-p	83%	NFS30-24	
	5V@3.0A 5V@3.0A 5V@3.0A	+12V@1.0A +15V@0.8A +24V@0.5A			27.0W	80/120mVp-p	77%	NFD30-52
					27.0W	80/150mVp-p	77%	NFD30-5F
27.0W					80/200mVp-p	78%	NFD30-54	
5V@3.0A 5V@3.0A 5V@3.0A	+12V@0.7A +12V@0.7A +15V@0.6A	-12V@0.3A -5V@0.6A -15V@0.2A		27.0W	80/120/120mVp-p	74%	NFT30-522A	
				26.4W	80/120/100mVp-p	74%	NFT30-525A	
				27.0W	80/150/150mVp-p	77%	NFT30-5FFA	

Mating connectors


Output type	Name	I/O Connector	Mating Connector	Terminal
Single	CN 1	YPW500-03	YPH500-03	YLT-500
	CN 2	YW396-04	YH396-04	YLT-500
Dual	CN 1	YPW500-03	YPH500-03	YLT-500
	CN 2	YW396-06	YH396-06	YLT-500
Triple	CN 1	YPW500-03	YPH500-03	YLT-500
	CN 2	YW396-06	YH396-06	YLT-500

Pin assignments



Connector	Input
CN 1 (input)	1. FG 2. AC(N) 3. AC(L)

Connector	Single	Dual	Triple
CN 2 (input)	1. Output1 2. Output1 3. Gnd 4. Gnd	1. Output2 2. Gnd 3. Gnd 4. Gnd 5. Output1 6. Output1	1. Output1 2. Gnd 3. Output2 4. Gnd 5. Gnd 6. Output3

Dimensions

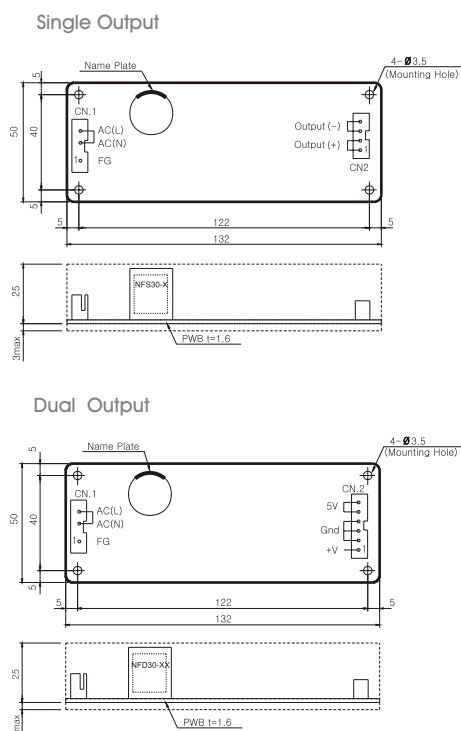

Derating curve

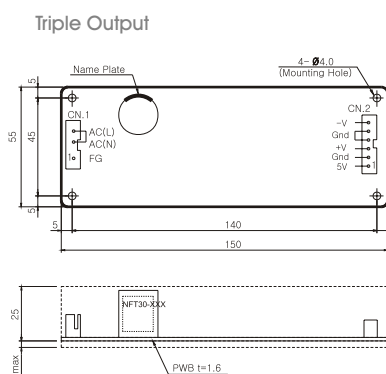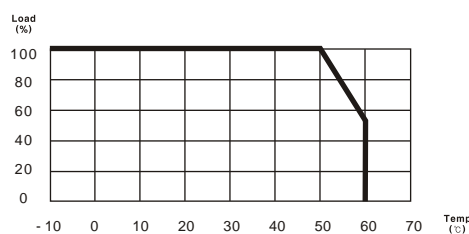

NOTES

- All dimensions are in mm
- Weight : 130g or less (single, dual output)
160g or less (triple output)