
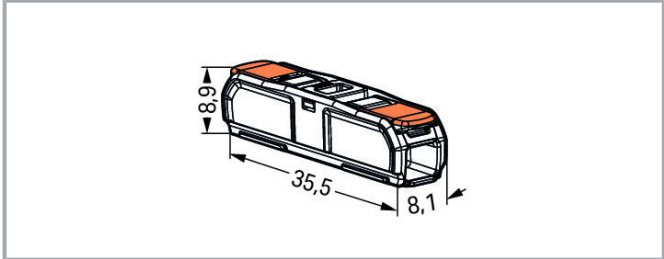


| : 221-2411

Inline splicing connector with lever; for all conductor types; max. 4 mm²; 2-conductor; transparent housing; Transparent cover; Surrounding air temperature: max 85°C (T85)

www.wago.com/221-2411



!

WAGO Korea Co., Ltd.
Room A413~A416, A dong
Indukwon IT Valley Building, Imiro 40
Poil-dong, Uiwang-Si, Gyeonggi-do, South Korea
+82 314219500 | Email: info.korea@wago.com

?
. +82(0)31 421 9500 .



This connector is suitable for worldwide installations.

Electrical data

Ratings per IEC/EN

Ratings per	EN 60664
Rated voltage (II / 2)	450 V
Rated impulse voltage (II / 2)	4 kV
Rated current	32 A
Legend (ratings)	(II / 2) ≙ II / 2

Approvals per UL

Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	20 A

Connection data

Total number of connection points	2
-----------------------------------	---

!

WAGO Korea Co., Ltd.
Room A413~A416, A dong
Indukwon IT Valley Building, Imiro 40
Poil-dong, Uiwang-Si, Gyeonggi-do, South Korea
+82 314219500 | Email: info.korea@wago.com

?
. +82(0)31 421 9500 .

Connection 1

Connection technology	CAGE CLAMP®
Actuation type	
Connectable conductor materials	
Solid conductor	0.2 ... 4 mm ² / 20 ... 14 AWG
Stranded conductor	0.2 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor	0.2 ... 4 mm ² / 18 ... 14 AWG
Strip length	11 mm / 0.43 inch

Geometrical Data

Width	8.1 mm / 0.319 inch
Height	8.9 mm / 0.35 inch
Depth	35.5 mm / 1.398 inch

Material Data

Note on material data	Information on material data can be found here
Color	
Cover color	transparent
Flammability class per UL94	V2
Actuating element color	
Weight of insulation material	0.84 g
Weight	2.4 g


Commercial data

Pack. unit	600 (60) Pieces
Packaging type	box
Country of origin	DE
GTIN	4055144049404
Customs Tariff No.	85369010000


Installation Notes

Conductor termination

!

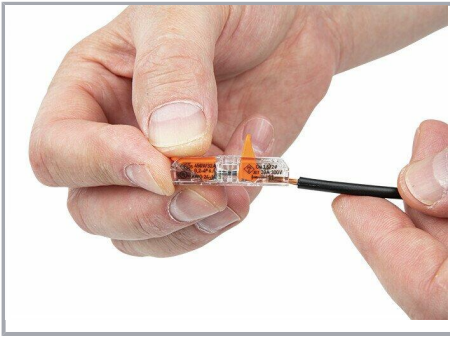

Push up the lever to open the clamping unit and insert the conductor.

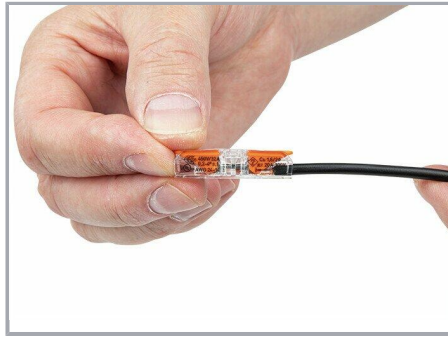


Push the lever back down.

Installation




Place the inline splicing connector on the carrier in front of the mounting position.

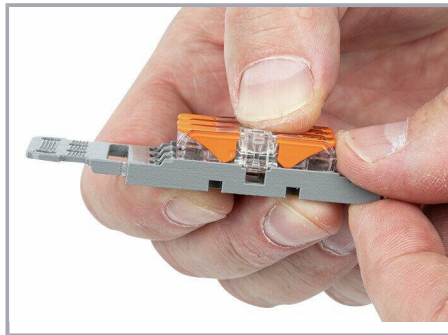


Push the connector to the center position until it snaps into place.


Application

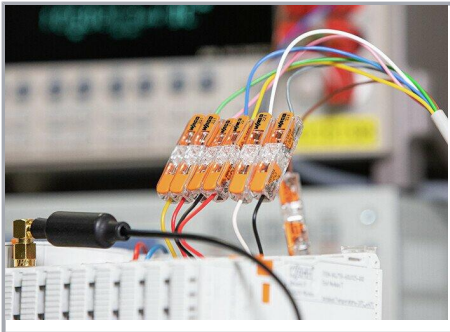

Perfect for test setups

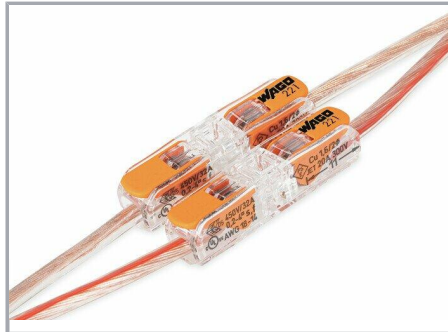

Simple extension of lines

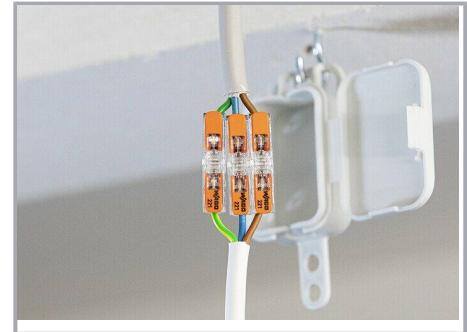

Lighting connection in suspended ceilings

!



Multi-pole, fixed lighting fixture wiring

!