


Normal Geometric Tolerancing				
—	//	≡	⊥	
0 to 100	0.3	0.4	0 to 10	0.3
over 100 to 150	0.4	0.4	over 10	0.4
over 150	0.6			

Normal dimension Tolerances		
0~10	±0.35	
over 10~30	±0.40	
over 30~53	±0.48	
over 53~70	±0.55	
over 70~90	±0.60	
over 90~115	±0.70	
over 115~150	±0.85	
over 150~200	±1.00	
over 200~250	±1.20	
over 250~320	±1.40	

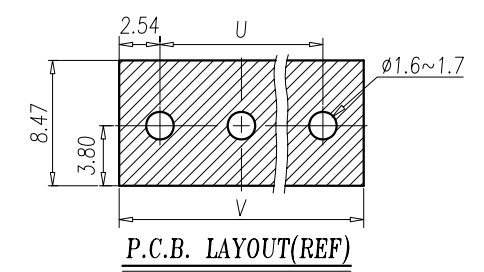

- NOTES: 1. Rating: 300V 12A
 PITCH: 5.08mm
 2. Insulation Withstands Voltage:
 AC 2000V at 1 minute
 3. Insulation Resistance:
 500MΩ or more at DC500V
 4. Using Temperature Range:
 -40°C~+105°C
 5. 表面處理為細噴沙
 6. RoHS Compliance

P	2	3	4	5	6	7	8	9	10	11	12	13
U	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
V	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
P	14	15	16	17	18	19	20	21	22	23	24	
U	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	
V	71.12	76.20	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92	

2	SOLDER PIN	COPPER ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	ZMJ	DATE	13.01.07	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	5:1 (:)		
APP.		DATE		NAME	TB39V-XXP		
REV.	CONTENT	CHK.	DATE	DINKLE ENTERPRISE CO., LTD	DWG NO.	SP-03-TB39V000	

△			
REV.	CONTENT	CHK.	DATE