

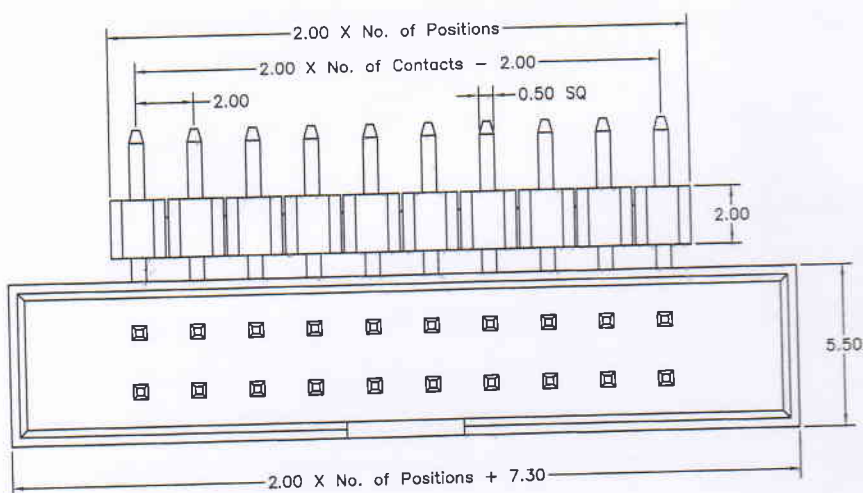




2.00mm BOX Header, Right Angle

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

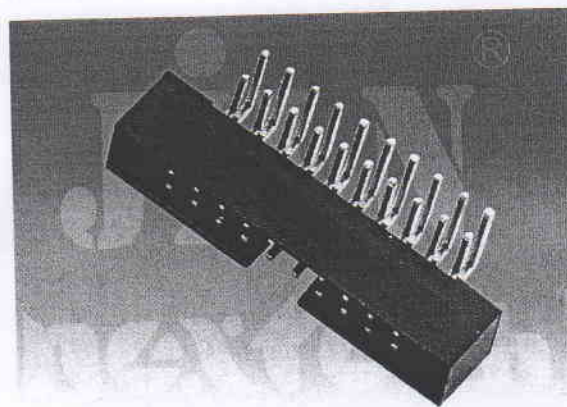

Type 1

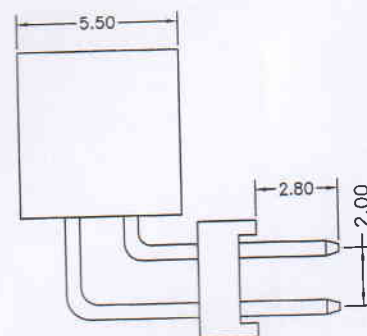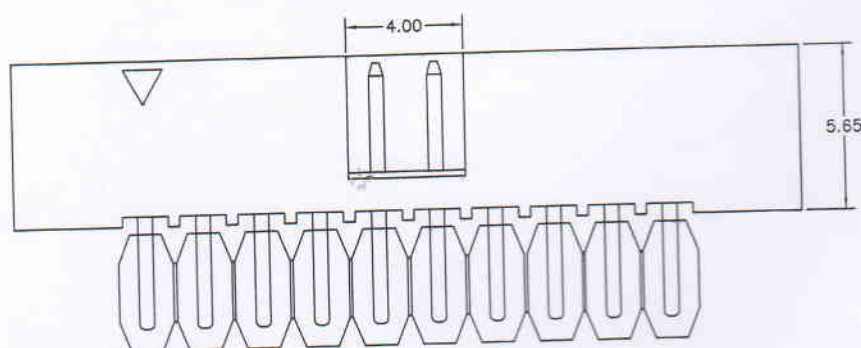

Type 2

Ordering Information

3211 2

XX

G0

X

R

B

K

01

No. of
Pins
Per Row
6~68

Contact Plating
 SN : Tin
 G0 : Gold Flash
 G2 : 5u" Gold
 G3 : 10u" Gold
 G4 : 15u" Gold
 G5 : 30u" Gold
 S0 : Gold Flash/Tin
 Standard: G0

Insulator
 Material
 Option

A BK-PBT
 B BK-PA66
 C BK-PA6T
 D BK-PA46
 F BK-LCP
 S Special

Connector Type
 R=Right Angle
 M=S.M.T

Color Type
 B=Black
 U=Blue
 W=White
 G=Grey