
| REV | ECN NO. | APP. | DATE |
|--------|------------|------|------|
| Α | NEW DESIGN | | |
| 9 20 | | | |
| 5 2 | | | |
| 0. 281 | | 7,8 | |

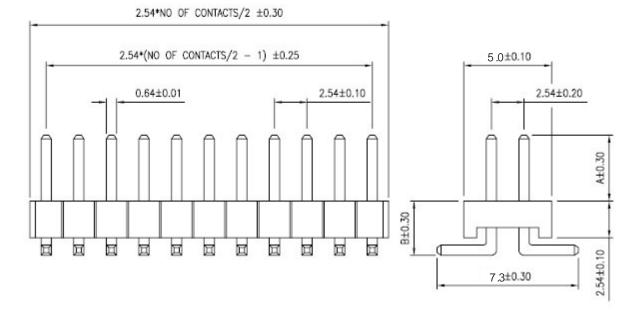

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 750g MIN.

MATERIAL

* Contact: Brass ,

0.64mm square post

- * Insulator: NYLON 66 & 30% G.F.
- * Plating: Gold

Number of Pin


* 80 P in

| D. | OI I |
|-----|-------|
| Pin | Chart |
| | Ondic |

| rin C | nart | | Base | H |
|-------|------|-------|------|---|
| Pin | Α | В | Pin | |
| 1 | 6.00 | 3 .50 | 1 | 2 |
| 2 | | | 2 | |
| 3 | | | 3 | |
| 4 | | | 4 | |



| 5000 | rioigiic |
|------|----------|
| Pin | Н |
| 1 | 2.54 |
| 2 | |
| 3 | |
| 4 | |
| 32. | |



| | | ELEPARTS Co.,Ltd | |
|-----------------|----------------------|--|----------|
| 0.0± | SCALE: | TITLE: | PART NO: |
| 0.00± 0.000± | UNIT: MM | 2.54X2.54MM (.100"*.100") PIN HEADER SMD Dual Row | APP BY: |
| ф. | | MATL: NYLON 66 + 30% GF | CHK BY: |
| \oplus | DWG. NO. PHO1 Series | DR BY: | |