



**P. C. B LAYOUT  
TOP VIEW**

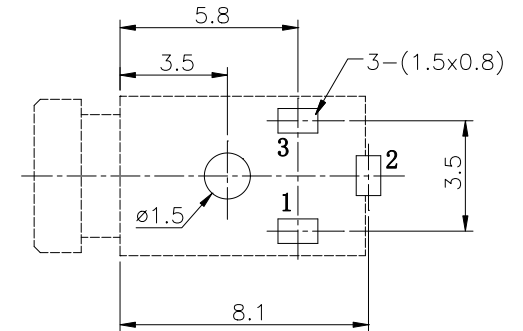

**SCHEMATIC**



**SPECIFICATION**

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 0.03\Omega$ ;
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PBT	
4	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

UNIT: MM	TYPE: PHONE JACK	MODEL NO: PJ-210A	PAPER NO: A4		PAGE 1 OF 1	
			TOLERANCE	ANGLES	SCALE	VER
			0.15	1.5	4:1	1

DESIGNER BY:		<b>旭日佳电子有限公司</b> □ BEST SUN ELECTRONIC CO., LTD
CHECK BY:		
APPROVED BY:		