


### SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: d0.03Ω;
3. Insulation resistance: e100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

### SCHMATIC

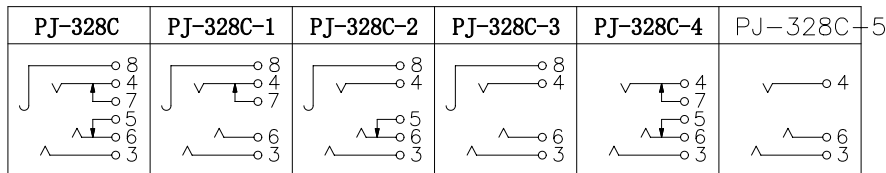

8	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
7	CURVE PIECE	1	BRASS	Ag-Plating
6	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
5	CURVE PIECE	1	BRASS	Ag-Plating
4	CONTACT FOOT	1	SUS301	Ag-Plating
3	CONTACT FOOT	1	SUS301	Ag-Plating
2	COVER	1	PA46	
1	HOUSING	1	PA46	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
		PHONE JACK	TOLERANCE	ANGLES
			0.15	数1.5
			SCALE	VER
			3:1	1

DESIGNER BY: \_\_\_\_\_  
 CHECK BY: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_