



**P. C. B LAYOUT
TOP VIEW**

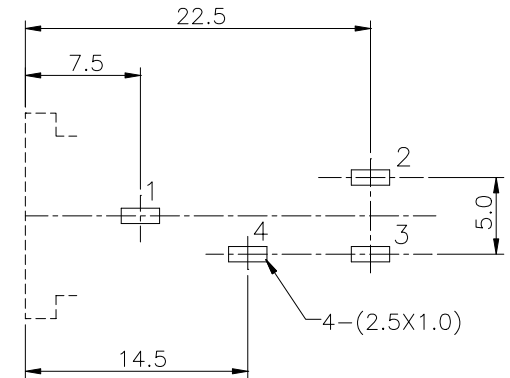

SCHEMATIC

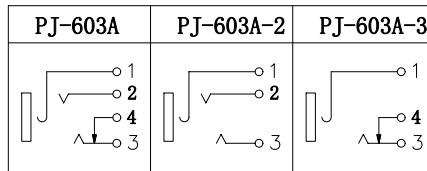

SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $d0.03\Omega$;
3. Insulation resistance: $e100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-30N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	AXIS SUPPORT	1	H59 BRASS	Au-Plating
6	COVER	1	PC	
5	HOUSING	1	PC	
4	CURVE PIECE	1	PHOSPHOR BRONZE	Sn-Plating
3	SPRING	1	PHOSPHOR BRONZE	Sn-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ-603A	TOLERANCE	ANGLES
			0.15	数1.5
			SCALE	VER
			2:1	1

DESIGNER BY:			旭日佳电子有限公司 □ BEST SUN ELECTRONIC CO., LTD
CHECK BY:			
APPROVED BY:			