


BSUN

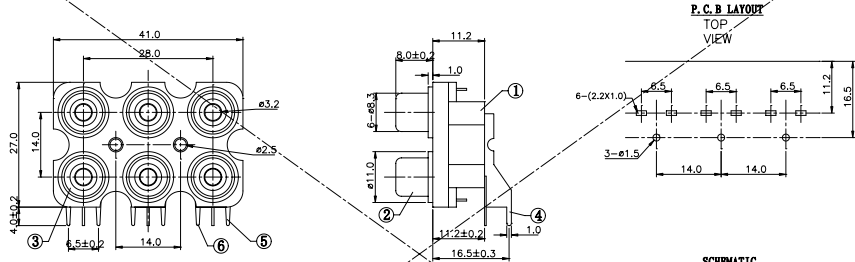


SPCIFICATION
 1. Rating : 50V 0.3A;
 2. Contact resistance: 40.03Ω;
 3. Insulation resistance: 5100MΩ (DC250V);
 4. Withstand voltage: 500VAC;
 5. Insertion and extraction force: 3-25N;
 6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	CONTACT FOOT	3	BRASS	Cu-Sn-Plating
5	CONTACT FOOT	3	BRASS	Cu-Sn-Plating
4	CONTACT FOOT	3	BRASS	Cu-Sn-Plating
3	AXIS SUPPORT	6	ABS	
2	AXIS SUPPORT	6	BRASS	Cu-Sn-Plating
1	HOUSING	1	ABS	

UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	RCA JACK	RCA-601	TOLERANCE ANGLES SCALE YER	
			0.15 0L1.5 4:3 1	
DESIGNER BY:			旭日佳电子有限公司	
CHECK BY:			BSST SUN ELECTRONIC CO.,LTD	
APPROVED BY:				

BSUN

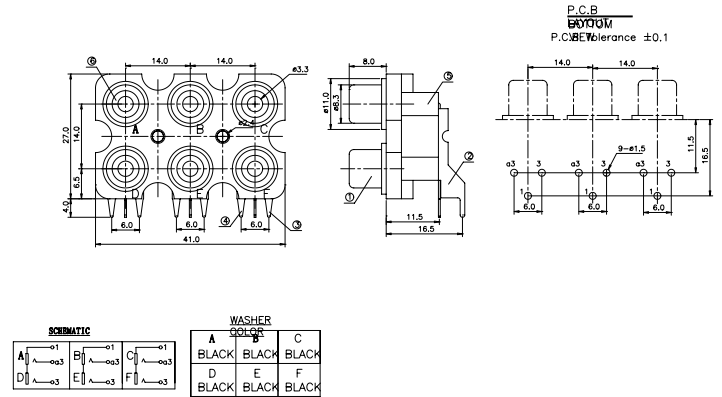

SPECIFICATION
 1. Rating ??DC 50V 0.3A??
 2. Contact resistance????0.05????
 3. Insulation resistance????100M??
 (DC250V)??
 4. Withstand voltage??500VAC ??
 5. Insertion and extraction force??3-30N;
 6. life test??150 cycles??

NO.	DESCRIPTION	QTY	MATERIAL	PLATING: 2u"
6	WASHER	6	ABS	COLOR
5	HOUSING	1	ABS	BLACK
4	TERMINAL-03	3	Brass	C/TIN PLATED
3	TERMINAL-3	3	Brass	C/TIN PLATED
2	TERMINAL-1	3	Brass	C/TIN PLATED
1	SHIELD	6	Brass	GOLD

UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	RCA JACK	RCA-601	TOLERANCE ANGLES SCALE YER	
			0.15 0L1.5 4:3 1	
DESIGNER BY:			旭日佳电子有限公司	
CHECK BY:			BSST SUN ELECTRONIC CO.,LTD	
APPROVED BY:				