




STP-1250



1. RATING : DC 12V, 50mA
2. TRAVEL : 0.25 ± 0.1 m/m
3. Contact Resistance : $100 \text{ m}\Omega$ Max.
4. BOUNCE : 10m SEC Max.
5. OPERATING FORCE : 180 ± 30 gf
6. Life : 50,000 Cycles

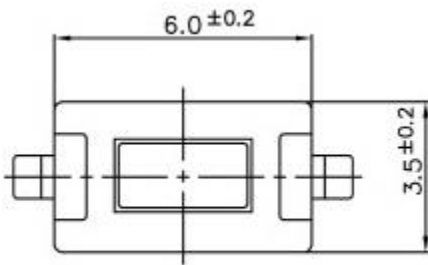

CIRCUIT DIAGRAM

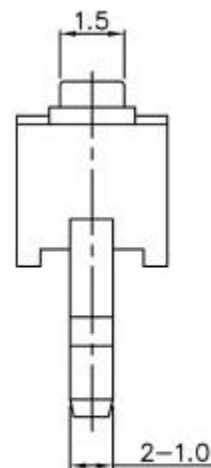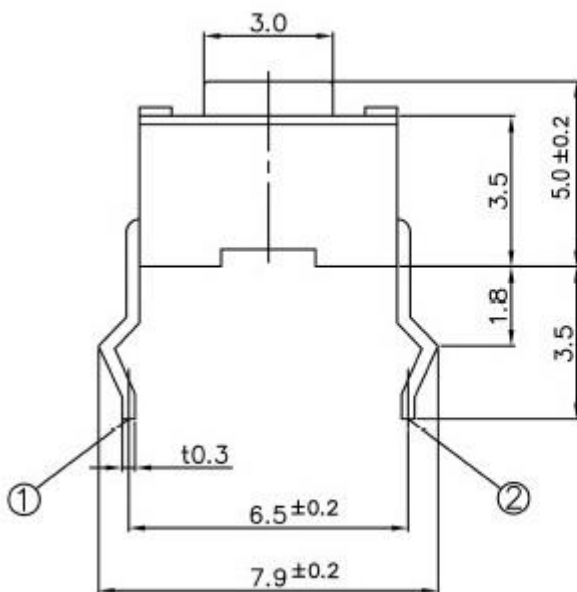

P.B.C MOUNTING HOLES

