


Specifications:  
 Current rating:3.0A AC,DC  
 Voltage rating:250V AC,DC  
 Contact resistance:30m ohm max.  
 Insulation resistance: 5,000M ohm min.  
 Withstanding voltage:1,000V AC For one Minute  
 Operating Temperature range:-40°C ~ +85°C  
 Materials:

Insulator:High Temp. Plastic (UL94V-0)  
 Contact:Copper alloy Nickel Undercoated,  
 Selective Gold Plated  
 Shell:Meatal Iron With Tin plated


How To Or  
 5508-XXP-XX-XX-XX-F1

- Blank:Black (Standard)
- WH:White ;BU:Blue
- Blank:Standard type
- CS:Rear Rivet
- CC:Front Rivet
- O1:Full Gold Plated
- O2:Selective Gold Plated
- P:Male
- No.Of Positions


78 Position

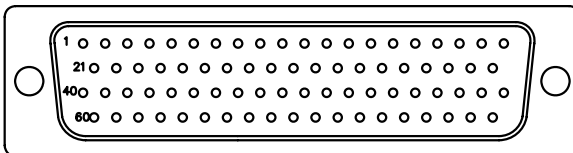

CC Type  
(Not Thru Hole)



CS Type  
(Thru Hole)



Pos	A	B	C	D	E	F
15	16.92	24.99	30.81	2.29	8.36	12.55
26	25.25	33.32	39.14	2.29	8.36	12.55
44	38.96	47.04	53.04	2.29	8.36	12.55
62	55.42	63.50	69.32	2.41	8.36	12.55
78	52.86	61.10	67.10	2.41	11.11	15.40

RoHS Compliant

E				DRAWN: Cel king	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	<b>繼德工業股份有限公司</b> <b>Neltron Industrial Co., Ltd.</b>	DESCRIPTION: D-SUB High Density Solder Male Type	SIZE <b>A4</b>
D			CHECKED: Jeremy Liu					
C				APPROVAL: Mike Wu	SCALE:	PART NO: 5508-XXP-XX-XX-XX-F1		
B			APPROVAL: Mike Wu		SHEET: 1 / 1			
A	23-Dec-2005	(PC0052)	Cel king		PROJECTION:			
REV	DATE	FILE	BY					