

SPECIFICATIONS

CUSTOMER	:	CKR001
SAMPLE CODE	:	SC2004LRS-DMA-BC1Q
MASS PRODUCTION CODE	:	PC2004LRS-DMA-BC1Q
SAMPLE VERSION	:	01
SPECIFICATIONS EDITION	:	004
DRAWING NO. (Ver.)	:	JLMD-PC2004LRS-DMA-BC1Q_002
PACKAGING NO. (Ver.)	:	JPKG-PC2004LRS-DMA-BC1Q_001

Customer Approved

Date:

Approved	Checked	Designer
閔偉 Ryan Yan	劉進	WUZHIJUN

- Preliminary specification for design input
- Specification for sample approval

POWER TIP TECH. CORP.

Headquarters: No.8, 6 th Road, Taichung Industrial Park, Taichung, Taiwan 台中市 407 工業區六路 8 號	TEL: 886-4-2355-8168 FAX: 886-4-2355-8166	E-mail: sales@powertip.com.tw Http://www.powertip.com.tw
---------------------------------------------------------------------------------------------------------------------	----------------------------------------------	--------------------------------------------------------------------------------------------------------

Contents

1. SPECIFICATIONS

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**
- 1.4 DC Electrical Characteristics**
- 1.5 Optical Characteristics**
- 1.6 Backlight Characteristics**

2. MODULE STRUCTURE

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Timing Characteristics**
- 2.4 Character Pattern**

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart**
- 3.2 Inspection Specification**

4. RELIABILITY TEST

- 4.1 Reliability Test Condition**

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety**
- 5.2 Handling**
- 5.3 Storage**
- 5.4 Terms of Warranty**

- Appendix:**
- 1. LCM Drawing**
 - 2. Packing Specification**

1. SPECIFICATIONS

1.1 Features

Item	Standard Value
Display Type	20*4 Characters
LCD Type	STN ,Positive , Transflective ,Extended Temp.
Driver Condition	LCD Module : 1/33Duty ,1/6.7Bias
Viewing Direction	6 O'clock
Backlight	Y/G LED
Weight	19.3g
Interface	4bit parallel interface
Other(controller / driver IC)	RW1067
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer web side : http://www.powertip.com.tw/news/LatestNews.asp

1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	65.0 (L) * 28.4 (W) *8.2(H)MAX	mm
Viewing Area	46.0(L) * 18.4 (W)	mm
Active Area	42.7 (L) * 15.9(W)	mm
Characters Size	0.33 (L) * 0.35 (W)	mm
Characters Pitch	0.38 (L) * 0.40 (W)	mm

Note : For detailed information please refer to LCM drawing

1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply Voltage	V _{DD}	—	-0.3	5.5	V
LCD Driver Supply Voltage	V _{LCD}	—	V _{SS} -0.3	V _{SS} +7.0	V
Input Voltage	V _{IN}	—	-0.3	V _{CC} +0.3	V
Operating Temperature	T _{OP}	—	-20	70	°C
Storage Temperature	T _{ST}	—	-30	80	°C
Storage Humidity	H _D	Ta < 60 °C	-	90	%RH

1.4 DC Electrical Characteristics

$V_{DD} = 5.0V \pm 0.5V$, $V_{SS} = 0V$, $T_a = 25^\circ C$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Logic Supply Voltage	V_{DD}	-	4.5	5.0	5.5	V
“H” Input Voltage	V_{IH}	-	$V_{DD}-1$	-	V_{DD}	V
“L” Input Voltage	V_{IL}	-	-	-	1	V
“H” Output Voltage	V_{OH}	$I_{OH} = -0.1mA$	3.9	-	V_{DD}	V
“L” Output Voltage	V_{OL}	$I_{OL} = 0.1mA$	-	-	0.4	V
Supply Current	I_{DD}	$V_{DD} = 5.0V$; $V_{OP} = 6.22V$; Pattern= Full display	-	2.19	--	mA
		$V_{DD} = 5.0V$; $V_{OP} = 6.22$; Pattern= Horizontal line*1	-	2.30	3.5	
LCM Driver Voltage	V_{OP} *2	$-20^\circ C$	-	-	-	V
		$25^\circ C$	6.02	6.22	6.42	
		$70^\circ C$	-	-	-	

NOTE: *1 The Maximum current display.

*2 The VOP test point is $V_o - V_{ss}$.

1.5 Optical Characteristics

LCD Panel : 1/32Duty , 1/6.7Bias , $V_{LCD}=6.3V$, $T_a=25^{\circ}C$

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Reference
Response Time	Rise	tr	$C \geq 2.0$, $\varnothing = 270^{\circ}$	-	89	134	Ms	Note2
	Fall	tf		-	204	306		
● Viewing angle range	Top	$\Theta Y+$		-	45	-	Deg.	Notes 1
	Bottom	$\Theta Y-$		-	35	-		
	Left	$\Theta X-$	-	35	-			
	Right	$\Theta X+$	-	35	-			
Contrast Ratio*2		C	$\theta = 0^{\circ}$, $\varnothing = 270^{\circ}$	-	6	-		Note 4
Average Brightness (with LCD) *2		IV	IF=40mA	-	10.80	-	cd/m ²	
Uniformity *1		ΔB		70	-	-	%	

Note 4 :

1 : $\Delta B = B(\min) / B(\max) * 100\%$



2 : Measurement Condition for Optical Characteristics:

a : Environment: $25^{\circ}C \pm 5^{\circ}C$ / $60 \pm 20\%R.H$, no wind , dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: 500 ± 50 mm , ($\theta = 0^{\circ}$)

c : Equipment: TOPCON BM-7 fast , (field 1 $^{\circ}$) , after 10 minutes operation.


d : The uncertainty of the C.I.E coordinate measurement ± 0.01 , Average Brightness $\pm 4\%$

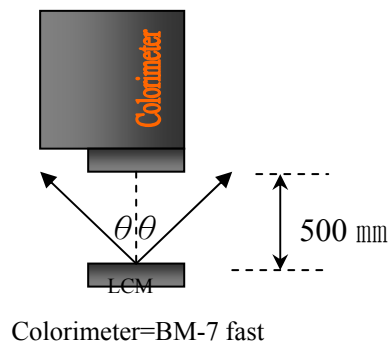

Note 1.

Optical characteristics-2

Viewing angle

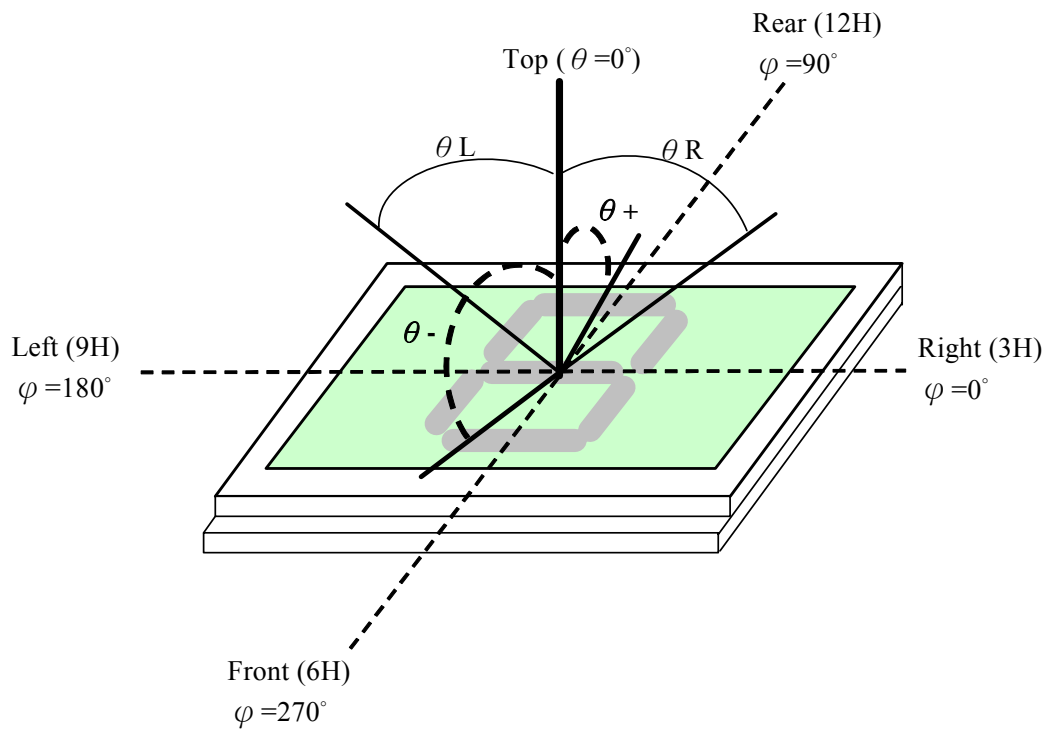


Viewing angle

Note 2.

Optical characteristics-3

Fig.2 Definition of response time

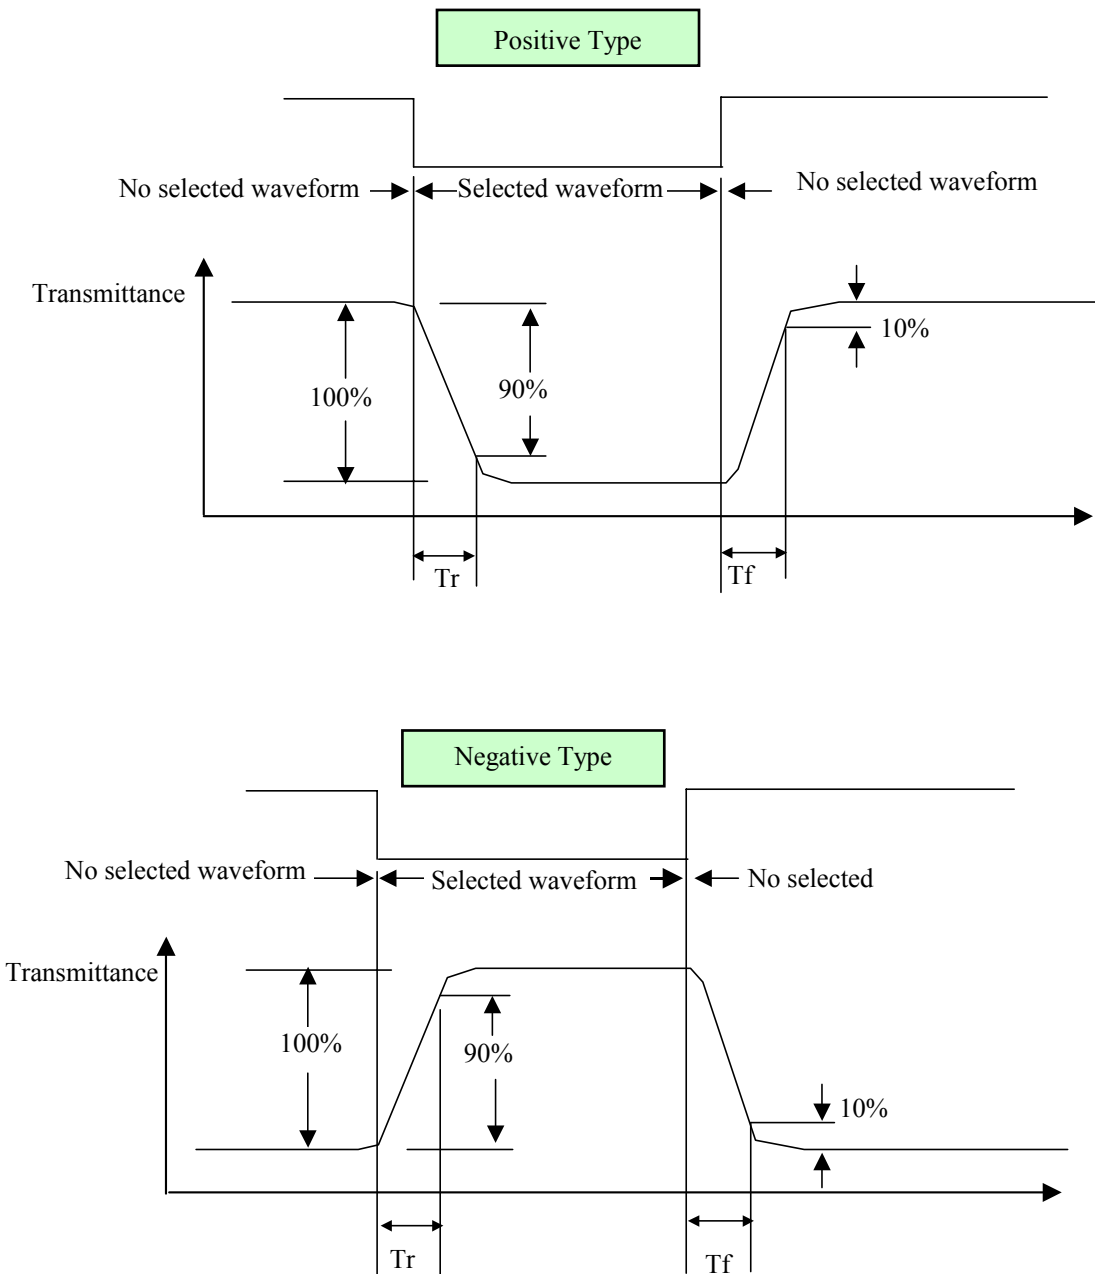

Electrical characteristics-2

※2 Drive waveform

V_{op} : Drive voltage


f_F : Frame frequency

$1/B$: Bias


f_D : Drive frequency

N : Duty

(1) Selected waveform

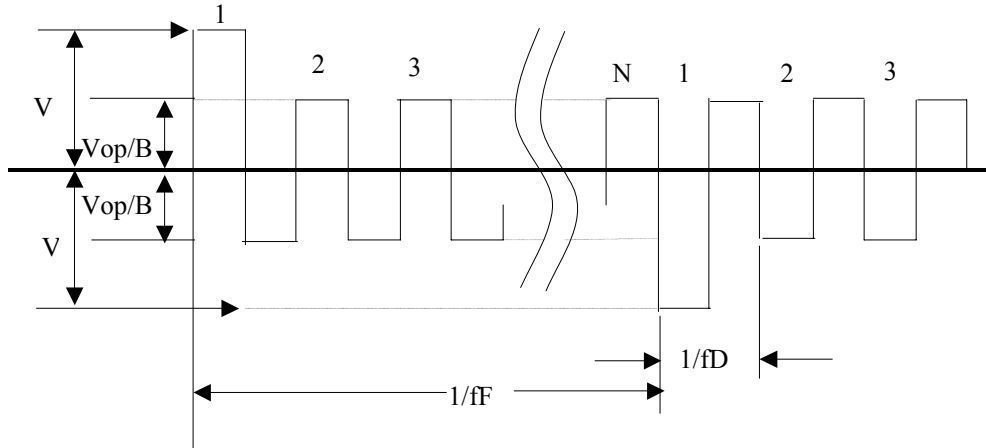


(2) Non- Selected wave form

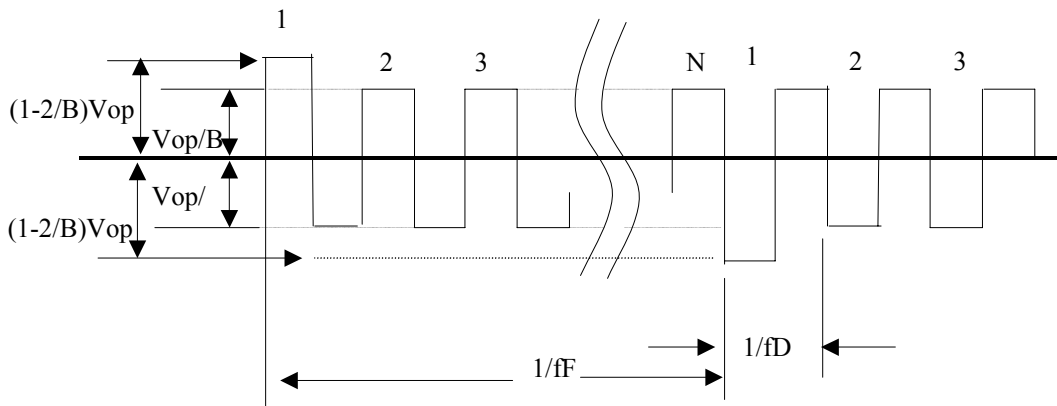

Note:

Frame frequency is defined as follows: Common side supply voltage peak - to - peak / 2 = 1 period


Note 3. : Definition of Vth

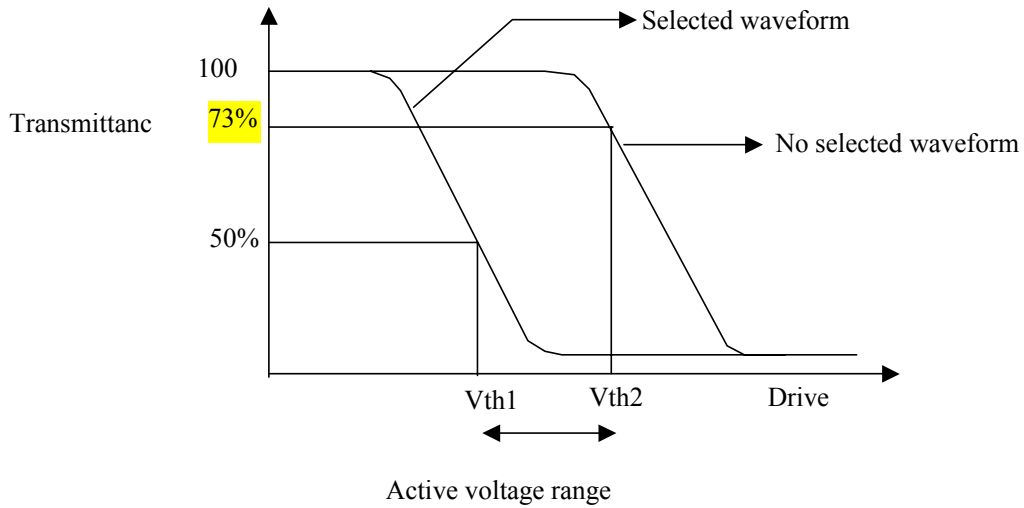

	Vth1	Vth2
View direction	10°	40°
Drive waveform	(Selected waveform)	(No selected waveform)
Transmittance	50%	73%

※1 Contrast ratio
 = (Brightness in OFF state) / (Brightness in ON state)

Outline of Electro-Optical Characteristics Measuring System

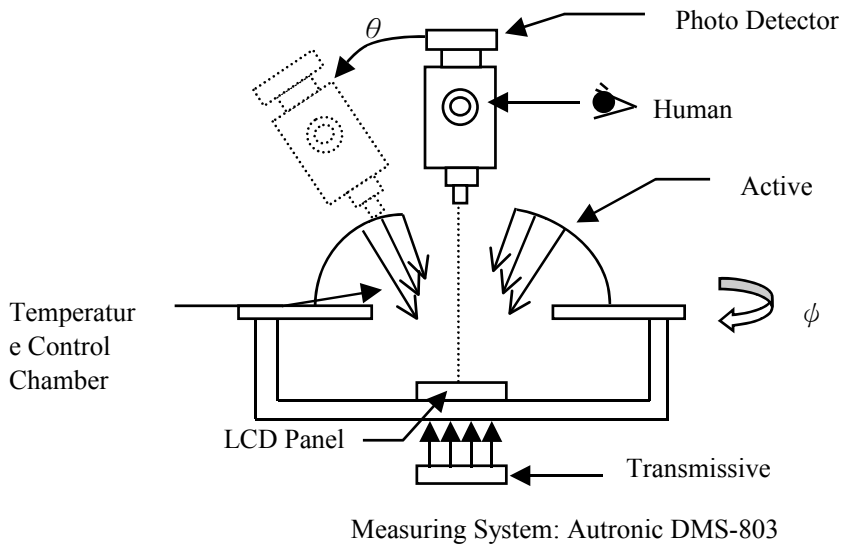

1.6 Backlight Characteristics

LCD Module with LED Backlight

Maximum Ratings

Item	Symbol	Conditions	Min.	Max.	Unit
Forward Current	IF	Ta =25°C	-	100	mA
Reverse Voltage	VR	Ta =25°C	-	10	V
Reverse Current	IR	VR=10V	-	40	uA
Power Dissipation	PO	Ta =25°C	-	0.46	W

Electrical / Optical Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF= 40mA	-	4.2	4.6	V
Average Brightness (without LCD)	IV		-	6	-	cd/m ²
Color	Yellow-green					


2. MODULE STRUCTURE

2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

* See Appendix

2.1.2 Block Diagram

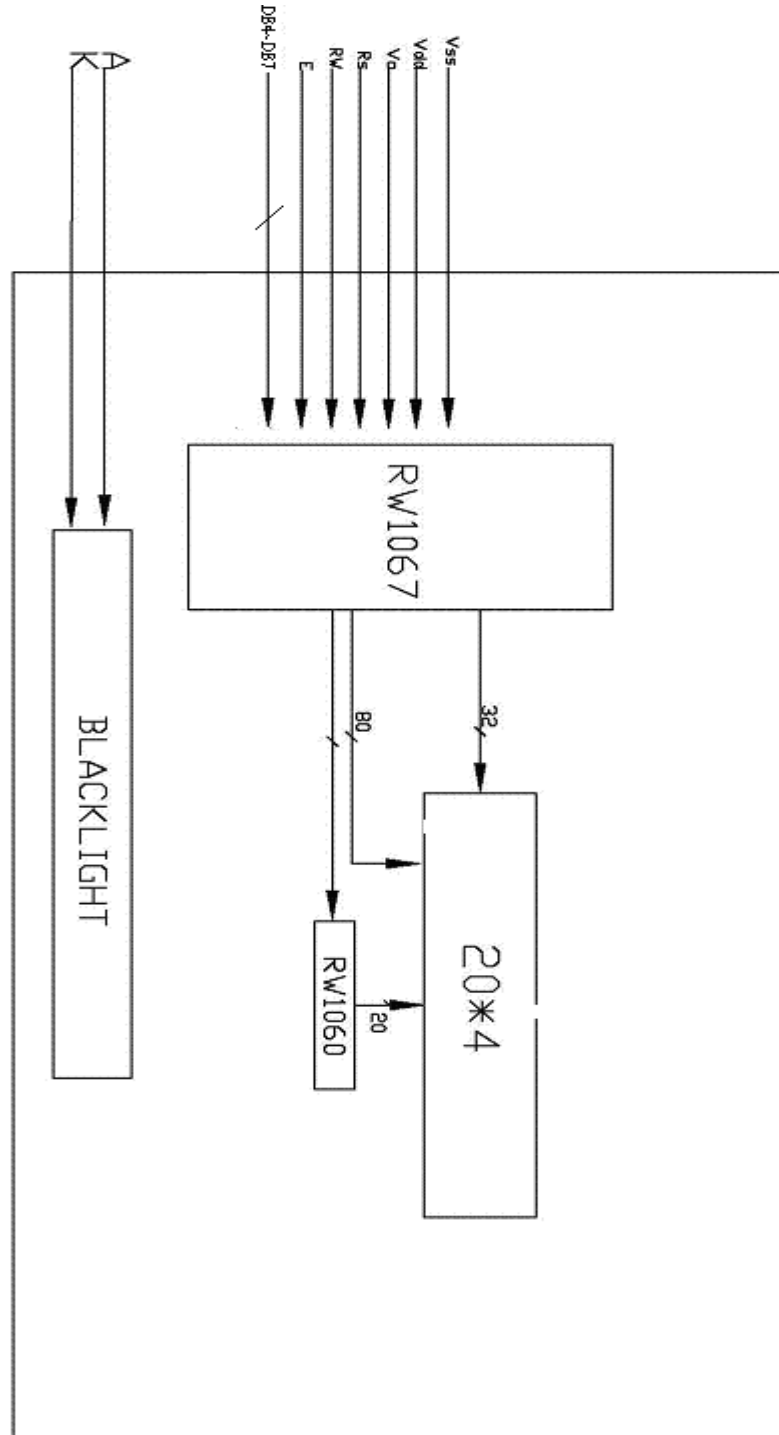


2.2 Interface Pin Description

Pin No.	Symbol	Function
1	V _{ss}	Power Supply (V _{ss} =0)
2	V _{dd}	Power Supply (V _{dd} >V _{ss})
3	Vo (NC)	Open this Pin. Test pin. VOP=Vo-V _{ss} .
4	RS	Register Selection input High=Data register Low=Instruction register(for write)
5	R/W	Read/write signal input is used to select the read/write mode High=Read mode, Low=Write mode
6	E	Start enable signal to read or write the data
7~10	NC	Open these Pins.
11	DB4	In case of 4-bit bus mode, used as both high and low order.
12	DB5	In case of 4-bit bus mode, used as both high and low order.
13	DB6	In case of 4-bit bus mode, used as both high and low order.
14	DB7	In case of 4-bit bus mode, used as both high and low Order. DB7 used for Busy Flag out put.
15	A	Power supply for LED BL (+)
16	K	Power supply for LED BL (-)


2.3 Timing Characteristics

■ Timing Characteristics

● Writing data from MPU to RW1067(parallel)

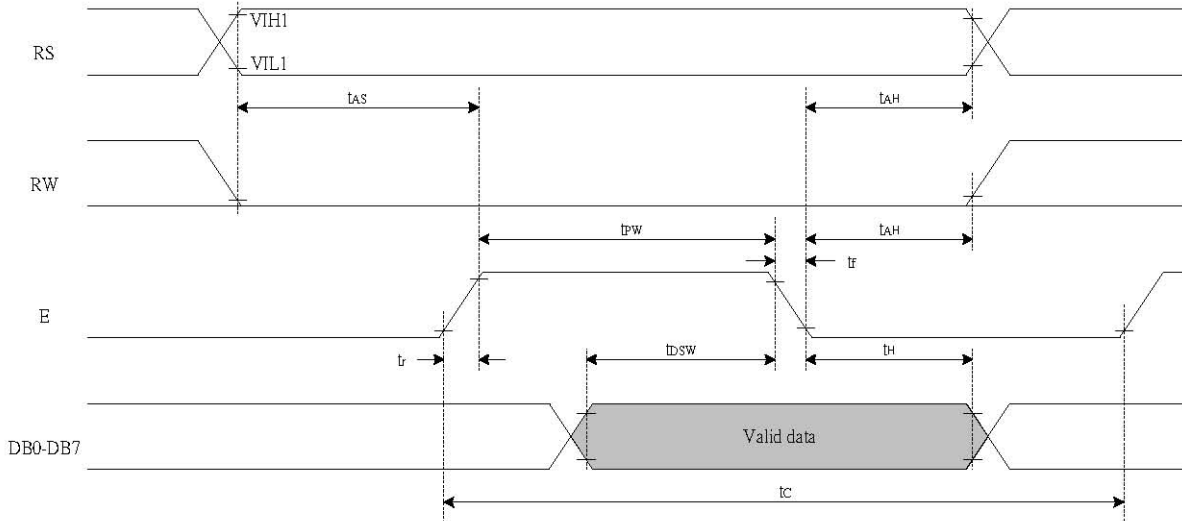

● Reading data from RW1067 to MPU(parallel)

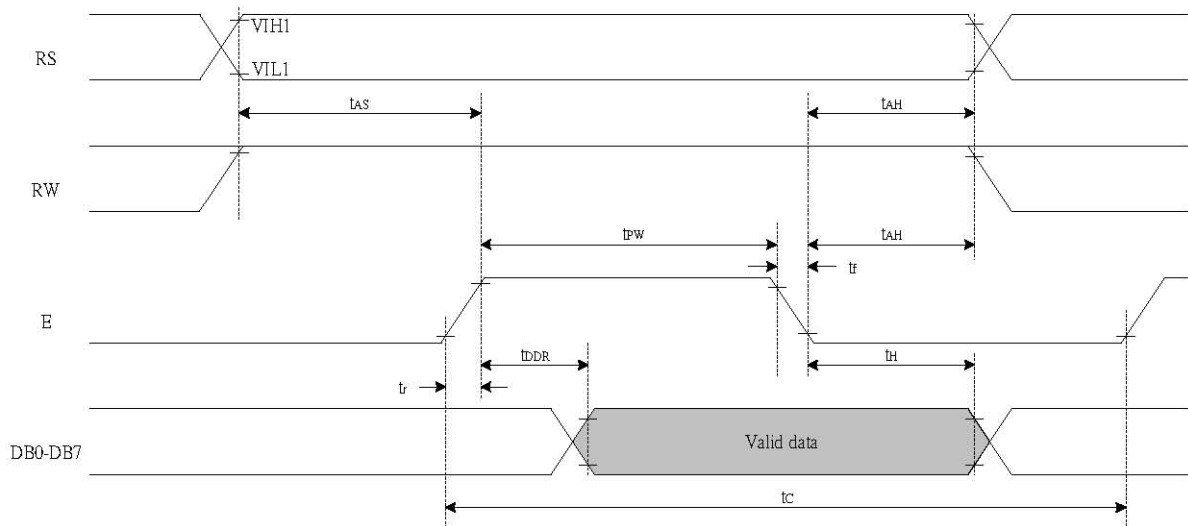

2.4 Character Pattern

Code Bank0 (0D-004)

b7~4 b3~0	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	CE RAM [00]			0	a	P	\	F				-	3	3	o	P
0001	CE RAM [01]		!	1	A	a	a				.	7	7	G	a	9
0010	CE RAM [02]		"	2	B	b	b				"	4	4	x	P	o
0011	CE RAM [03]		#	3	C	c	c]	5	5	e	e	o
0100	CE RAM [04]		*	4	D	d	d				√	6	6	H	o	
0101	CE RAM [05]		%	5	E	e	e				.	7	7	1	o	o
0110	CE RAM [06]		&	6	F	f	f				9	9	2	o	P	z
0111	CE RAM [07]		'	7	G	g	g				7	7	3	9	g	π
1000	CE RAM [00]		(8	H	h	h				4	9	4	U	π	π
1001	CE RAM [01])	9	I	i	i				e	7	U	U	U	U
1010	CE RAM [02]		*	#	J	j	j				z	o	n	v	j	π
1011	CE RAM [03]		+	#	K	k	k				*	9	o	o	π	π
1100	CE RAM [04]		.	<	L	l	l				o	9	o	o	o	π
1101	CE RAM [05]		-	=	N	n	n				z	z	z	z	z	z
1110	CE RAM [06]		.	>	N	n	n				a	o	o	o	o	π
1111	CE RAM [07]		/	?	O	o	o				u	u	u	u	o	■

Code Bank1 (0D-004)

b7~4 b3~0	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0001	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0010	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0011	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0100	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0101	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0110	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
0111	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1000	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1001	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1010	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1011	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1100	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1101	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1110	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±
1111	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±	±

Code Bank2 (0D-004)


b7~4 b3~0	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000				é	á	ē	l	ē	ð	ŷ	æ	á	á	á	á	á
0001			ú	á	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē
0010			ē	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē	ē
0011			á	á	á	á	á	á	á	á	á	á	á	á	á	á
0100			á	á	á	á	á	á	á	á	á	á	á	á	á	á
0101			á	á	á	á	á	á	á	á	á	á	á	á	á	á
0110			á	á	á	á	á	á	á	á	á	á	á	á	á	á
0111			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1000			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1001			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1010			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1011			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1100			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1101			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1110			á	á	á	á	á	á	á	á	á	á	á	á	á	á
1111			á	á	á	á	á	á	á	á	á	á	á	á	á	á


Code Bank3 (0D-004)

b7~4 b3~0	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0001			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0010			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0011			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0100			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0101			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0110			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
0111			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1000			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1001			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1010			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1011			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1100			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1101			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1110			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗
1111			⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗

3. QUALITY ASSURANCE SYSTEM

3.1 Quality Assurance Flow Chart

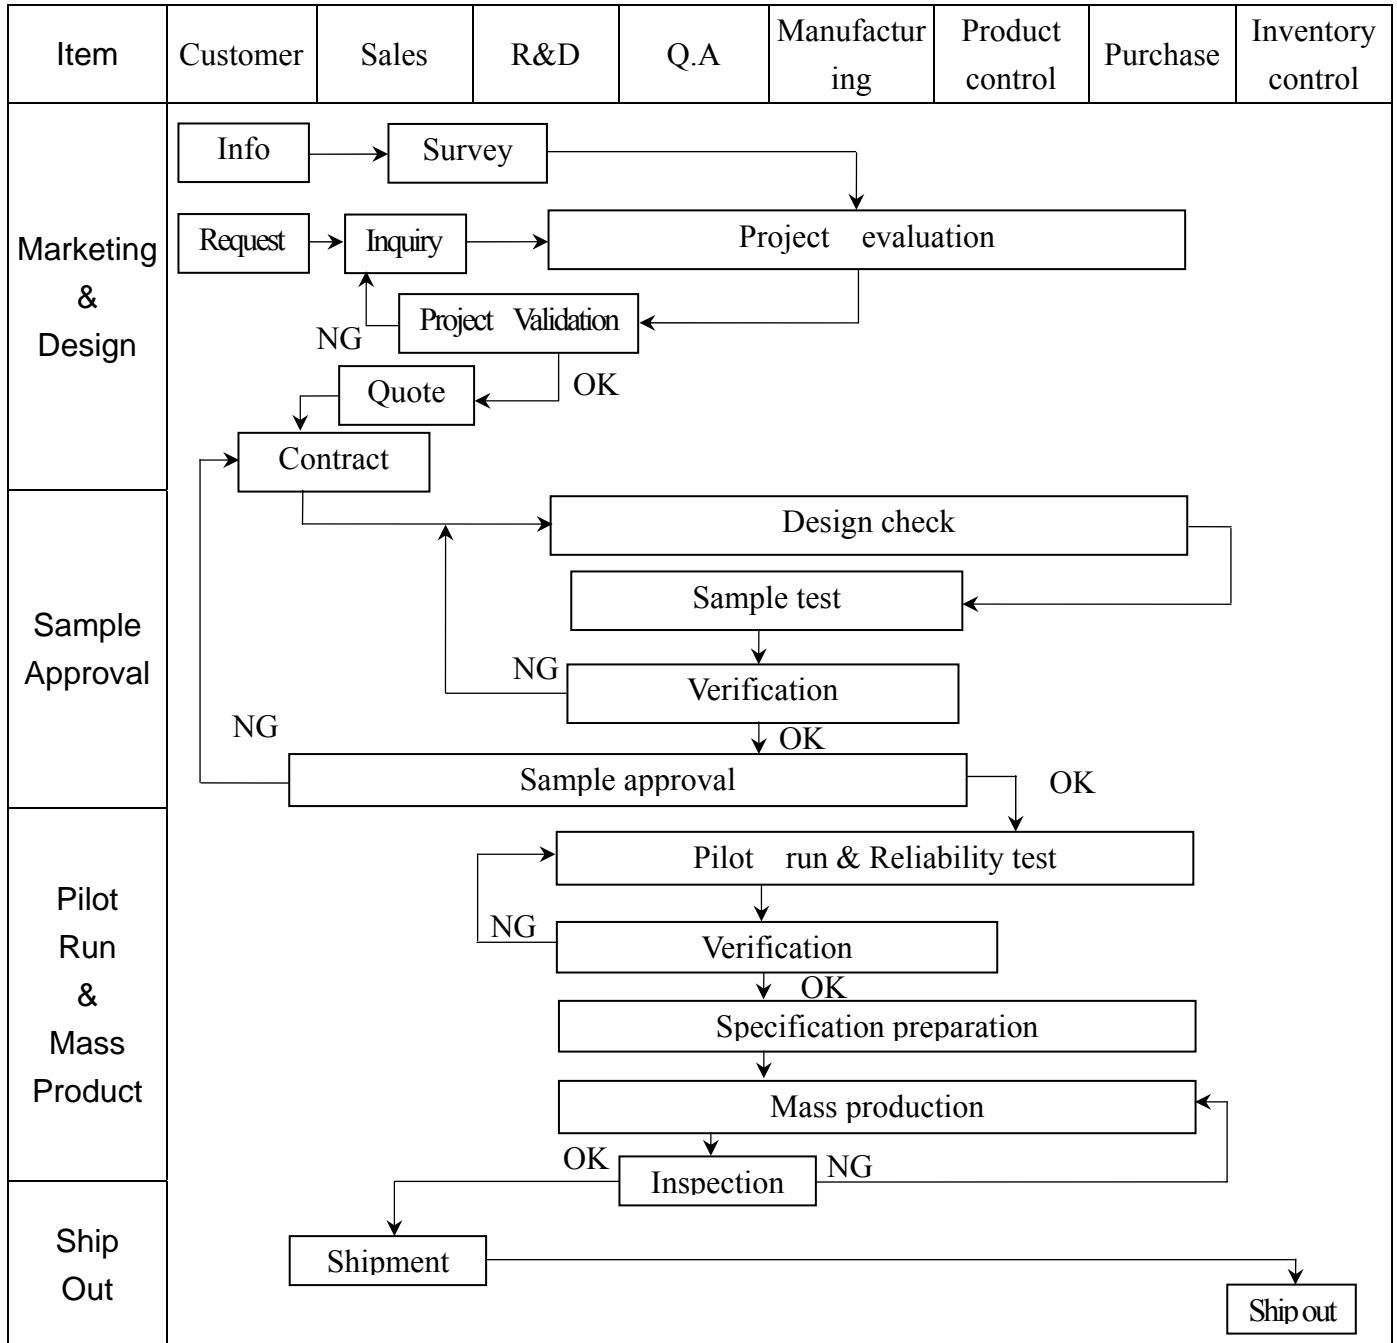

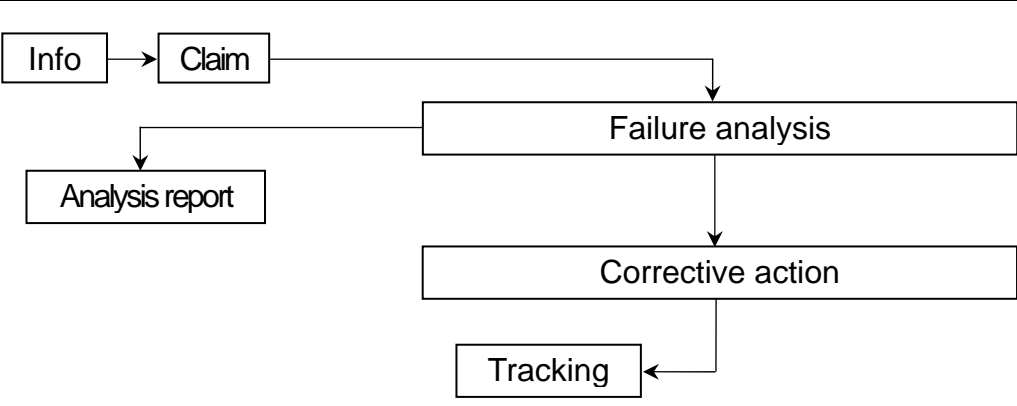Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Claim --> Report[Analysis report] Failure --> Action[Corrective action] Action --> Tracking[Tracking] </pre>							
Q.A Activity	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education And Training Activities			

3.2 Inspection Specification

◆ Scope : The document shall be applied to LCD Module for Monotype and Color STN(Ver. B01).

◆ Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II .

◆ Equipment : Gauge 、 MIL-STD 、 Powertip Tester 、 Sample

◆ Defect Level : Major Defect AQL : 0.4 ; Minor Defect : AQL : 1.5 .

◆ OUT Going Defect Level : Sampling .

◆ Manner of appearance test :

(1). The test be under 20W×2 fluorescent light ' and distance of view must be at 30 cm.

(2). Standard of inspection : (Unit : mm)

(3). The test direction is base on about around 45° of vertical line. (Fig. 1)

(4). Definition of area . (Fig. 2)

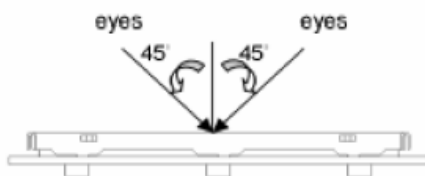


Fig.1

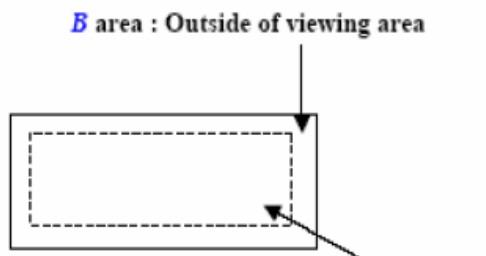




Fig. 2 A area : viewing area

◆ Specification:

NO	Item	Criterion	Level
01	Product condition	1. 1 The part number is inconsistent with work order of Production.	Major
		1. 2 Mixed production types.	Major
		1. 3 Assembled in inverse direction.	Major
02	Quantity	2. 1 The quantity is inconsistent with work order of production.	Major
03	Outline dimension	3. 1 Product dimension and structure must conform to Structure diagram.	Major
04	Electrical Testing	4. 1 Missing line character and icon.	Major
		4. 2 No function or no display.	Major
		4. 3 Output data is error.	Major
		4. 4 LCD viewing angle defect.	Major
		4. 5 Current consumption exceeds product specifications.	Major


◆ Specification For Monotype and Color STN :

(Ver. B01)

NO	Item	Criterion	Level																																						
05	<p>Black or white dot、scratch、contamination</p> <p>Round type</p>  <p>$\Phi = (x+y)/2$</p> <p>Line type</p> 	<p>5. 1 Round type:</p> <p>5. 1. 1 display only :</p> <ul style="list-style-type: none"> • White and black spots on display ≤ 0.30 mm , no more than 4 white or black spots present. • Densely spaced : NO more than two spots or lines within 3 mm. <p>5. 1. 2 Non-display :</p> <table border="1" data-bbox="488 685 1329 1043"> <thead> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.10$</td> <td colspan="2">Accept no dense</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.20$</td> <td colspan="2">3</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.30$</td> <td colspan="2">2</td> </tr> <tr> <td>Total quantity</td> <td colspan="2">4</td> </tr> </tbody> </table> <p>5. 1. 3 Line type:</p> <table border="1" data-bbox="440 1122 1378 1473"> <thead> <tr> <th colspan="2">Dimension</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>Length (L)</th> <th>Width (W)</th> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td>---</td> <td>$W \leq 0.03$</td> <td>Accept no dense</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$L \leq 3.0$</td> <td>$0.03 < W \leq 0.05$</td> <td rowspan="2">4</td> </tr> <tr> <td>$L \leq 2.5$</td> <td>$0.05 < W \leq 0.075$</td> </tr> <tr> <td>---</td> <td>$W > 0.075$</td> <td colspan="2">As round type</td> </tr> </tbody> </table>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.10$	Accept no dense		$0.10 < \Phi \leq 0.20$	3		$0.20 < \Phi \leq 0.30$	2		Total quantity	4		Dimension		Acceptance (Q'ty)		Length (L)	Width (W)	A area	B area	---	$W \leq 0.03$	Accept no dense	Ignore	$L \leq 3.0$	$0.03 < W \leq 0.05$	4	$L \leq 2.5$	$0.05 < W \leq 0.075$	---	$W > 0.075$	As round type		Minor
Dimension (diameter : Φ)	Acceptance (Q'ty)																																								
	A area	B area																																							
$\Phi \leq 0.10$	Accept no dense																																								
$0.10 < \Phi \leq 0.20$	3																																								
$0.20 < \Phi \leq 0.30$	2																																								
Total quantity	4																																								
Dimension		Acceptance (Q'ty)																																							
Length (L)	Width (W)	A area	B area																																						
---	$W \leq 0.03$	Accept no dense	Ignore																																						
$L \leq 3.0$	$0.03 < W \leq 0.05$	4																																							
$L \leq 2.5$	$0.05 < W \leq 0.075$																																								
---	$W > 0.075$	As round type																																							
06	Polarizer Bubble	<table border="1" data-bbox="440 1541 1378 1944"> <thead> <tr> <th rowspan="2">Dimension (diameter : Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.20$</td> <td colspan="2">Accept no dense</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.50$</td> <td colspan="2">3</td> </tr> <tr> <td>$0.50 < \Phi \leq 1.00$</td> <td colspan="2">2</td> </tr> <tr> <td>$\Phi > 1.00$</td> <td colspan="2">0</td> </tr> <tr> <td>Total quantity</td> <td colspan="2">4</td> </tr> </tbody> </table>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.20$	Accept no dense		$0.20 < \Phi \leq 0.50$	3		$0.50 < \Phi \leq 1.00$	2		$\Phi > 1.00$	0		Total quantity	4		Minor																		
Dimension (diameter : Φ)	Acceptance (Q'ty)																																								
	A area	B area																																							
$\Phi \leq 0.20$	Accept no dense																																								
$0.20 < \Phi \leq 0.50$	3																																								
$0.50 < \Phi \leq 1.00$	2																																								
$\Phi > 1.00$	0																																								
Total quantity	4																																								



◆ Specification For Monotype and Color STN :

(Ver. B01)

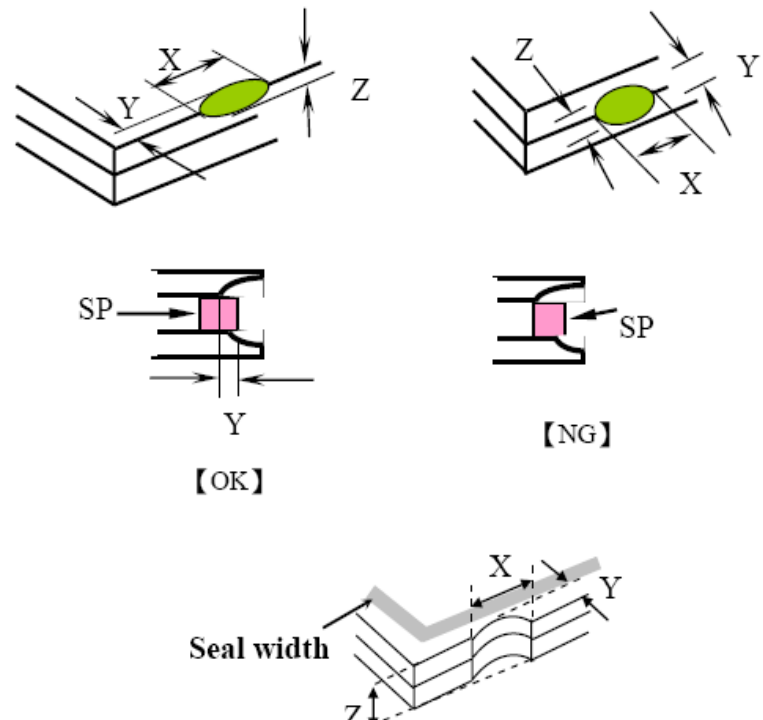NO	Item	Criterion	Level						
07	The crack of glass	<p>Symbols :</p> <p>X : The length of crack Y : The width of crack. Z : The thickness of crack W : terminal length t : The thickness of glass a : LCD side length</p>	Minor						
		<p>7.1 General glass chip :</p> <p>7.1.1 Chip on panel surface and crack between panels:</p>  <table border="1" data-bbox="502 1579 1300 1881"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq a$</td> <td>Crack can't enter viewing area</td> <td>$\leq 1/2 t$</td> </tr> <tr> <td>$\leq a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </tbody> </table>		X	Y	Z	$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$
X	Y	Z							
$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$							
$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$							



◆ Specification For Monotype and Color STN :

(Ver. B01)

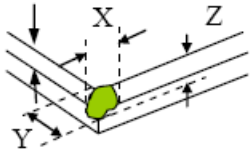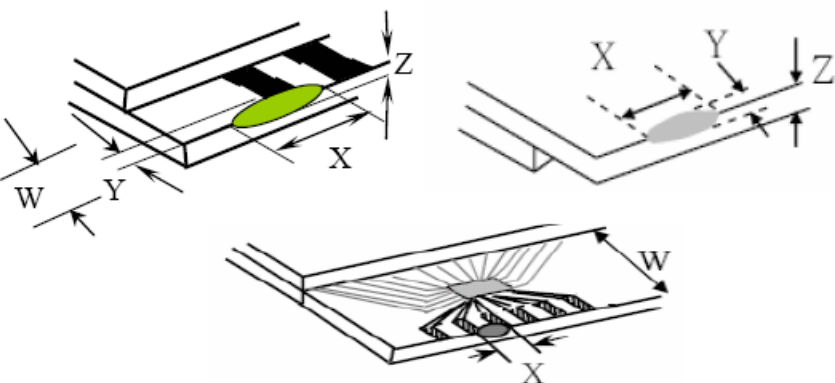NO	Item	Criterion	Level									
07	The crack of glass	<p>Symbols :</p> <p>X : The length of crack Z : The thickness of crack t : The thickness of glass</p> <p>Y : The width of crack. W : terminal length a : LCD side length</p> <hr/> <p>7.1.2 Corner crack :</p>  <table border="1" data-bbox="501 806 1316 1097"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq 1/5 a$</td> <td>Crack can't enter viewing area</td> <td>$Z \leq 1/2 t$</td> </tr> <tr> <td>$\leq 1/5 a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </tbody> </table>	X	Y	Z	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$	Minor
		X	Y	Z								
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$										
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$										
<p>7.2 Protrusion over terminal :</p> <p>7.2.1 Chip on electrode pad :</p>  <table border="1" data-bbox="466 1680 1252 1854"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Front</td> <td>$\leq a$</td> <td>$\leq 1/2 W$</td> <td>$\leq t$</td> </tr> <tr> <td>Back</td> <td colspan="3">Neglect</td> </tr> </tbody> </table>		X	Y	Z	Front	$\leq a$	$\leq 1/2 W$	$\leq t$	Back	Neglect		
	X	Y	Z									
Front	$\leq a$	$\leq 1/2 W$	$\leq t$									
Back	Neglect											

◆ Specification For Monotype and Color STN :

(Ver. B01)

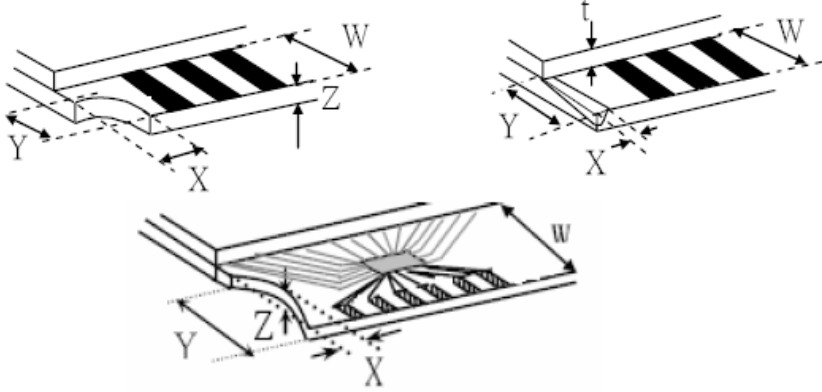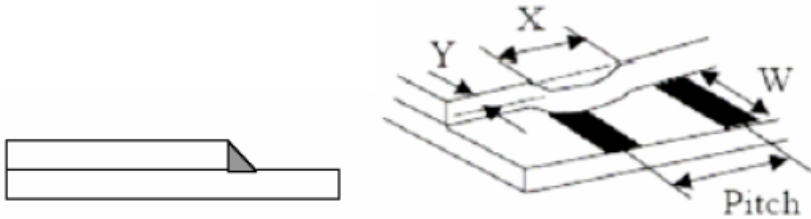NO	Item	Criterion	Level									
07	The crack of glass	<p>Symbols :</p> <p>X : The length of crack Y : The width of crack. Z : The thickness of crack W : terminal length t : The thickness of glass a : LCD side length</p>	Minor									
		<p>7.2.2 Non-conductive portion :</p>  <table border="1" data-bbox="580 1077 1206 1238"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq 1/3 a$</td> <td>$\leq W$</td> <td>$\leq t$</td> </tr> </tbody> </table> <p>⊙ If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>7.2.3 Glass remain :</p>  <table border="1" data-bbox="501 1789 1190 1937"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq a$</td> <td>$\leq 1/3 W$</td> <td>$\leq t$</td> </tr> </tbody> </table>		X	Y	Z	$\leq 1/3 a$	$\leq W$	$\leq t$	X	Y	Z
X	Y	Z										
$\leq 1/3 a$	$\leq W$	$\leq t$										
X	Y	Z										
$\leq a$	$\leq 1/3 W$	$\leq t$										

◆ Specification For Monotype and Color STN :

(Ver. B01)

NO	Item	Criterion	Level
08	Backlight elements	8. 1 Backlight can't work normally.	Major
		8. 2 Backlight doesn't light or color is wrong.	Major
		8. 3 Illumination source flickers when lit.	Major
09	General appearance	9. 1 Pin type must match type in specification sheet.	Major
		9. 2 No short circuits in components on PCB or FPC.	Major
		9. 3 Product packaging must the same as specified on packaging specification sheet.	Minor
		9. 4 The folding and peeled off in polarizer are not acceptable.	Minor
		9. 5 The PCB or FPC between B/L assembled distance (PCB or FPC) is ≤ 1.5 mm.	Minor

5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully, do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320 \pm 10^{\circ}\text{C}$ and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM





5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

A B C D E F G H

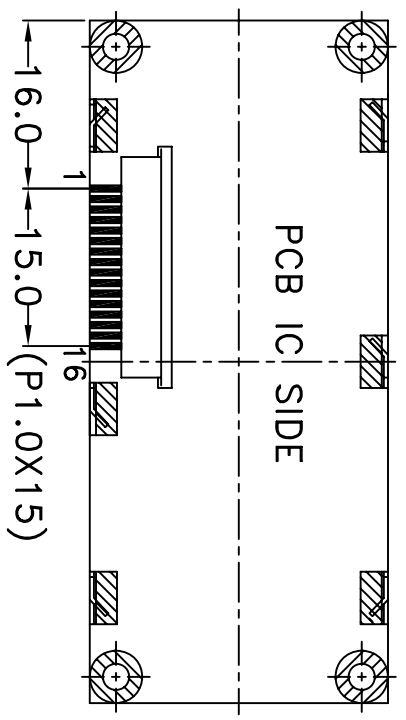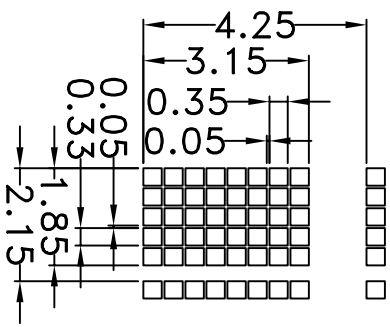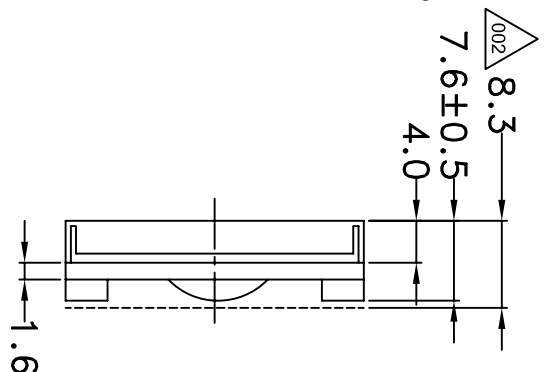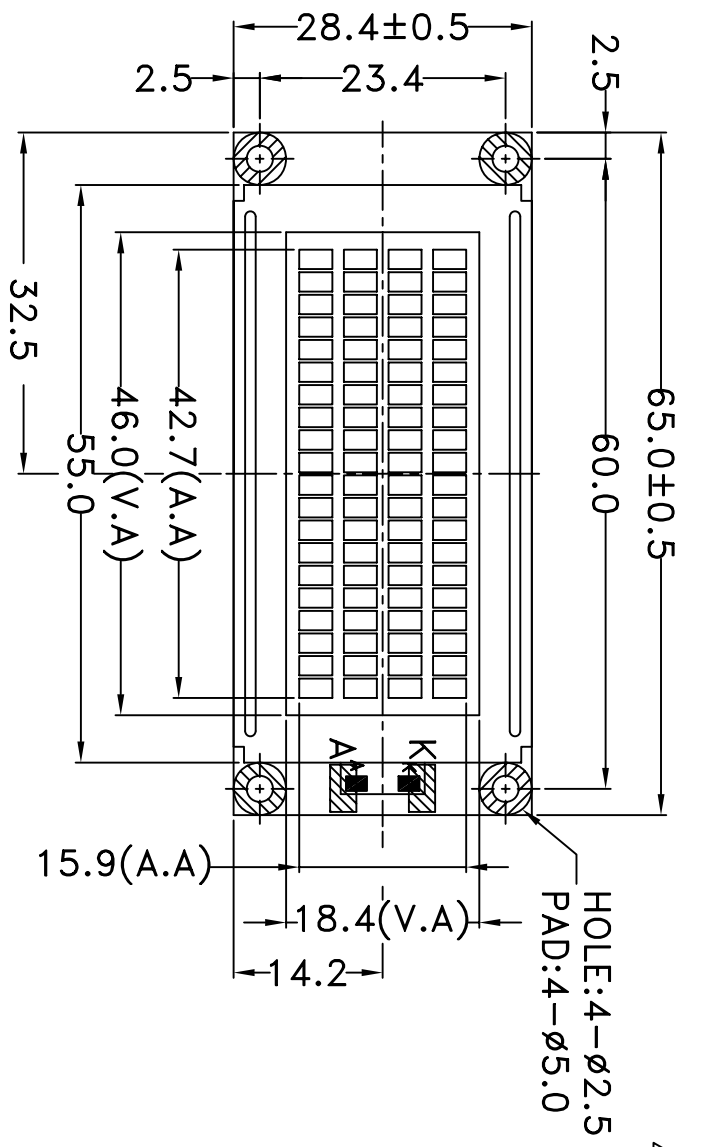

SCALE:5X

- NOTES:
- 1.LCD type:STN Gray,Positive,Transflective,6H
 - 2.Top=0°C~50°C,Tst=-20°C~70°C
 - 3.The tolerance unless classified ±0.3mm;
 - 4.This product conforms ROHS;

007				PART NO:	PC2004LRS-DMA-BC1Q		久正光電股份有限公司 POWER TIP TECHNOLOGY CORPORATION		Surface		公差標準 (mm)	精級
006				DRAWING NAME:	JLMD-PC2004LRS-DMA-BC1Q							
005						Design	Terry		Unit	MM	Material	1 ~ 4
004						Check	Eddy		Scale	1:1	Thickness	4 ~ 16
003						Approve	Ryan		Page	1/1	Quantity	63 ~ 250
002	MODIFY DIMENSION AND ADD NOTES		Terry	2010/12/03								250 ~ 1000
001	NEW DRAWING		Sally Hu	2010/09/27								
REV		REV BY	REVISER	DATE	LCD Module Drawing							

Ver.001

LCM包裝規格書

LCM Packaging Specifications

Documents NO.

JPKG-PC2004LRS-DMA-BC1Q

Approve

Check

Contact

Ryan

Eddy

Terry

1. 包裝材料規格表 (Packaging Material) : (per carton)


No.	Item	Model	Dimensions (mm)	1Pcs Weight	Quantity	Total Weight
1	成品(1)LCM	PC2004LRS-DMA-BC1Q	65*28.4*8.2	0.0197	468	9.2196
2	靜電袋 (2)BAG	BAG100100ARABA	100*100*0.05	0.0012	468	0.5616
3	氣泡墊(3)BAG	BAG290240BRBBA	240*290*5	0.0029	24	0.0696
4	刀卡A1(4)BX	BX29500047BZBA	295*47*4	0.011	168	1.848
5	刀卡B1(5)BX	BX24500047BZBA	245*47*4	0.01	48	0.48
6	C1內盒(6)Product Box	BX31025555AABA	310*255*55	0.221	12	2.652
7	外紙箱(7)Carton	BX52532536CCBA	525*325*360	1.092	1	1.092
8						
9						

2. 一整箱總重量 (Total LCD Weight in carton) : 15.92 Kg±10%

3. 單箱數量規格表 (Packaging Specifications and Quantity) :

(1)Quantity Of Spacer : A1刀卡 X 14 , B1刀卡 X 3

(2)Total LCM quantity in carton : quantity per box 39 x no. of boxes 12 = 468

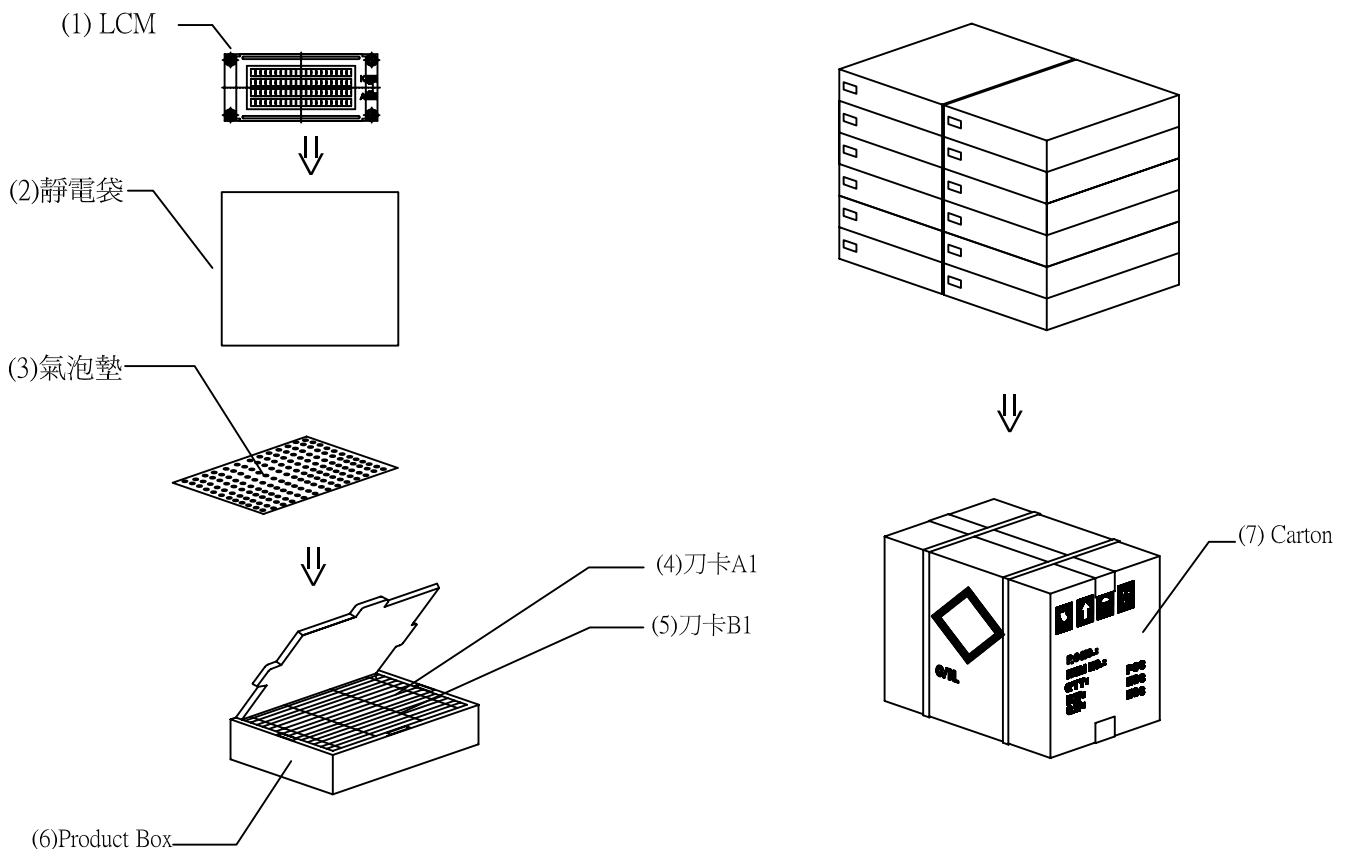

特 記 事 項 (REMARK)

1. Label Specifications :

MODEL:
LOT NO:
QUANTITY:
CHECK:

啤盒前,后各空一格