



D-SUB High Density Dip Type Female

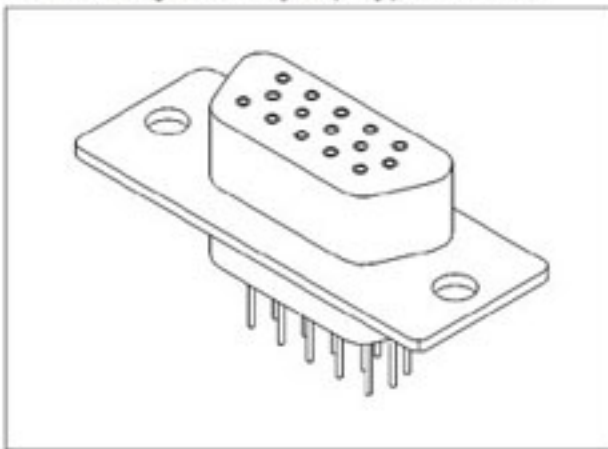

POSITION	A	B	C	D	E
15	30.80	24.99	16.33	2.29	19.30
26	39.10	33.32	24.66	2.29	27.50
44	53.00	47.04	38.38	2.29	41.30
62	69.30	63.50	54.84	2.41	57.70

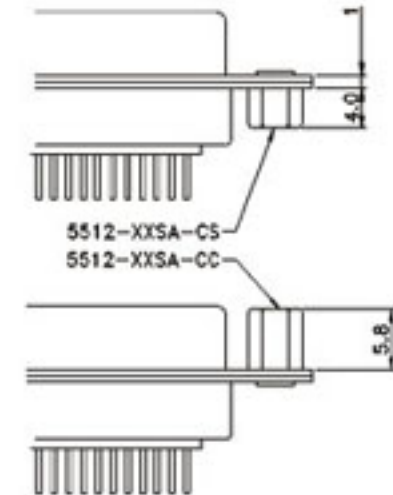

MATERIAL:

Housing : 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP
Insulator Resistance: 5000MΩ min.
at DC 500V.
Contact Resistance : 20mΩ max. at DC 100mA.
Operating Temperature : -55°C~+105°C.

ORDERING INFORMATION:

5512-XXS-XX

CS: Rear Rivet CC: Front Rivet
S: Machine Pin Female
SA: Stamp Pin Female
Number of Positions

