



D- SUB Connector Male/Female

MALE

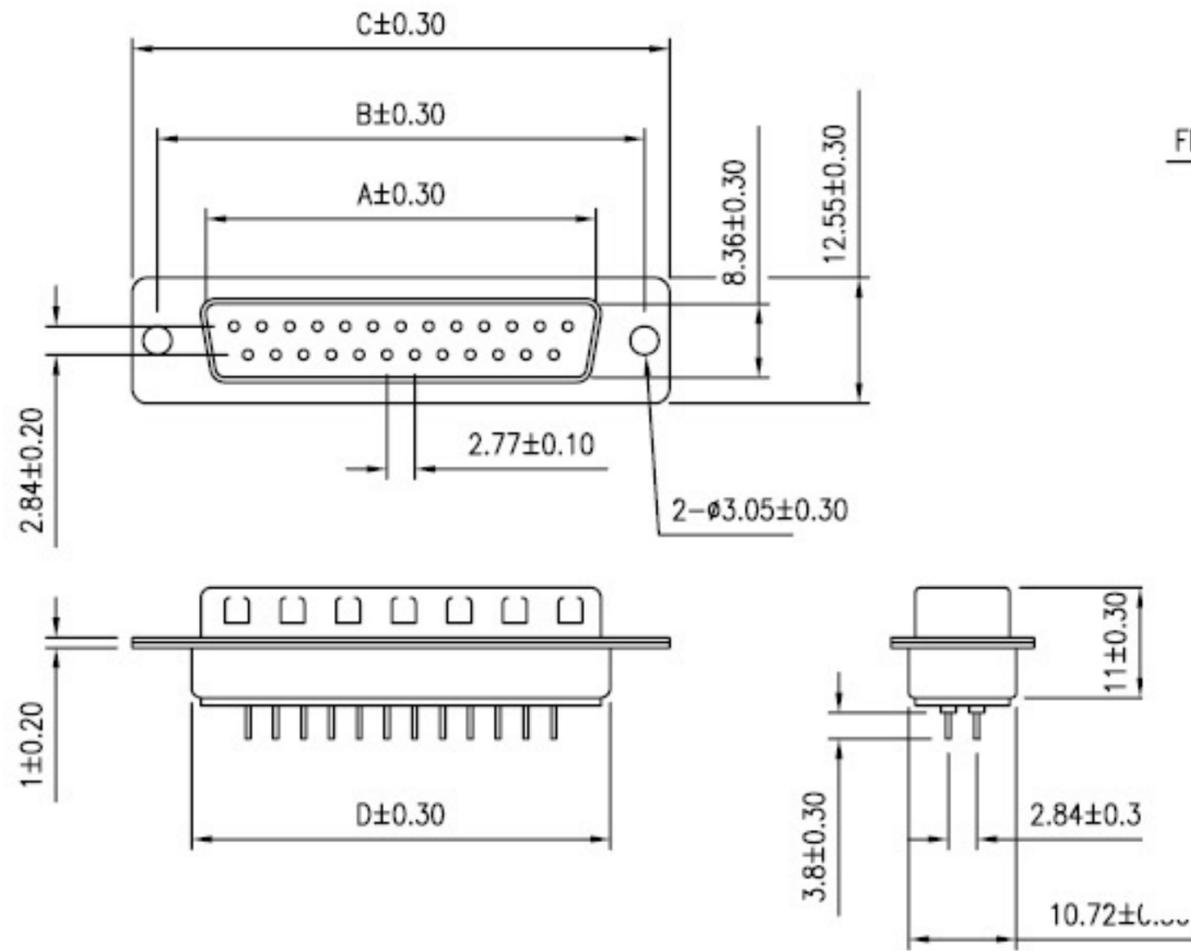

FEMALE

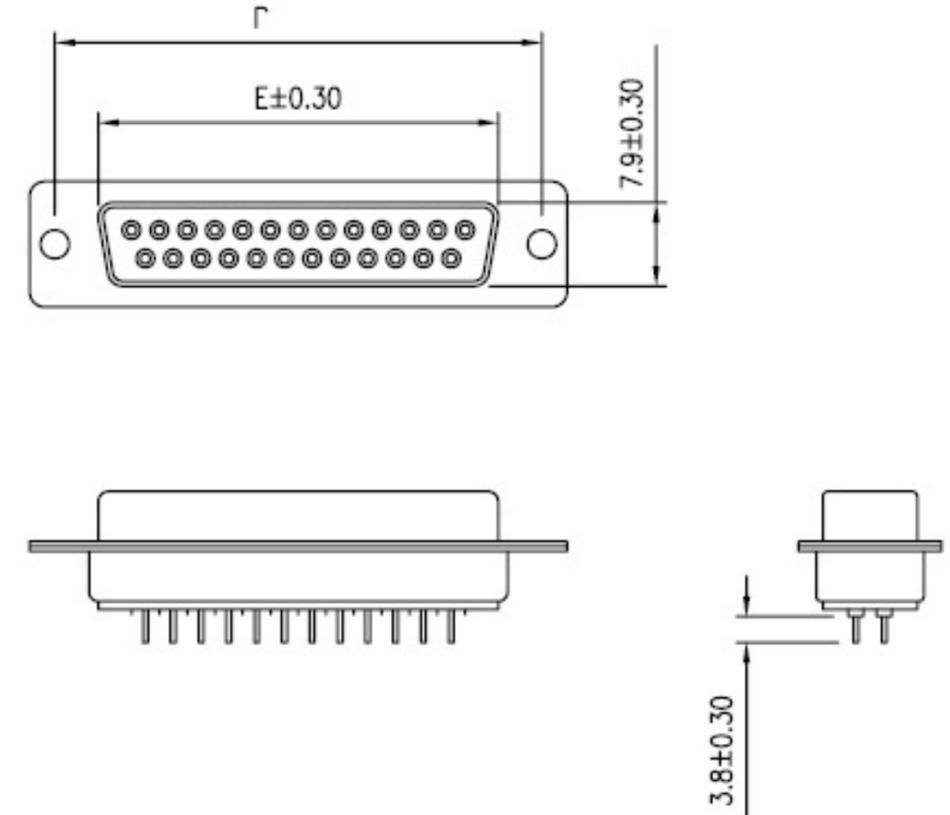


SPECIFICATION

- * Current Rating: 5 A
- * Withstanding Voltage: 1000 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C

MATERIAL

- * Contact: Brass , Selective Gold or All Gold
- * Insulator: PBT & 30% G. F.
- * Shell: Steel , Tin Plated

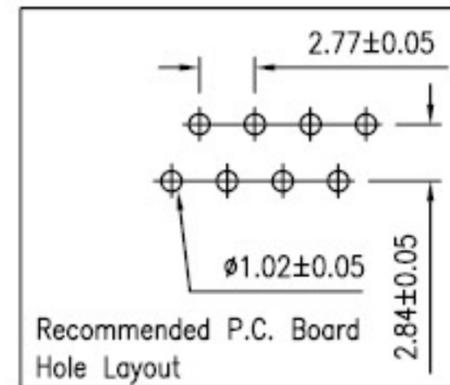

| PART NO. | A | B | C | D | E |
|--------------|-------|-------|-------|-------|-------|
| DS03-X-09-S1 | 16.92 | 24.99 | 30.81 | 19.28 | 16.33 |
| DS03-X-15-S1 | 25.25 | 33.32 | 39.14 | 27.51 | 24.66 |
| DS03-X-25-S1 | 38.96 | 47.04 | 53.04 | 41.30 | 38.38 |
| DS03-X-37-S1 | 55.42 | 63.50 | 69.32 | 57.71 | 54.84 |
| DS03-X-50-S1 | 52.86 | 61.11 | 66.90 | 55.30 | 52.34 |

ELEPARTS CO., LTD

| | | | |
|--------|----------|------------------------|----------|
| 0.0± | SCALE: | TITLE: D-SUB CONNECTOR | PART NO: |
| 0.00± | UNIT: MM | DIP Type | APP BY: |
| 0.000± | | MATL: PBT + 30% G.F. | CHK BY: |
| | | DWG. NO. DS03 | DR BY: |

