



No	신호명	색상	AWG	비고
1	U Phase	적	20	
2	V Phase	황	20	
3	W Phase	청	20	
4	FG			

AMP-172167-1, 170359-1
Rear Side



AMP-172171-1, 170359-1
Rear Side




OZBM60-013D2-RE,DE,GE


OZBM60-026D2-RE,DE,GE

OZBM60-040D2-RE,DE,GE

No	신호명	색상	AWG	비고	No	신호명	색상	AWG	비고
1	A	-	24		9	Hall B	-	24	
2	/A	-	24		10	Hall /B	-	24	
3	5V	-	24		11	Z	-	24	
4	Hall A	-	24		12	/Z	-	24	
5	Hall /A	-	24		13	GND	-	24	
6	B	-	24		14	Hall C	-	24	
7	/B	-	24		15	Hall /C	-	24	
8	GND	-	24						

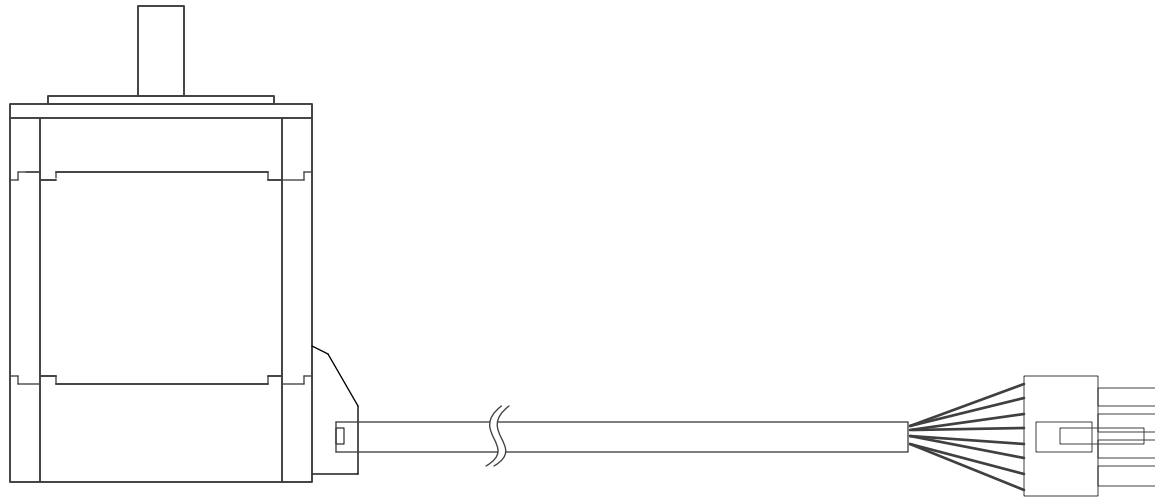


No	신호명	색상	AWG	비고
1	+5V	자	24	
2	U Phase	적	20	
3	V Phase	황	20	
4	W Phase	청	20	
5	GND	흑	24	
6	Hall A	갈	24	
7	Hall B	백	24	
8	Hall C	회	24	



OZBM60-020D2-D,G

OZBM60-040D2-D,G


OZBM60-060D2-D,G

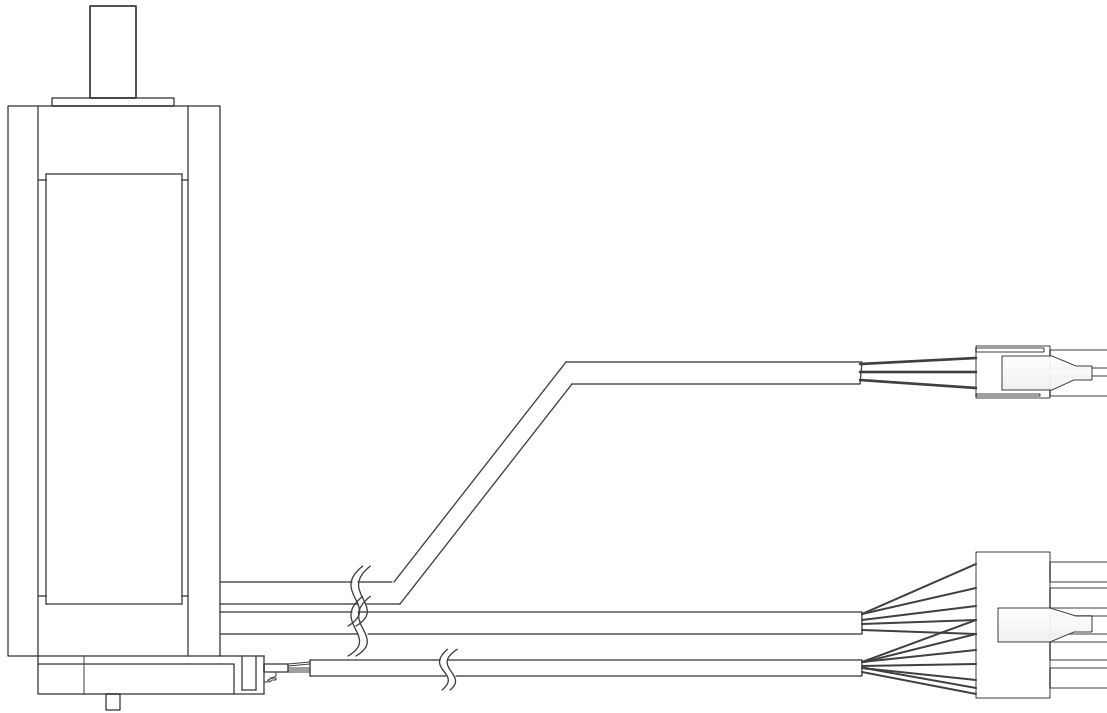


OZBM42-070D2-RE

No	신호명	색상	AWG	비고
1	U Phase	황	20	
2	V Phase	적	20	
3	W Phase	흑	20	
4	FG			

AMP-172167-1, 170359-1
Rear Side




AMP-172171-1, 170359-1
Rear Side




No	신호명	색상	AWG	비고	No	신호명	색상	AWG	비고
1	A	(녹)	(24)	엔코더	9	Hall B	녹	24	홀센서
2	/A	(백녹)	(24)	엔코더	10				
3	5V	적,(백갈)	26,(24)	홀센서, 엔코더	11	Z	(청)	24	엔코더
4	Hall A	청	26	홀센서	12	/Z	(백청)	24	엔코더
5					13	GND	(흑)	24	엔코더
6	B	(등)	(24)	엔코더	14	Hall C	백	24	홀센서
7	/B	(백등)	(24)	엔코더	15				
8	GND	흑,(갈)	26,(24)	홀센서, 엔코더					

참고 : 색표시 (백등) 백색 바탕에 등색 실선

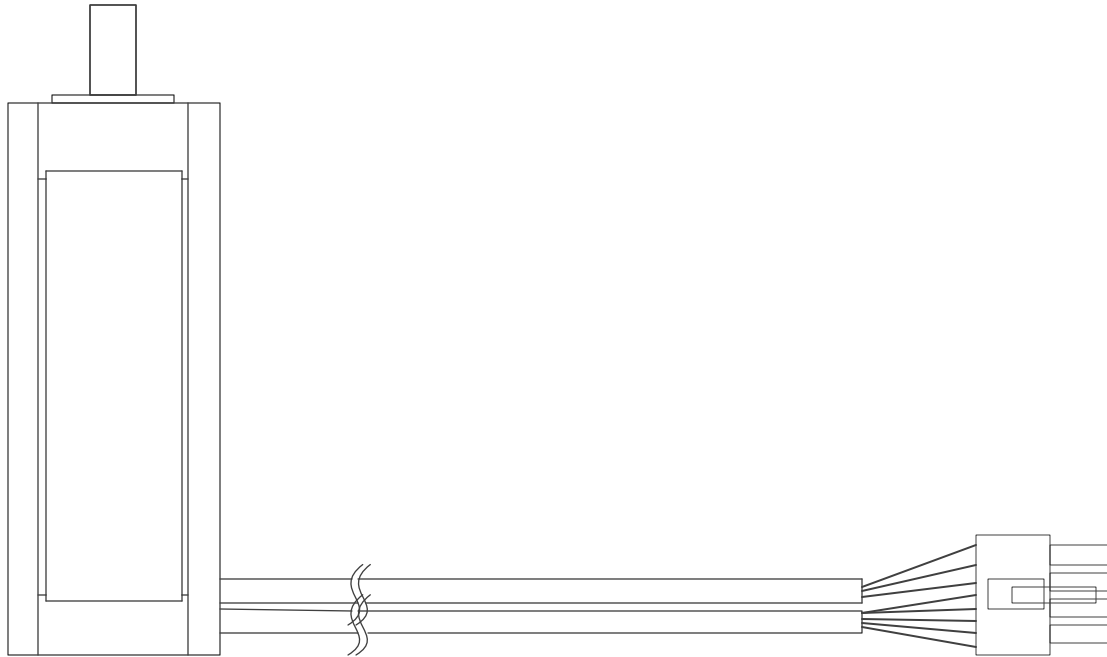

No	신호명	색상	AWG	비고
1	+5V	적	26	
2	U Phase	황	20	
3	V Phase	적	20	
4	W Phase	흑	20	
5	GND	흑	26	
6	Hall A	청	26	
7	Hall B	녹	26	
8	Hall C	백	26	



OZBM42-100D2-R