

UTC LM556

LINEAR INTEGRATED CIRCUIT

DUAL TIMER

DESCRIPTION


The UTC LM556 dual monolithic circuit is a highly stable controller capable of producing accurate delays or oscillation. The UTC LM556 is the dual of UTC NE555; timing is provided an external resistor and capacitor for each function. The two timers operate independently of each other, sharing only Vcc and GND. The circuits may be triggered and reset on falling wave forms. The output structures may sink or source 200mA.

FEATURES


- *High current driver capability(=200mA)
- *Adjustable duty cycle
- *Timing from μSec to Hours
- *Temperature stability of 0.005%/°C
- *TTL compatible
- *Operates in both Astable and Monostable modes

APPLICATIONS

- *Precision timing.
- *Pulse generator, shaping.
- *Time delay generator.
- *Sequential timing.
- *Pulse width modulation.
- *Traffic light control.
- *Touch tone encoder.
- *Tone burst generator.

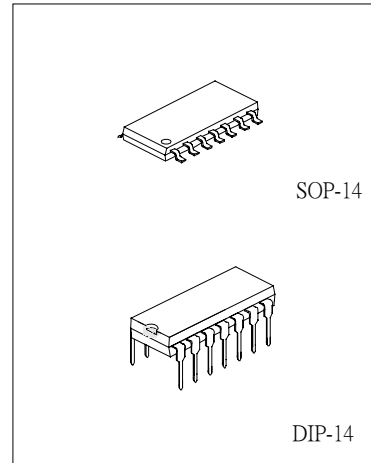

BLOCK DIAGRAM

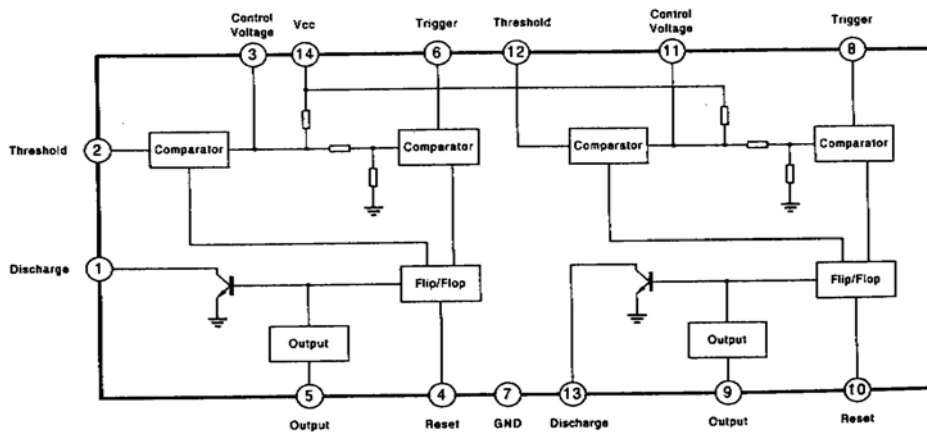

UTC

UNISONIC TECHNOLOGIES CO., LTD.

1

QW-R106-004,A

UTC LM556 LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	Vcc	16	V
Power Dissipation	Pd	600	mW
Lead Temperature(soldering 10 sec.)	Tlead	300	°C
Operating Temperature	Topr	-40~85	°C
Storage Temperature	Tstg	-65~150	°C

ELECTRICAL CHARACTERISTICS

(Ta=25°C ,Vcc=5 to 15V, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply voltage	Vcc		4.5		16	V
Supply Current(two timers) (low state), (Note 1)	Icc	Vcc=5V,RL=∞		5	12	mA
		Vcc=15V,RL=∞		16	30	mA
Timing Error(monostable)						
Initial Accuracy(Note 2)	ACCUR	RA=2KΩ to 100KΩ C=0.1μF T=1.1RC		0.75		%
Drift with Temperature	Δt/ΔT			50		ppm/°C
Drift with Supply Voltage	Δt/ΔVcc			0.1		%/V
Timing Error(astable)						
Initial Accuracy(Note 2)	ACCUR	RA=1KΩ to 100KΩ C=0.1μF Vcc=15V		2.25		%
Drift with Temperature	Δt/ΔT			150		ppm/°C
Drift with Supply Voltage	Δt/ΔVcc			0.3		%/V
Control Voltage	Vc	Vcc=15V	9.0	10.0	11.0	V
		Vcc=5V	2.6	3.33	4.0	V
Threshold Voltage	VTH	Vcc=15V	8.8	10.0	11.2	V
		Vcc=5V	2.4	3.33	4.2	V
Threshold Current(Note 3)	ITH			30	250	nA
Trigger Voltage	Vtr	Vcc=5V	1.1	1.6	2.2	V
		Vcc=15V	4.5	5	5.6	V
Trigger Current	Itr	Vtr=0		0.01	2.0	μA
Reset Voltage(Note 4)	Vrst		0.4	0.6	1.0	V
Reset Current	Irst			0.03	0.6	mA
Low Output Voltage	VOL	Vcc=15V Isink=10mA Isink=50mA Isink=100mA Isink=200mA		0.1	0.25	V
				0.4	0.75	V
				2	3.2	V
				2.5		V
	VOL	Vcc=5V Isink=5mA Isink=8mA				
				0.15	0.25	V
				0.25	0.35	V

UTC LM556

LINEAR INTEGRATED CIRCUIT

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High Output Voltage	VOH	Vcc=15V Isource=200mA Isource=100mA				
				12.5		V
			12.75	13.3		V
		Vcc=5V Isource=100mA				
			2.75	3.3		V
Rise Time of Output	tR			100	300	nSec
Fall Time of Output	tF			100	300	nSec
Discharge Leakage Current	ILKG			20	100	nA
Matching Parameter						
Initial Accuracy(Note 5)	ACCUR	RA, RB=1KΩ to 100KΩ C=0.1μF Vcc=15V		1	2	%
Drift with Temperature	Δt/ΔT			10		ppm/°C
Drift with Supply Voltage	Δt/ΔVcc			0.2	0.5	%/V

Note 1: Supply current when output is high is typically 1mA less at Vcc 5V.

Note 2: Tested at Vcc=5V and Vcc=15V.

Note 3: This will determine the maximum value of RA+RB for 15V operation, The maximum total is R=20MΩ, and for 5V operation the maximum total is R=6.6MΩ.

Note 4: As reset voltage lower, timing is inhibited and then the output goes low.

Note 5: Matching parameters refer to the difference between performance parameters of each timer section in the monostable mode.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

UTC

UNISONIC TECHNOLOGIES CO., LTD.

3

QW-R106-004,A