

스텝 모터 (Model : SE-SM243) 스펙

(주)뉴티씨(NEWTC)

<http://www.NewTC.co.kr>



■ Application

소형 이동 로봇
 컨트롤 장비


■ Specification

Voltage (V)	Current (A)	Resistance (Ω)	Inductance (mH)	Holding Torque (Kg \cdot cm)	Detent Torque (g \cdot cm)	Rotor Inertia (g \cdot cm ²)	Weight (g)
4.1	0.95	4.2 \pm 10%	2.6 \pm 20%	1.7	230	33	200

Note

1. The drive system be based on 2 phase-excitation by constant current driving.
2. Please do not drop or shock against hard material.
3. Please do not disassemble motor.
4. Please do not machine the motor shaft without a proper tool for the assurance of motor performance


■ Circuit Diagram

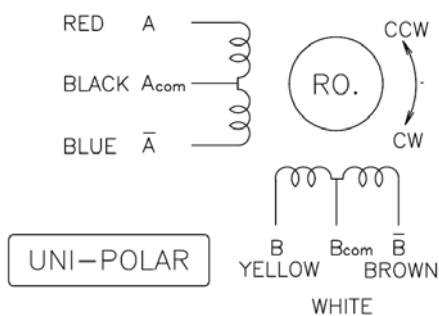

▶ Pin connection

1	2	3	4	5	6
RED (A)	BLACK (Com)	BLUE (/A)	YELLOW (B)	WHITE (Com)	BROWN (/B)

■ Dimension


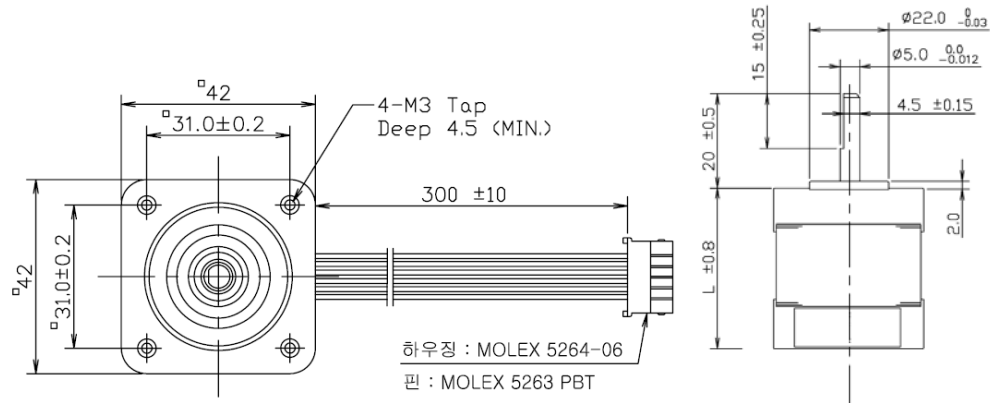


■ 사용 방법



스텝핑 모터 구동모듈 AM-CS2(P)

입력 신호 : A, /A, B, /B 각 상의 신호

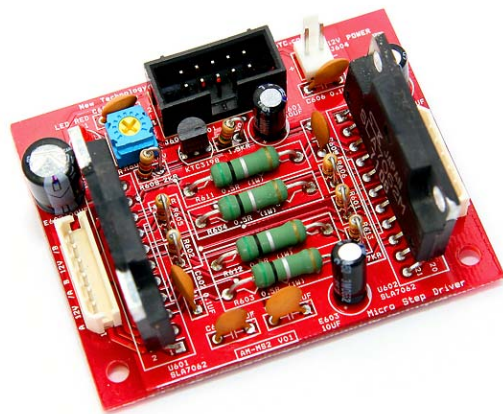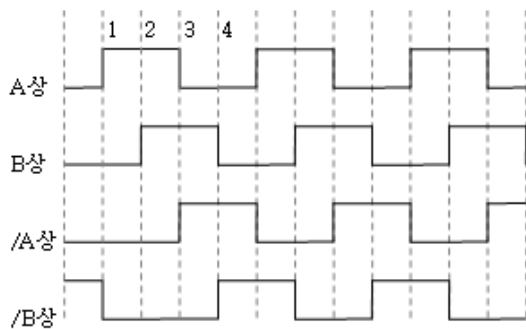

스텝핑 모터 클럭 구동모듈 AM-MS2

입력 신호 : Dir(방향), CLK(속도) 신호

